

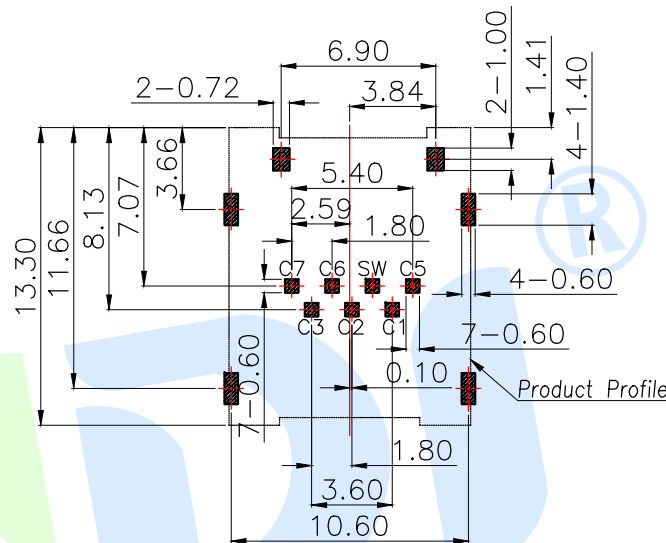
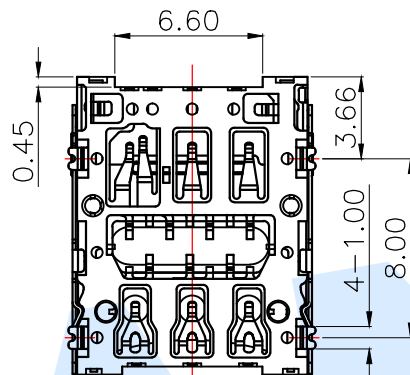


RoHS

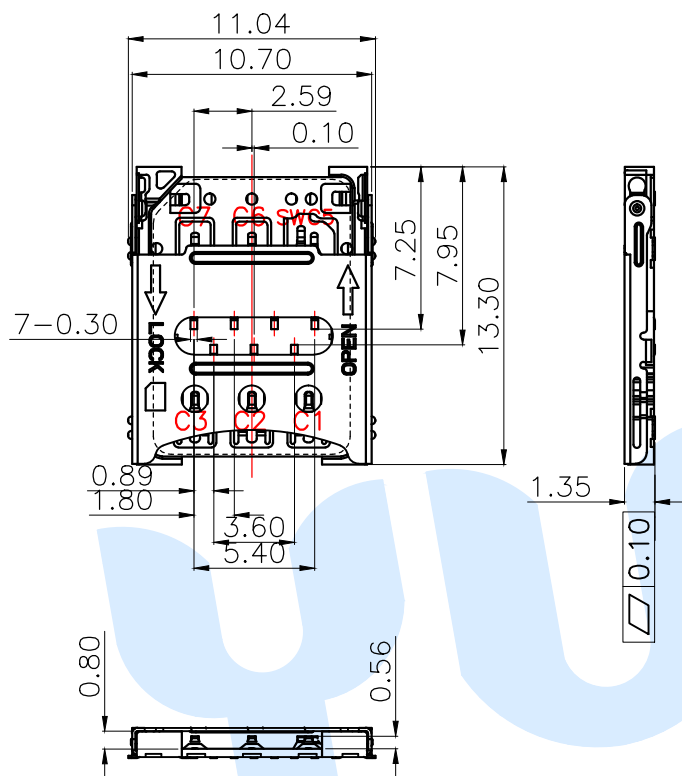

RECOMMENDED PCB LAYOUT  
GENERAL TOLERANCE  $\pm 0.05$

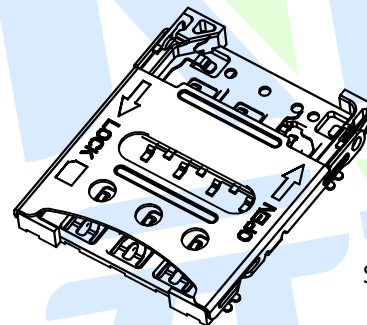


3D VIEW

Specifications/技术规格:

- 1.Current rating/额定电流: 1.0A
- 2.Voltage rating/额定电压: 50V DC
- 3.Insulation Resistance/绝缘电阻: 100M $\Omega$  Min
- 4.Dielectric Withstanding/ 耐电压: 500V AC/minute
- 5.Contact Resistance/ 接触电阻: 100m $\Omega$  Max
- 6.Durability/ 耐久性: 5,000 Insertions
- 7.Operating Temperature/ 工作温度: -25 $^{\circ}$ C to +85 $^{\circ}$ C


| SIM CARD |            |
|----------|------------|
| PIN#     | Name       |
| C1       | VCC供电电压    |
| C2       | RST重置      |
| C3       | CLK时钟      |
| C5       | GND接地      |
| C6       | VPP程序电压    |
| C7       | I/O输入输出    |
| S/W      | Switch Pin |

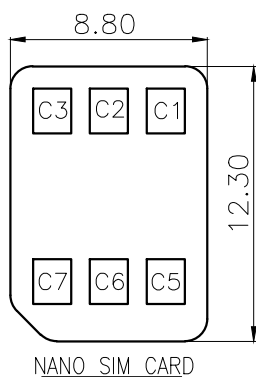

STEP 1 INSERT Nano-SIM CARD



STEP 2 PUSH THE SHELL



STEP 3 FINISH

|     |          |                                                                                       |     |                 |                                                                                       |
|-----|----------|---------------------------------------------------------------------------------------|-----|-----------------|---------------------------------------------------------------------------------------|
| ①   | Terminal |  | 7   | Phosphor bronze | Au plated                                                                             |
| ②   | Contact  |  | 7   | Phosphor bronze | Au plated                                                                             |
| ③   | Cover    |  | 1   | SUS             |  |
| ④   | Base     |  | 1   | LCP             | Black                                                                                 |
| NO. | Name     | Number                                                                                | Qty | Materil         | Remarks                                                                               |




YUANDI® Yuandi Electronics Co.,Ltd

|          |      |       |                         |
|----------|------|-------|-------------------------|
| design   | date | name  | NANO SIM CARD CONNECTOR |
| Review   | date | model | NANO-SIM-503            |
| Approved | date |       |                         |


Drawing number: A4

modify Review Approved Tolerance not specified Proportion 1:1 unit mm gage number


RoHS

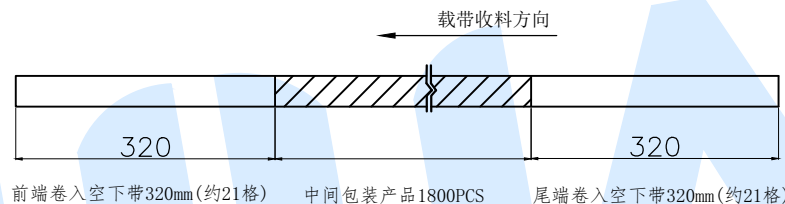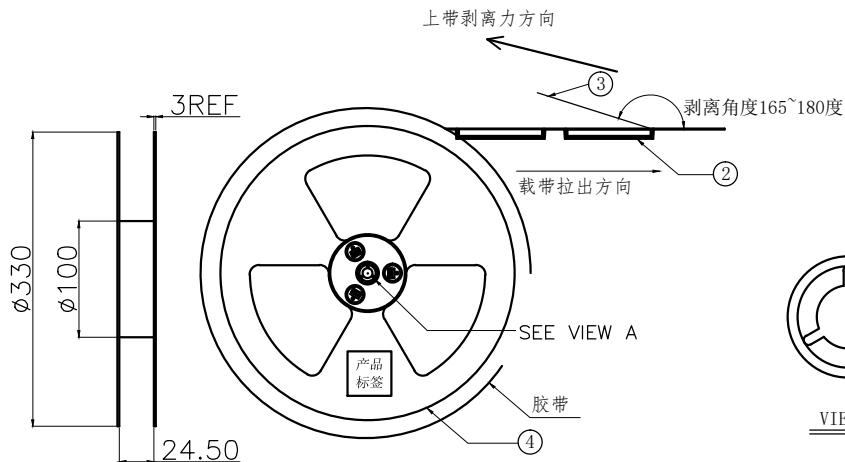

前端卷入空下带320mm(约21格) 中间包装产品1800PCS 尾端卷入空下带320mm(约21格)

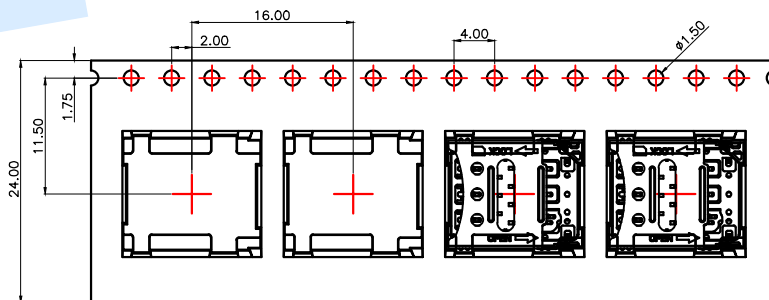

PULL OUT DIRECTION 拉出方向

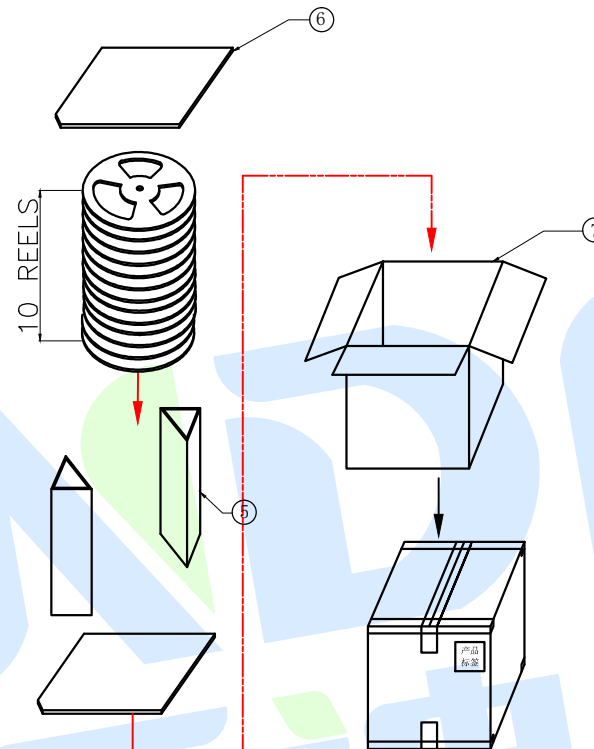

YUANDI® Yuandi Electronics Co.,Ltd

|          |      |       |                         |
|----------|------|-------|-------------------------|
| design   | date | name  | NANO SIM CARD CONNECTOR |
| Review   | date | model | NANO-SIM-503            |
| Approved | date |       |                         |

Drawing number: Proportion 1:1 unit mm gage number A4

modify

Review

Approved

Tolerance not specified

Proportion

1:1

unit

mm

gage number

A4