
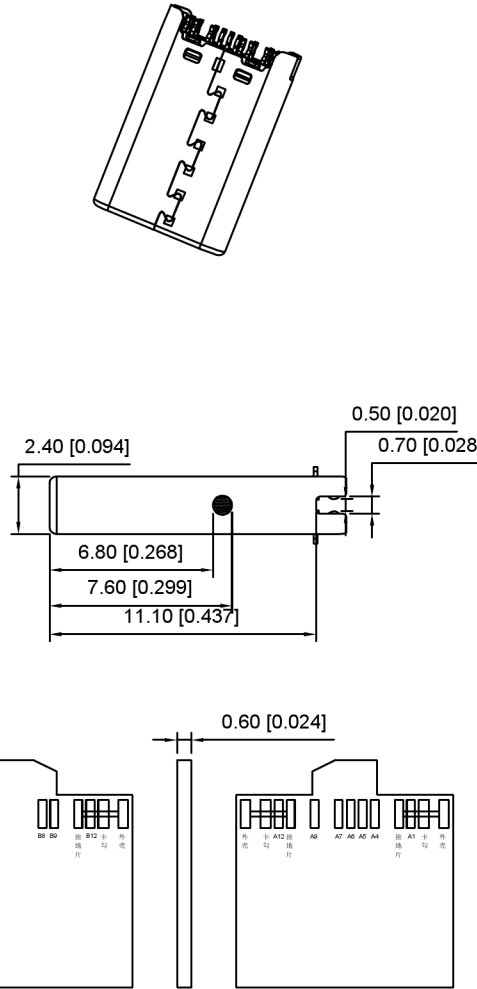


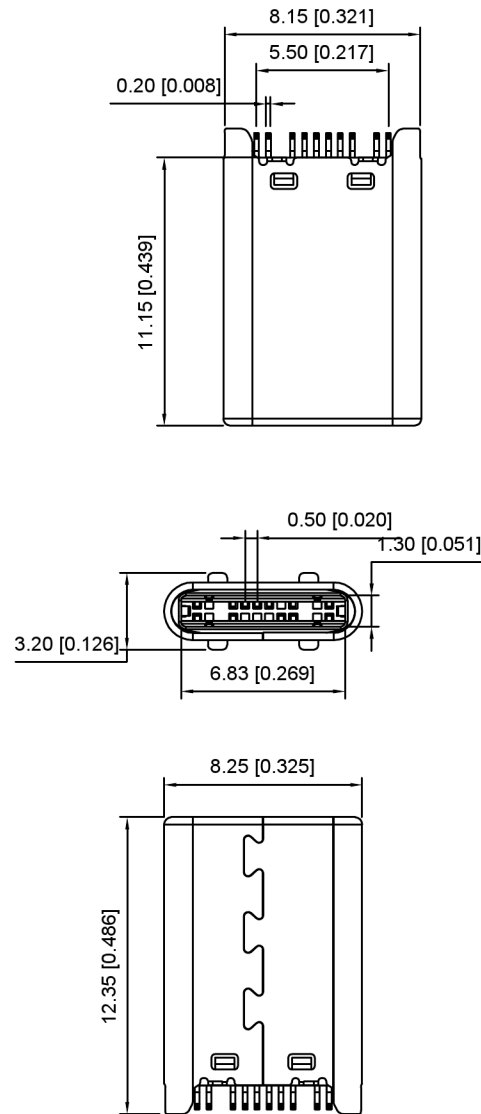

XKB Connectivity

备注 NOTE:

1.材质 MATERIAL:

1.1胶芯 INSULATOR: LCP+30%G.F

1.2端子 CONTACT: C7025, T=0.20mm;
Half-gold-plated matte tin 30U"1.3外壳 SHELL: STEEL, T=0.15mm;
Nickel plated on the surface1.4卡钩 Hook: STEEL, T=0.40mm;
Nickel plated on the surface

2.电气特性 ELECTRICAL CHARACTERISTICS:

2.1额定电流: 0.5A

2.2接触阻抗 CONTACT RESISTANCE: 40mΩ MAX

2.3绝缘阻抗 Insulation resistance: 100MΩ MIN 250V DC

2.4耐压测试 DIELECTRIC WITHSTANDING VOLTAGE: 100V AC

2.5沾锡性: 温度245±5℃, 时间5±0.5s

2.6整体插入力 Overall insertion force: 2.0kgf MAX

耐久前整体拔出力 Overall pull-out force before durability :0.8kgf MIN

耐久后整体拔出力 Overall pull-out force after durability:0.6kgf MIN

2.7使用寿命 DURABILITY: 10000次

2.8工作温度 OPERATING TEMPERATURE: -25℃~+80℃

XKB Connectivity

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3		B10	
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1		
A7	DN1		
A8			
A9	VBUS	B4	VBUS
A10			
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

XKB Connectivity

U261-16XN-4BJ124

1:AU 1U"
2:AU 3U"
5:AU 15U"
6:AU 30U"W:WHITE
B:BLACK1:PBT
2:PA6T
5:PA9T
6:LCP

广东星坤科技股份有限公司

文件工程章

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
ANGLAR	±5°			
L ≤ 4	±0.2			
4 < L ≤ 16	±0.3			
16 < L ≤ 63	±0.4			
L > 63	±0.5			

XKB

XKB INDUSTRIAL PRECISION CO., LIMITED

DSND		SCALE: N/A	MODEL TYPE: Type-C 3.1
DWN		VIEW:	PART NO.:
CHKD		UNIT: mm/in	DWG NO.: U261-16XN-4BJ124
APPD		SIZE: A4	WEIGHT
			SHEET 1/1
			REVISION A0