

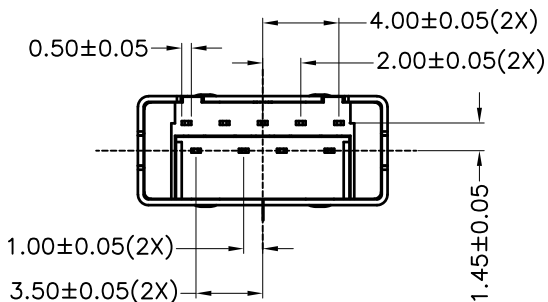
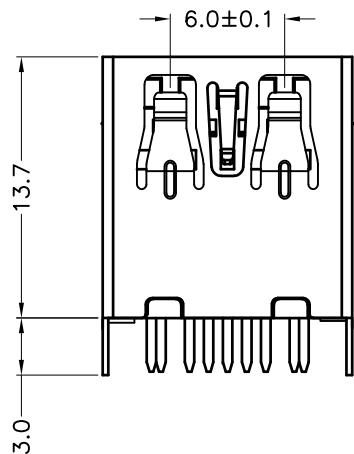
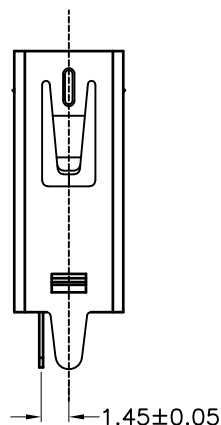
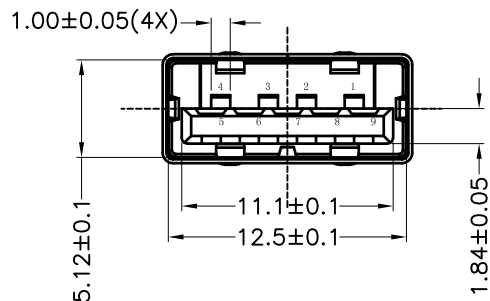





5	USB 3.0 A/F 180° 母座 外壳	C2680 T=0.3	1
4	USB 3.0 A/F 180° 母座 下端子	C2680 T=0.2	5
3	USB 3.0 A/F 180° 母座 上端子	C2680 T=0.2	4
2	USB 3.0 A/F 180° 母座5P胶芯	LCP(PBT)+30%GF	1
1	USB 3.0 A/F 180° 母座4P胶芯	LCP(PBT)+30%GF	1
序号	产品名称	材 质	数量

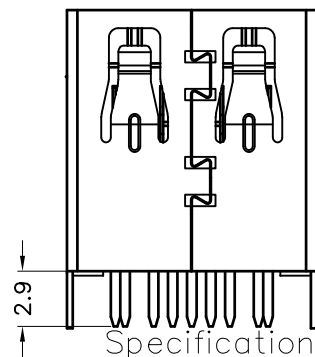

Specifications:

- 1.Current Rating:1.0A at 30V AC.
- 2.Withstanding Voltage:100V AC for one minute.
- 3.Insulation Resistance:100MΩ Min.
- 4.Contact Resistance: 30mΩ Max.
- 5.Mating Force: 3.57kgf Max.
- 6.Unmating Force:1.02kgf Min.
- 7.Operating Temperature: -40℃~+85℃.
- 8.Marked " "are important dimensions.

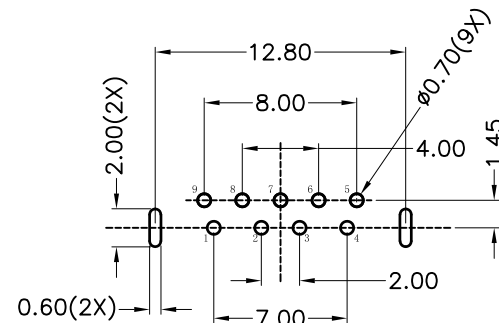

REFERENCE PCB LAYOUT
(TOLERANCE+±0.05)

Pin NUMBER	SIGNAL NAME	UNITS	SCALE	REV.	SHEET	HJ-Tech 东莞市皇捷通讯科技有限公司				
1	VBUS	mm	1:1	A0	1 OF 1	手机: 15015262131 手机: 13714786106				
2	D-		GENERAL TOLERANCE	DATE		TITLE:				
3	D+			2011-02-11						
4	GND			DR.		USB 3.0 AF 180度插板（无卷边直脚）13.7长				
5	StdA_SSRX-			ROSE						
6	StdA_SSRX+	0. ±0.30 0.0 ±0.25 0.00 ±0.20 0.* ±4° 0.0° ±2°		CHK.		MAT'L		FINISH		
7	GND_DRAIN			OWEN		SEE TABLE		SEE TABLE		
8	StdA_SSTX-			APPD.		DWG.NO.		PART NO.		SIZE
9	StdA_SSTX+			LUO YO		GU3-088-1L4		SEE TABLE		
Shell	Shield							A		A4