




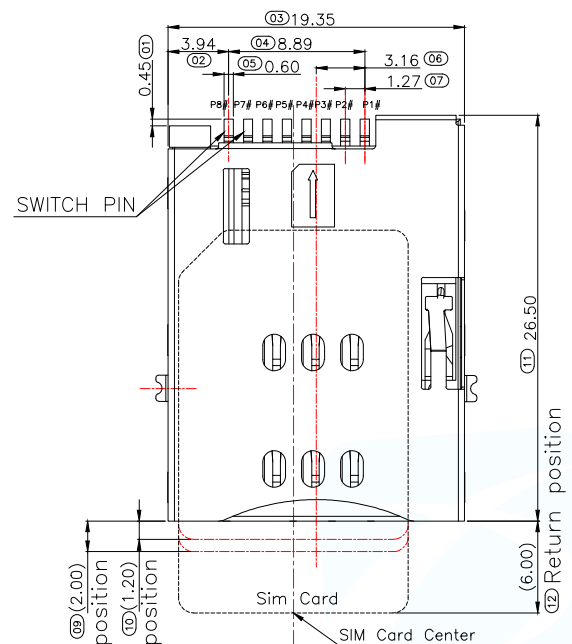



PIN NO.	DESCRIPTION
P1#	C1:VCC
P2#	C5:GND
P3#	C2:RST
P4#	C6:VPP
P5#	C3:CLK
P6#	C7:I/O
P7#	POL
P8#	DET



Preload status



Working status

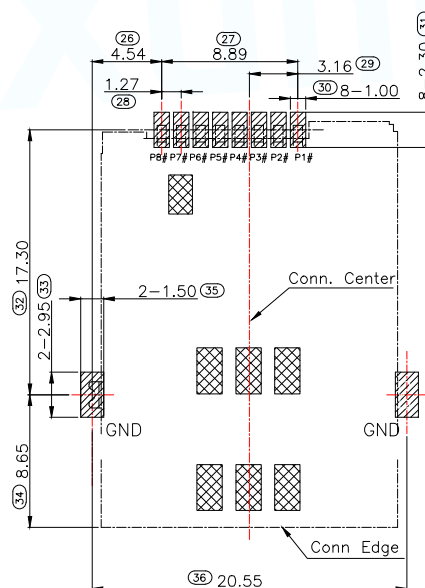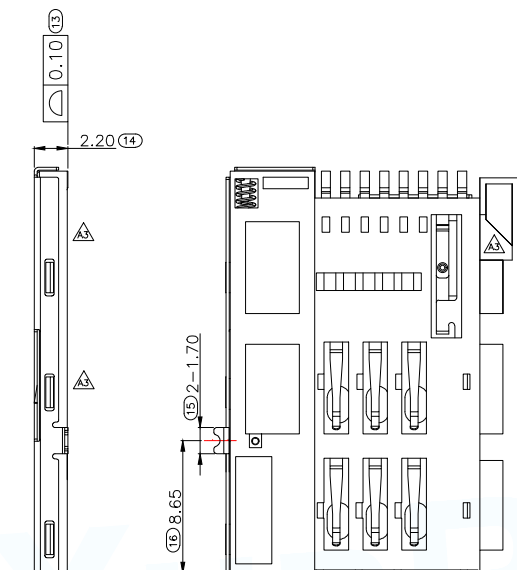RECOMMENDED PCB LAYOUT(TOP VIEW)
GENERAL TOLERANCES:±0.05

- SOLDER AREA
- NONE CIRCUIT DIAGRAM AREA

NOTES:

1)MATERIAL:

HOUSING: LCP UL 94V-0

CONTACT: C5210R-H,T=0.15

SHELL: SUS304,T=0.15

MYLAR: POLYESTER



2)FINISH :

CONTACT:GOLD FLASH PLATED ON CONTACT AREA;
GOLD FLASH PLATING ON SOLDER TAILS, WITH
ENTIRE CONTACT UNDERPLATED


50u"Min,NICKEL

SHELL: 50u"Min. NICKEL UNDERPLATED OVERALL ,
GOLD FLASH PLATED ON SOLDER TAILS


3)INFRARED REFLOW SOLDERING: 10sec. Min. at 260±10

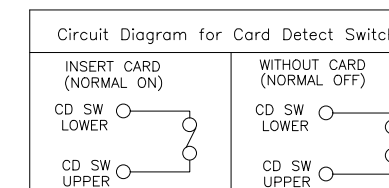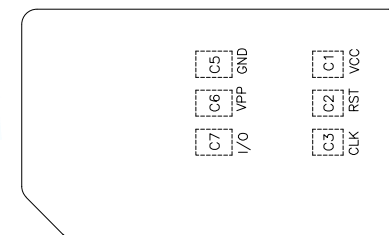

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:2.3H 6+2Pin PUSH PUSH CARD
			PAR SIM-130-ARP8H23
DECIMALS:	ANGLES:		DWN
.X:±0.30	X":±2°		CHKD
.XX:±0.20	X.X":±1°		APVD
.XXX:±0.10			SCALE:1:1
Website address		SIZE:A4	UNIT:MM
		SHEET:1F1	REV:A

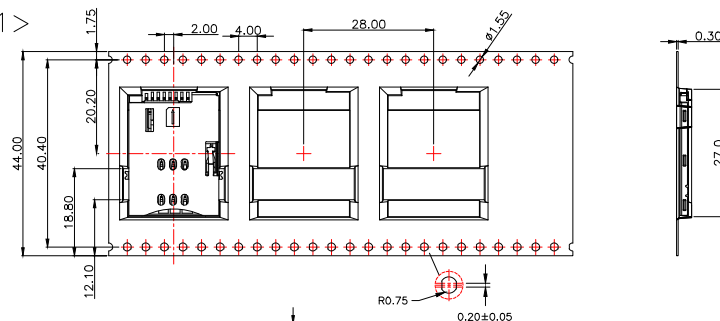

QTY/REEL	REEL/CARTON	QTY/CARTON
550	6	3300

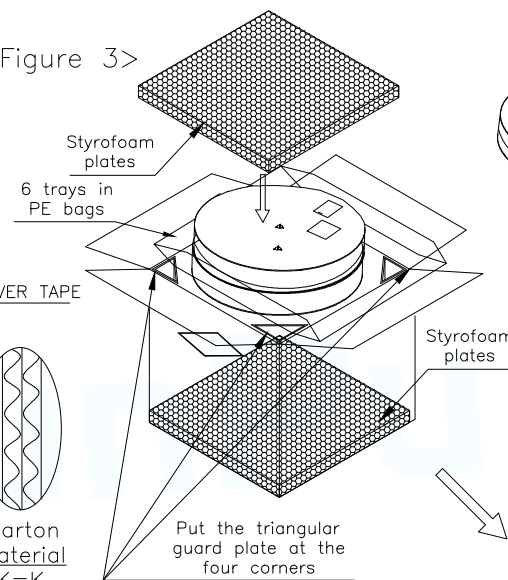


Carton material
K=K

Put the triangular guard plate at the four corners

desiccant

6 Reel+2 PCS

Waterproof
bag

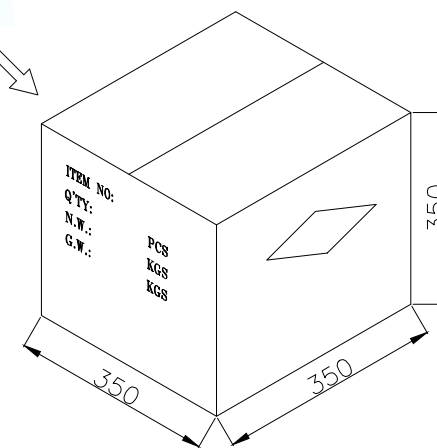

- 1.<Figure 1>Place the product in the Carrier tape according to the instructions, and place 1PCS of the product in each cavity.
When the Carrier tape is wound, 20PCS needs to be reserved for the front end and the tail end respectively.
- 2.The cover tape covers the front end of the carrier tape beyond 200 mmMIN, and the back end needs to be extended
Leave 300mmMIN, and both ends are fastened with masking tape.
- 3.After the packaging machine is wrapped, tape is applied to the aliquots of the Reel to prevent the REEL from opening.
Label 1PCS per Reel, as <Figure 2>shown
- 4.The number of packages is shown in <TABLE 1>
- 5.Packed into boxes, see as <Figure 3>shown
Put the styrofoam board at the bottom of the box, and then put the PE bag (6 Reel plates, 2PCS desiccant) into it
In the box, a triangular guard plate is placed at each of the four corners, and a styrofoam board is placed on the top layer.
- 6.Seal the box and paste the shipping label in the middle of the side of the sealed carton.



东莞市讯普电子科技有限公司
DongGuan XunPu Electronics Co,Ltd



SIZE:A4	SHEET:1F1	REV:A
---------	-----------	-------

Website address:

SIZE:A4	SHEET:1F1
---------	-----------

SHEET:1F1

REV:A