
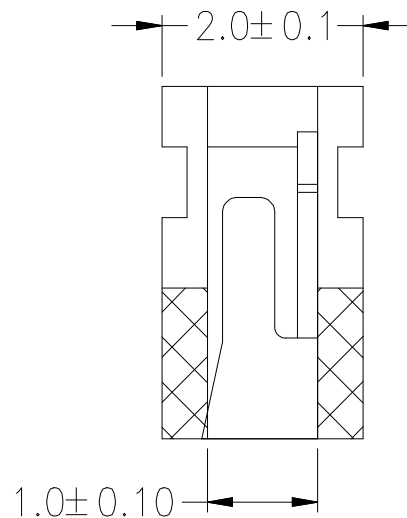


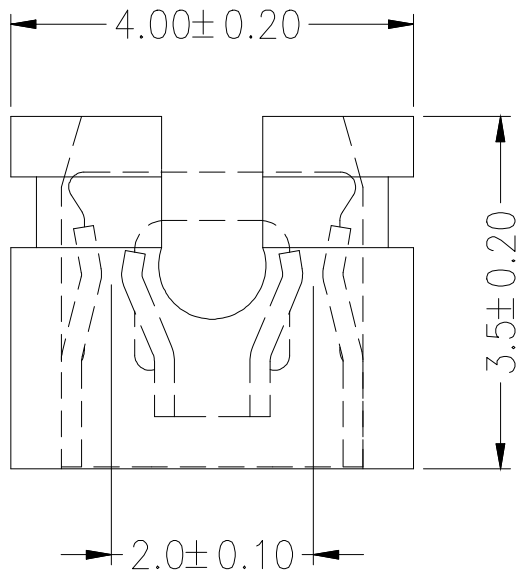

SPECIFICATIONS

Rated Current:1.5AMP

Contact Resistance:20mΩMax

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩMin

Operation Temperature:-40°C to +105°C

Contact Material: Brass

Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PBT

Max.Processing Temp: 180°C for 30-60 seconds
(230°C for 10 seconds)

Ordering Information

HC-JP 200 - 1 - ** - ** - * - **

No.of Rows
1=Single Type

Length
(mm)
35=3.5mm
50=5.0mm

Type
OP=Open
CL=Close

Color
B=Black
L=Blue
R=Red
W=White
Y=Yellow
V=Green

Contact Plating
G0:Gold Flash
G1:1u" Gold
G2:3u" Gold
G3:5u" Gold
G4:10u" Gold
G5:15u" Gold
G6:30u" Gold
S0:Gold Flash/Tin
S1:Tin

			GENE RL TOL E RANCE	制 图 DRAWING	 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
			DIM TOL	审 核 CHECK				
			X.X ±0.30	批 准 APPROVAL	产品名称 TITLE	2.00 跳线帽 (开口)	版本 REV.	A
1	初版发行		X.XX ±0.20	比 例 SCALE	产品料号 PART NO.	HC-JP200-1-35-0P-B-XX	单 位 UNITS	mm
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	X.XXX ±0.10	投 影 Projection	材 料 MATERIAL		页 次 SHEET	1/1
			Angle ±3.0°					