


|                                       |         |         |                                                                                                                                           |                             |                     |             |                                                                                       |
|---------------------------------------|---------|---------|-------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|---------------------|-------------|---------------------------------------------------------------------------------------|
| BOM                                   |         |         |                                                                                                                                           |                             |                     |             |                                                                                       |
| 序号                                    | 名称      | 用量      | 品名规格                                                                                                                                      |                             |                     |             |                                                                                       |
| 1                                     | 外壳      | 1       | Typec侧贴 SUS304 T=0.30mm Ni 50u"Min                                                                                                        |                             |                     |             |                                                                                       |
| 2                                     | Molding | 1       | Typec侧贴 SMT 16PIN Molding C7025 T=0.15mm Au 1u";<br>SUS301 T=0.15mm;LCP黑色 H=7.2 半成品                                                       |                             |                     |             |                                                                                       |
| UNLESS OTHERWISE SPECIFIED TOLERANCES |         |         |  东莞市汉博电子科技有限公司<br>DONGGUAN HANBO TECHNOLOGY CO., LTD |                             |                     |             |                                                                                       |
| DECIMALS:                             |         | ANGLES: | TITLE                                                                                                                                     | USB TYPE CF 16PIN 侧贴 CH=7.2 |                     |             |                                                                                       |
| X                                     | ±0.30   | X ±1°   | DWN                                                                                                                                       | xiong                       | PART NO. MC-711-H72 |             |                                                                                       |
| X.X                                   | ±0.20   | X.X ±1° | CHKD                                                                                                                                      | lee                         | SCALE:1:1           | UNIT: mm    |  |
| X.XX                                  | ±0.10   |         | APVD                                                                                                                                      | wang                        | SIZE: A4            | SHEET:1OF 1 | REV: A4                                                                               |
| CUSTOMER COPY                         |         |         |                                                                                                                                           |                             |                     |             |                                                                                       |



A

B

- C

D

1. 端子：接触点

2. 外壳：镀镍80u"MIN

七、工作温度： $-55^{\circ}\text{C}\sim+85^{\circ}\text{C}$

八、盐雾测试：通过48H在浓度为 $5 \pm 1\%$ 盐水的盐雾测试无生锈现象




---

BOM

| 序号                                       | 名称      | 用量       | 品名规格                                                                                                                                                  |       |                     |             |                                                                                       |
|------------------------------------------|---------|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------|-------|---------------------|-------------|---------------------------------------------------------------------------------------|
| 1                                        | 外壳      | 1        | Typec侧贴 SUS304 T=0.30mm Ni 50u"Min                                                                                                                    |       |                     |             |                                                                                       |
| 2                                        | Molding | 1        | Typec侧贴 SMT 16PIN Molding C7025 T=0.15mm Au 1u";<br>SUS301 T=0.15mm;LCP黑色 H=7.2 半成品                                                                   |       |                     |             |                                                                                       |
| UNLESS OTHERWISE<br>SPECIFIED TOLERANCES |         |          | <div> 东莞市汉博电子科技有限公司<br/>DONGGUAN HANBO TECHNOLOGY CO., LTD</div> |       |                     |             |                                                                                       |
| DECIMALS:                                |         | ANGLES:  | TITLE USB TYPE CF 16PIN 侧贴 CH=7.2                                                                                                                     |       |                     |             |                                                                                       |
| X                                        | :±0.30  | X :±2°   | DWN                                                                                                                                                   | xiong | PART NO. MC-711-H72 |             |                                                                                       |
| X.X                                      | :±0.20  | X.X :±1° | CHKD                                                                                                                                                  | lee   | SCALE:1:1           | UNIT: mm    |  |
| X.XX                                     | :±0.10  |          | APVD                                                                                                                                                  | wang  | SIZE: A4            | SHEET:10F 1 | REV: A4                                                                               |
| CUSTOMER COPY                            |         |          |                                                                                                                                                       |       |                     |             |                                                                                       |




| REV. | ECN NO OR DESCRIPTION | REVISED | DATE |
|------|-----------------------|---------|------|
|      |                       |         |      |
|      |                       |         |      |

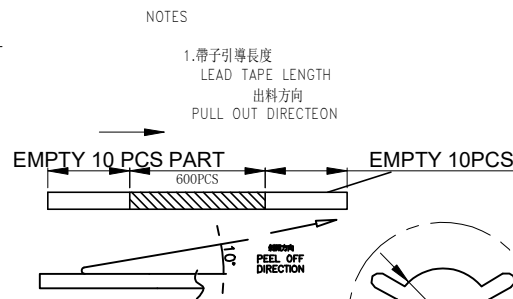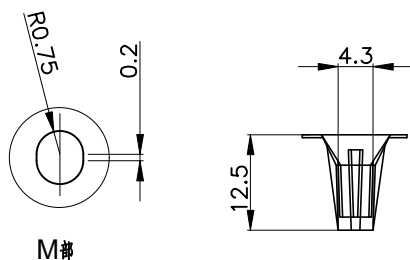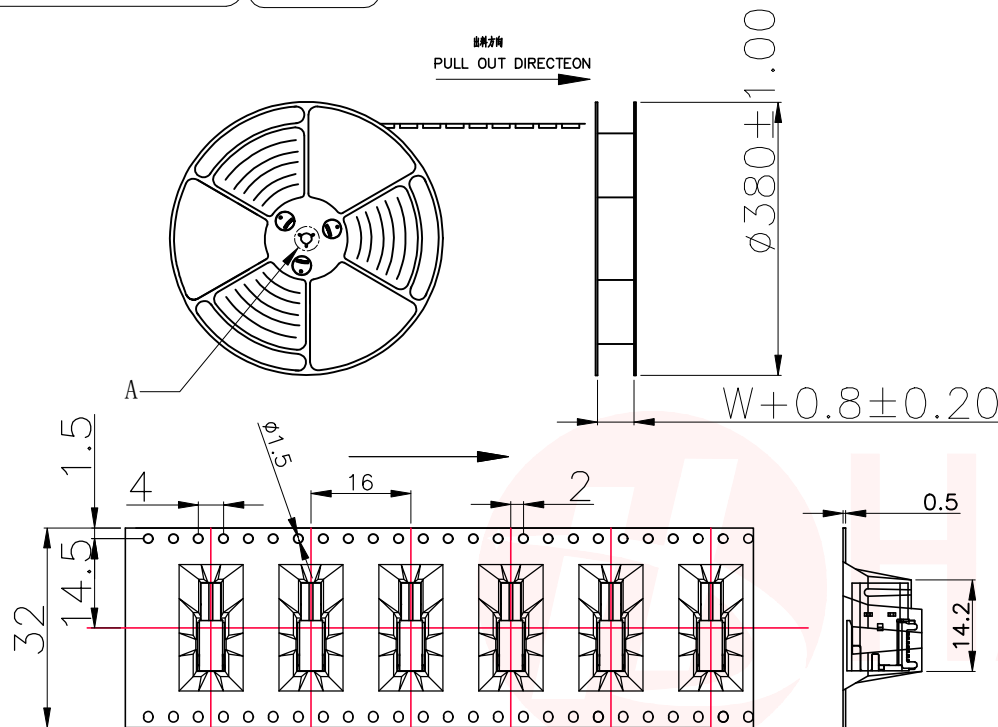

2. 上帶 剝力力為: 0.1~1.3N(10.2gf~130gf)  
PEELING OFF FORCE OF TOP TAPE:0.1~1.3N(10.2gf~130gf)  
出貨'運輸過程中一定注意:  
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT:  
卷帶在運輸過程中不能散開  
PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION

DETAIL:A  
10:1

at small positioning hole of the carrier tape side).  
標籤黏貼處 (朝捲裝包材的小定位孔一側)  
Location of label sticking (label)

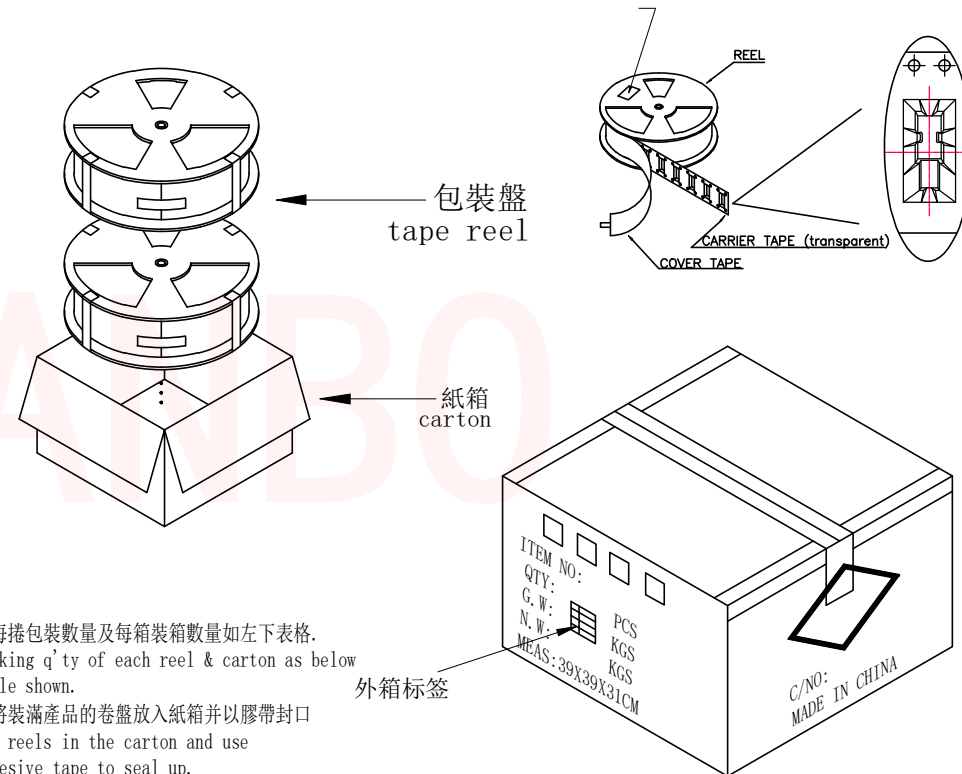

NOTE:  
1. 每捲包裝數量及每箱裝箱數量如左下表格.  
Packing q'ty of each reel & carton as below table shown.  
2. 將裝滿產品的卷盤放入紙箱並以膠帶封口  
Put reels in the carton and use adhesive tape to seal up.

|                                       |                         |                                                     |
|---------------------------------------|-------------------------|-----------------------------------------------------|
| 卷帶                                    | 規格: $\phi 380\text{mm}$ | 包裝數量: 400PCS                                        |
| 紙箱                                    | 規格: 390mmX390mmX310mm   | 包裝數量: 8盤 / 3200PCS                                  |
| UNLESS OTHERWISE SPECIFIED TOLERANCES |                         | 东莞市汉博电子科技有限公司<br>DONGGUAN HANBO TECHNOLOGY CO., LTD |
| DECIMALS:                             | ANGLES:                 | TITLE                                               |
| X :±0.35                              | X :±2°                  | USB TYPE CF 16PIN 侧插SMT CH=7.2                      |
| X.X :±0.30                            | X.X :±1°                | DWN xiong                                           |
| X.XX :±0.25                           |                         | CHKD lee                                            |
|                                       |                         | APVD wang                                           |
| CUSTOMER COPY                         |                         |                                                     |