

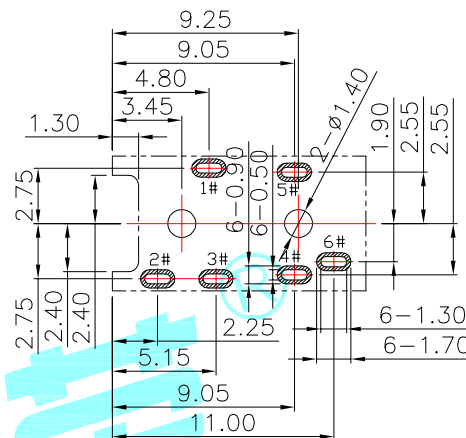

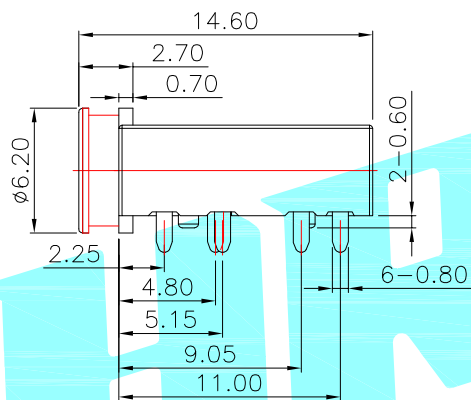
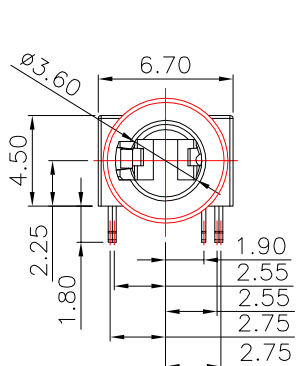


3D VIEW

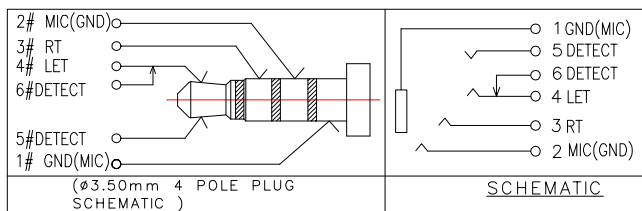

P.C.B. LAYOUT=1.00mm
TOP VIEW



- CONTACT CURRENT RATING: 1A.
- CONTACT RESISTANCE: 100 mΩ MAX.;
- INSULATION RESISTANCE: 100MΩ MIN.;
- DIELECTRIC WITHSTANDING: 500V AC MIN.;
- DURABILITY: 5,000 CYCLES MIN.;
- CONNECTOR MATING FORCES: 30N MAX.;
- CONNECTOR UNMATING FORCES: 3N MIN.;
- TERPROOF LEVEL: IPX7;

④	Waterproof ring	1	Silica gel	Black	
③	Other Terminal	5	Copper alloy	Ni/Au Plating	
②	Terminal 1#	1	SUS	Ni/Au Plating	
①	Housing	1	High temperature plastic	Black	
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING
APPROVALS		DATE		HRO 韩睿®	
DRAWN	LIUCAN	2023.3.3		ELECTRONICS CO.,LTD	
CHECKED				TITLE:	PHONE JACKS
APPROVALS				PART NO.	PJ-623
TOLERANCES ARE	30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
	10~30	±0.20		DRAWING NO.	PROJ: ①
	5~10	±0.15			
~ 5	±0.10	±2°			SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			