

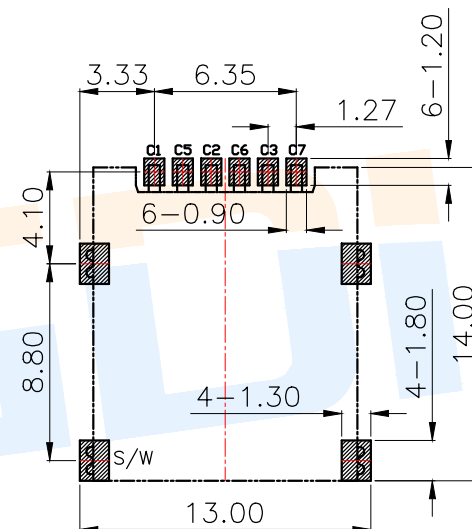
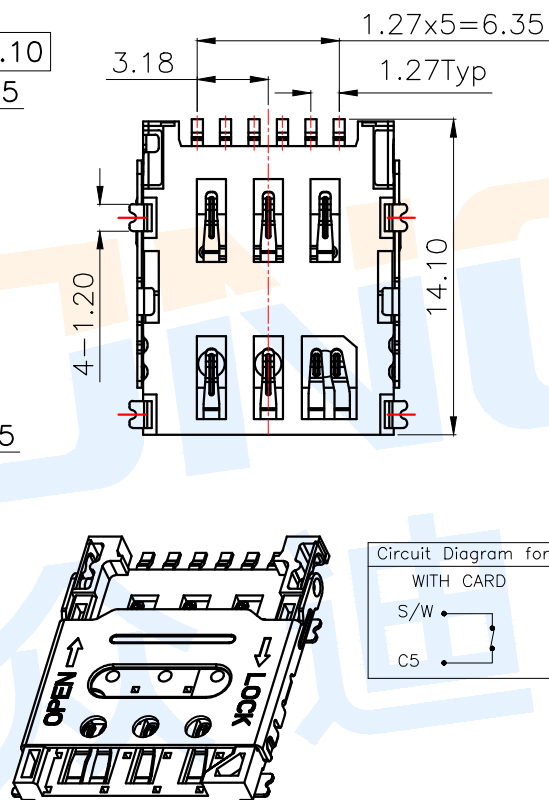
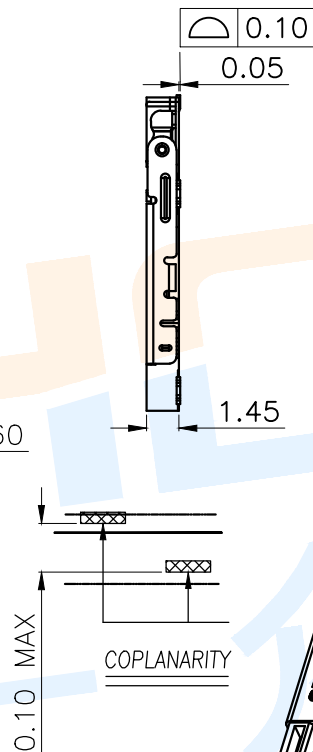


RoHS


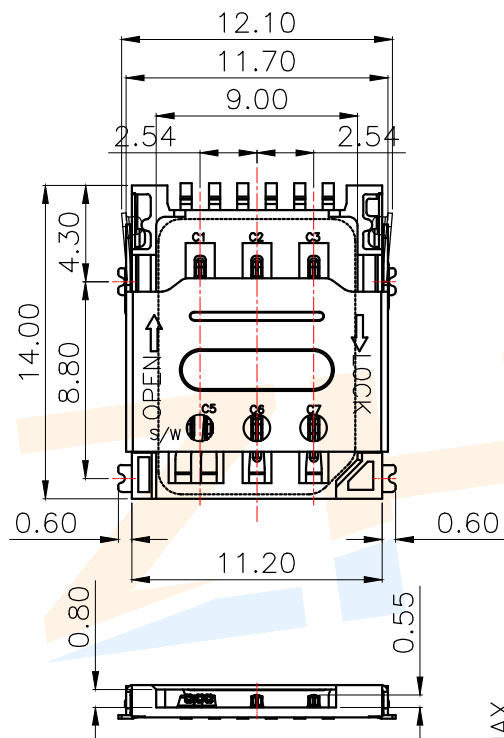


RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05
SMT SOLDER AREA

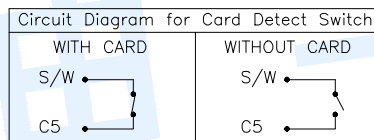


Specifications/技术规格:

- 1.Current rating/额定电流: 1.0A
- 2.Voltage rating/额定电压: 50V DC
- 3.Insulation Resistance/绝缘电阻: 100M Ω Min
- 4.Dielectric Withstanding/ 耐电压: 500V AC/minute
- 5.Contact Resistance/ 接触电阻: 100m Ω Max
- 6.Durability/ 耐久性: 5,000 Insertions
- 7.Operating Temperature/ 工作温度: -25 $^{\circ}$ C to +85 $^{\circ}$ C

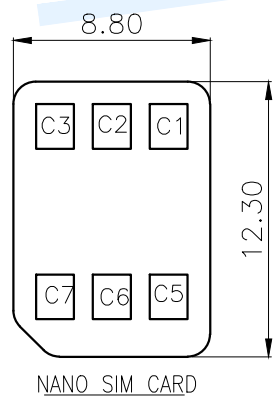

STEP 1 INSERT Micro-SIM CARD



STEP 2 PUSH THE SHELL

STEP 3 FINISH

SIM CARD	
PIN#	Name
C1	VCC供电电压
C2	RST重置
C3	CLK时钟
C5	GND接地
C6	VPP程序电压
C7	I/O输入输出
S/W	Switch Pin

①	Terminal		6	Phosphor bronze	Au plated
②	Contact		7	Phosphor bronze	Au plated
③	Cover		1	SUS	
④	Base		1	LCP	Black
NO.	Name	Number	Qty	Materil	Remarks

ZHONGDI 众迪 Zhongdi Electronic Technology Co., Ltd

design	date	name	NANO SIM CARD CONNECTOR
Review	date	model	NANO-SIM-0502A-P
Approved	date		

Drawing number: A4

modify Review Approved Tolerance not specified Proportion 1:1 unit mm gage number