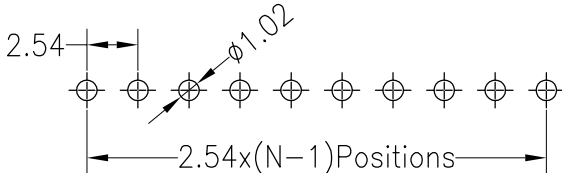
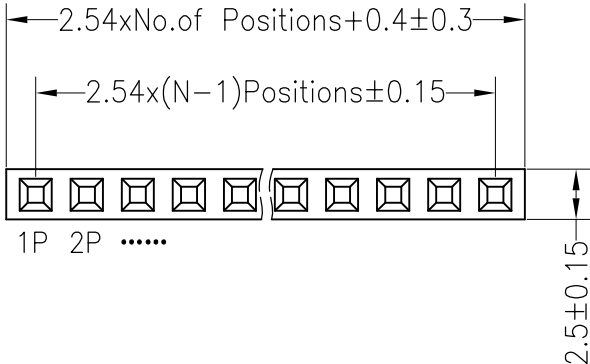
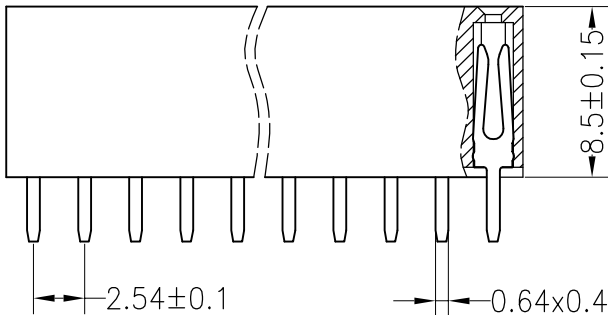



1		2		3		4		5		6		7		8		9	
RoHS		Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)    															
SPECIFICATIONS																	
Rated Current:3.0AMP																	
Contact Resistance:20mΩ Max																	
Withstand Voltage:1000V AC/DC																	
Insulation Resistance:1000MΩ Min																	
Operation Temperature:−40°c to +105°c																	
Contact Material:Brass																	
Contact Plating:Au Over Ni																	
Insulator Material:Polyester(UL94V−0)																	
Standard: PA6T																	
Max.Processing Temp: 230°C for 30−60 seconds																	
(260°C for 10 seconds)																	

RoHS

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:−40°c to +105°c

Contact Material:Brass





Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V−0)

Standard: PA6T

Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

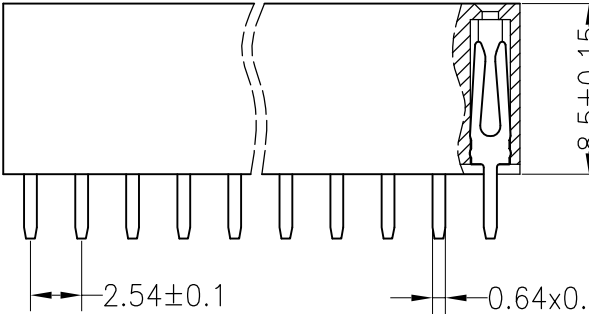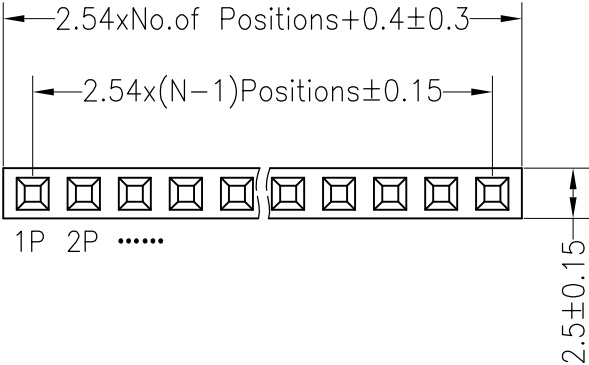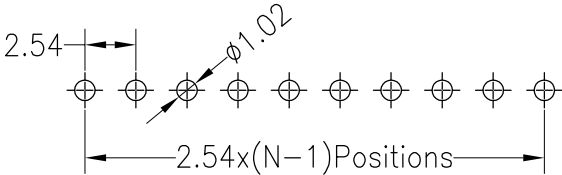

深圳市连盛精密连接器有限公司

PART NO.

1020300098

TITLE:

2.54FH H8.5mm 1x2pin 180° W2.5mm