



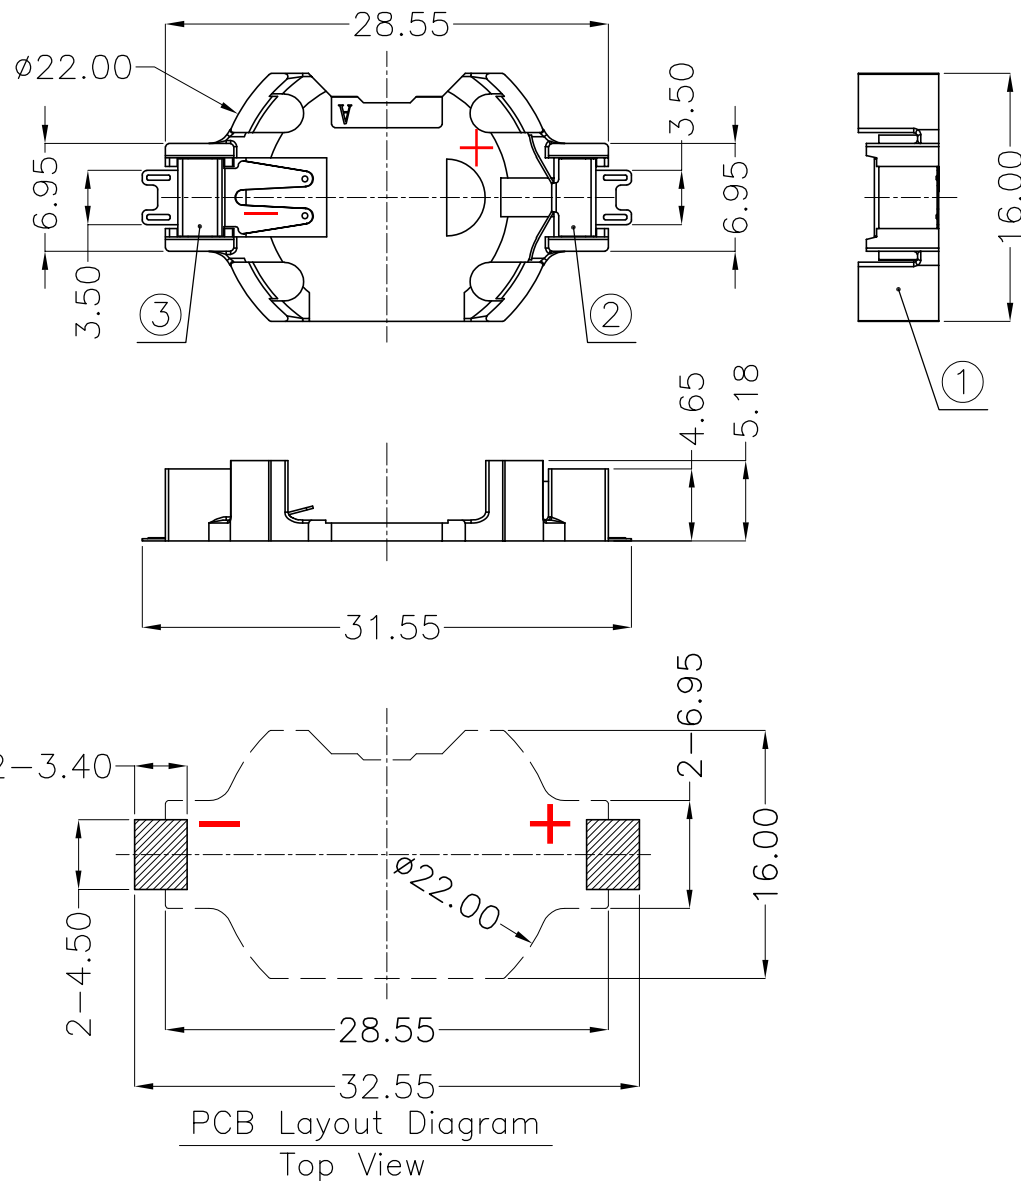


H. WANG

UNLESS OTHERWISE SPECIFIED TOLERANCES		 www.meiyangdz.com				
DECIMALS: ANGLES: X .:±0.30 X :±1° X.X :±0.25 X.X :±0.5° X.XX :±0.20 X.XXX :±0.10		DSND	WangHeng	DATE	2023-11-14	TITLE: BS-2032-6-2 Sn SMT PPA白色 卷装
		CHKD	ZhouRuicai	DATE	2023-11-14	
		APVD	XueShunyong	DATE	2023-11-14	PART NO.: BS-06-B2CK005-R
WEIGHT:		SCALE: 2:1	SIZE: A4	VIEW: 		
SHEET 1 OF 2		UNIT: mm	REV.: A/0	OBJECT: MY	DRAW NO.:MY-CP-0222	

3	TERMINAL(-)	1	PHOSPHOR BRONZE, T=0.20mm	Sn Plating
2	TERMINAL(+)	1	PHOSPHOR BRONZE, T=0.20mm	Sn Plating
1	HOUSING	1	PPA	WHITE
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR



产品





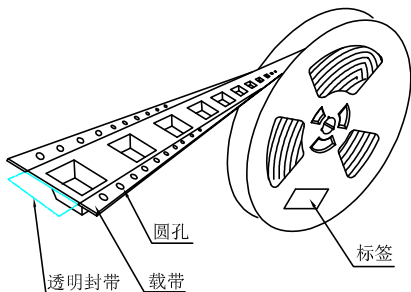


圆孔




透明封带

载带

标签

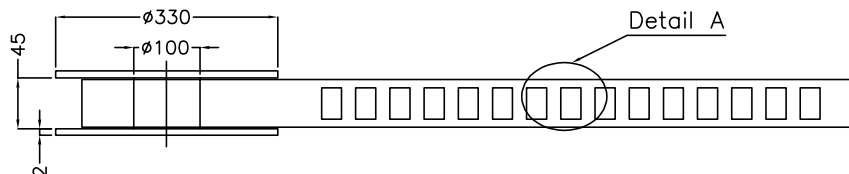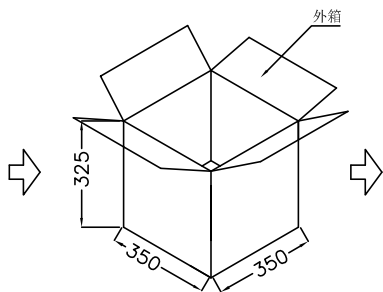

Detail A

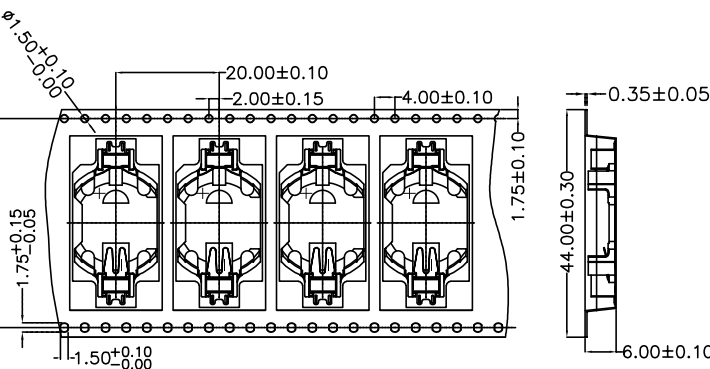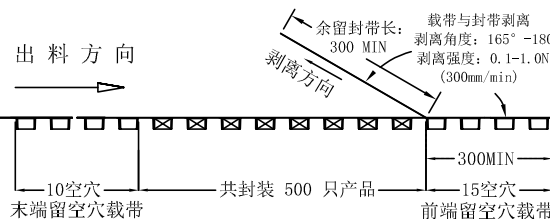

Detail A

工程部

2023-11-14

H. WANG

技术要求:

- 圆孔十个孔距离累计允许公差为 $\pm 0.2\text{mm}$
- 带长250mm内容许弯曲度1mm
- 材料厚度以在载带边缘测量为准
- 所有尺寸定义依循EIA-481-C系准则定义之
- 材料: 黑色PS T=0.35mm
- 所有卷轮为灰蓝挖空旋转型胶卷轮
- 整模成型长度: 10.5M,
- 非指明公差范围为: $\pm 0.1\text{mm}$; 超过250mm不计算累计误差
- 型腔外形凡未标明处倒角R为0.2~0.3; 拔模斜度未标注的为 3° 以下

包装信息:

- 每卷盘装产品 500 只, 卷盘外侧贴相关标签;
- 每 6 卷盘放在一个塑料袋中;
- 每外箱装6盘, 产品总数: 3000 只;
- 外箱上下用胶纸封成“工”字;
- 电池座包材BS-2032-6-2 SMT 卷装 (MY-6-2-01-R)

UNLESS OTHERWISE SPECIFIED TOLERANCES		MYOUNG 美阳 www.meiyangdz.com			
DECIMALS:	ANGLES:	DSND	WangHeng	DATE	2023-11-14
X : ±***	X : ±***	CHKD	ZhouRuicai	DATE	2023-11-14
X.X : ±***	X.X : ±***	APVD	XueShunyong	DATE	2023-11-14
X.XX : ±***	X.XX : ±***	WEIGHT:	SCALE: 3:1	SIZE: A4	VIEW:
X.XXX : ±***	X.XXX : ±***	SHEET 2 OF 2	UNIT: mm	REV.: A/0	OBJECT: MY
				TITLE: BS-2032-6-2 Sn SMT PPA白色 卷装	
				PART NO.: BS-06-B2CK005-R	
				DRAW NO.: MY-BD-0003	