

Operation: E-SIM SOCKETS & 掀盖式(Hinge) E-SIM 识别卡座



ITEM NO.: SEM-012 (Consumer Electronics)

(L7.1×W6.76×H1.75mm & E-SIM Sockets)

MEMORY-CARD-SOCKETS



Technical parameter

表面贴装 SMT

侧向操作 LATERAL

精密部品 NICETY



可靠 STABILIZE

適合環保 RoHS

PROJECT		LEVEL	A[better product]	B[average product]
		Contact Rating	0.5A, 24V DC	
Electrical Properties	Initial Contact Resistance		50mΩ max.	80mΩ max.
	Insulation Resistance		100MΩ min.500V DC	
	Withstand Voltage		500V AC for 1 minute	350 V AC for 1 minut
Durable Performance	There No Load		6,000 Cycles	4,500 Cycles
	Rated Load		4,500 Cycles	3,000 Cycles
Storage temp.			-35℃~+75℃(Operating Temp:)	


Page1

Unit:mm

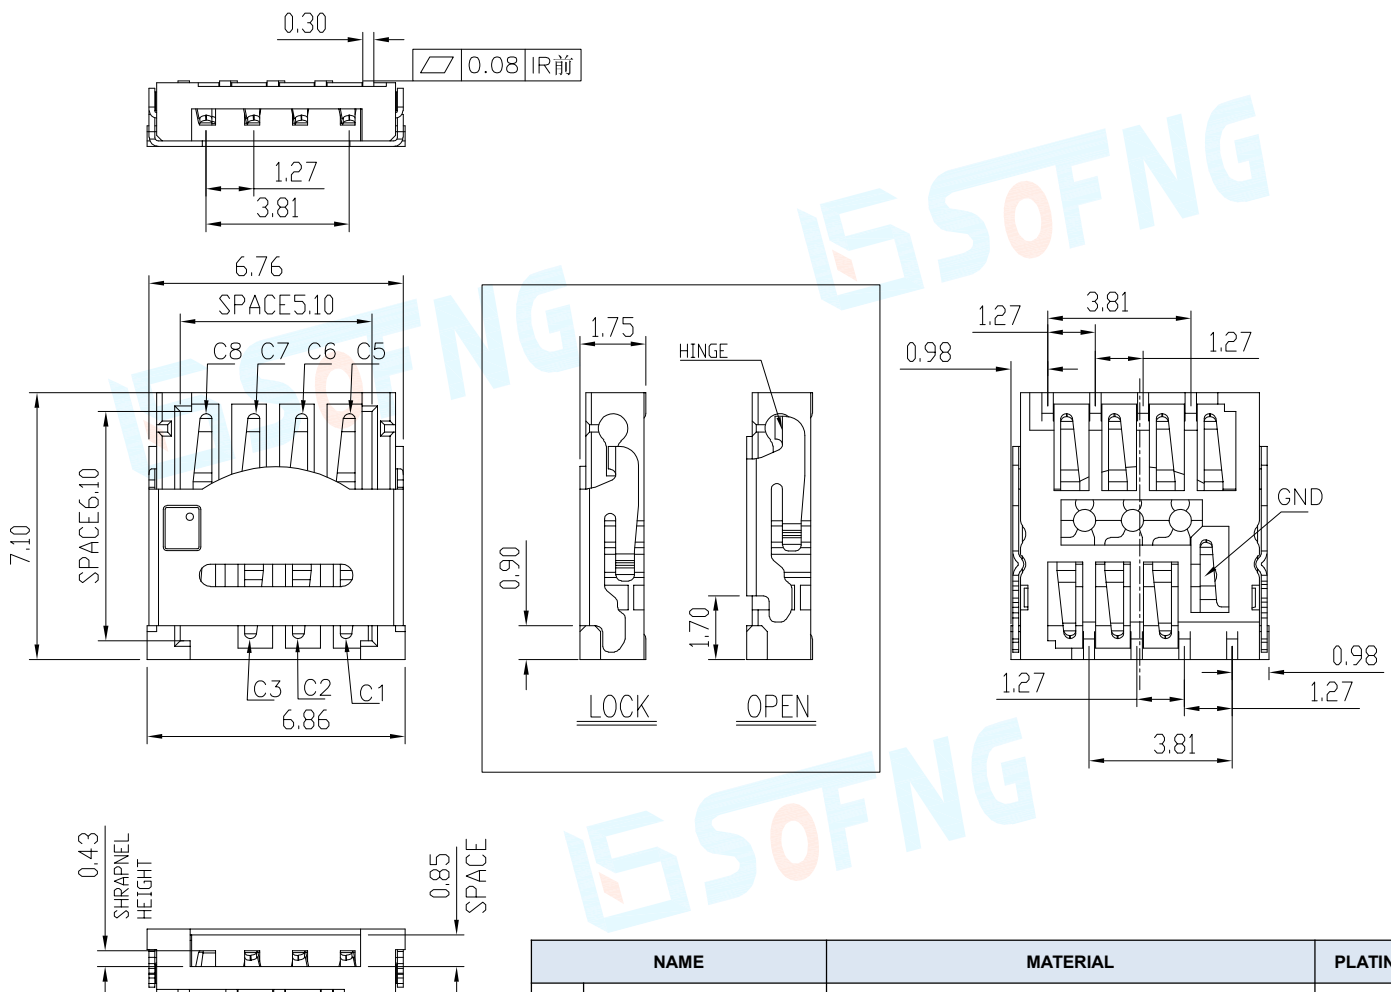

NAME		MATERIAL	PLATING
①	上盖 Cover	SUS304-H(t=0.12mm)不锈钢【GND 焊点镀金 1u"】	AU/Ni
②	接触端子 Terminal	C5210-EH (t=0.15mm)磷铜【镍基 Ni50u" 镀金 2u"】	G/F
③	基座 INSERT MOLDING	LCP 耐热塑胶 (UL94V-0) BLACK	SET

Operating Force	Insertion	10N MAX. (1N.=100gram-force)	Solder-ability (Max.)	
	Withdrawal	10N. MIN	IR Reflow:255°C, 5sec.	Manual :350°C, 3sec.

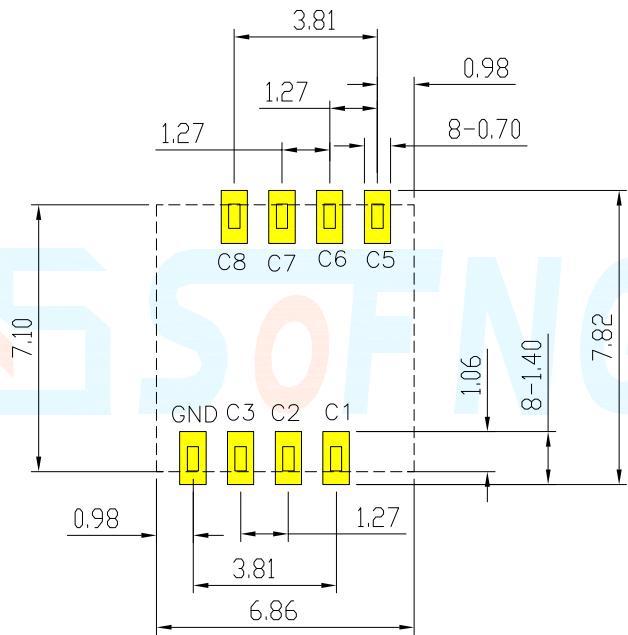




DECIMALS	ANGLES
.X :±0.20	X.° :±1.5°
.XX :±0.10	X.X° :±1.0°
.XXX :±0.05	.XXX° :±0.5°

Pin definition


SIM CARD

Pin No.	Description
C ①	VSS
C ②	NULL
C ③	I/O
C ④	NULL
C ⑤	NULL
C ⑥	CLK
C ⑦	RST
C ⑧	VDD


E-SIM

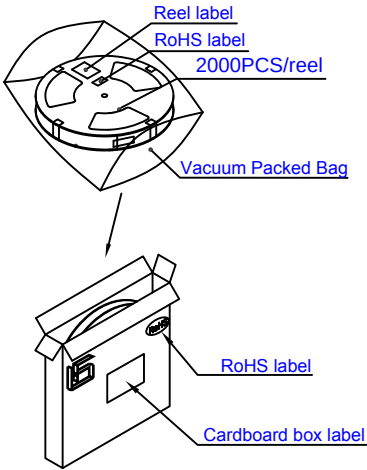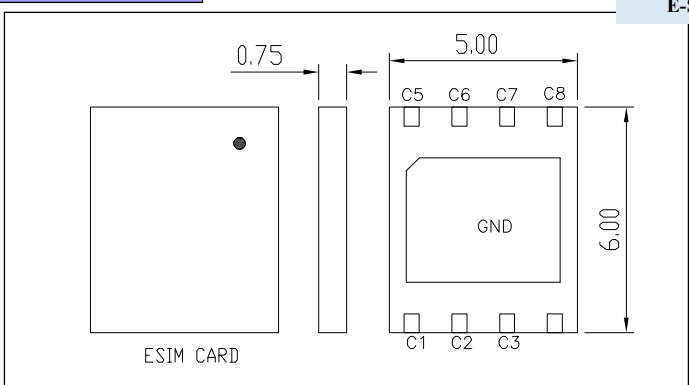

STEP1: INSERT ESIM CARD



STEP2: PUSH THE SHELL



STEP3: FINISH

注記 NOTICE

1. 碩方公司擁有最終解釋權; The SOFNG company reserves the right of final interpretation;
2. 文件禁止外洩、轉載; Leaked and reproduced prohibited;
3. 未經授權修改無效。Modify is invalid.