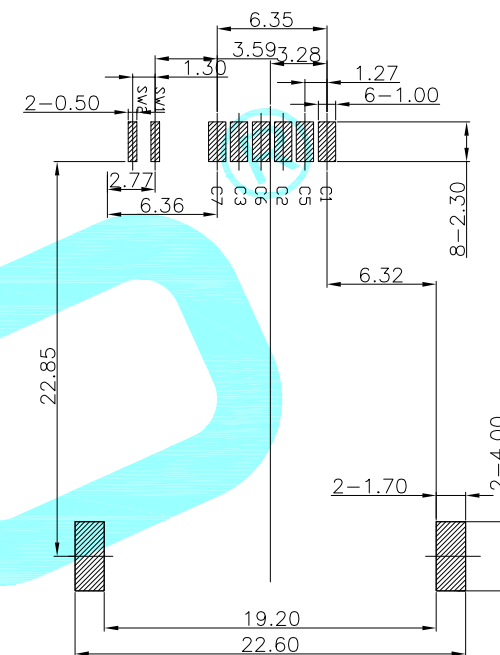
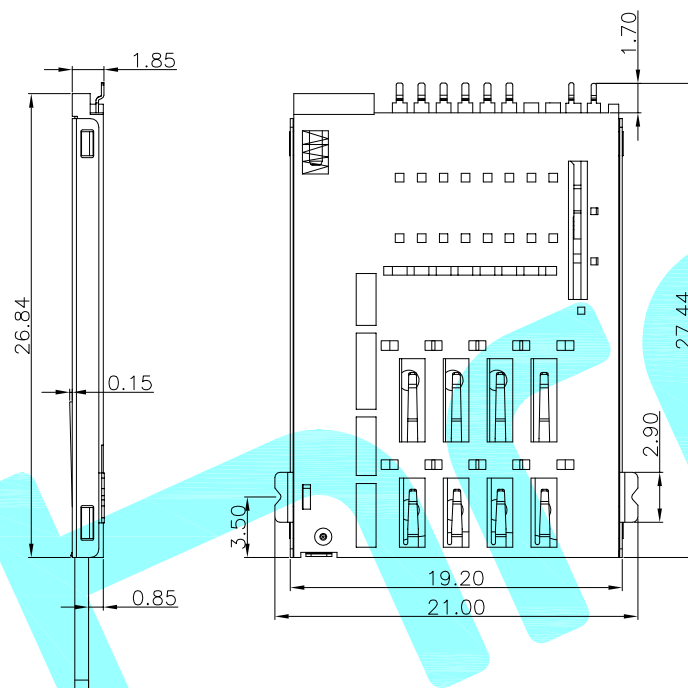



TOLERANCE: ± 0.05

INSULATION RESISTANCE: 500M min. AT DC 500V DC
WITHSTANDING VOLTAGE: 250V ACrms FOR 1 MINUTE
CONTACT RESISTANCE: 100M max. AT 10MA/20mV max
CURRENT RATING: 0.5A
VOLTAGE RATING: 5.0 vrms
OPERATING TEMP. RANGE: -55 C +85 C
MATING CYCLES: 5000 INSERTIONS

INSULATOR: H-TEMPERATURE PLASTIC,UL 94V-0,
COLOR"BLACK
TERMINAL: COPPER ALLOY,T=0.15mm
SHELL: STAINLESS STELL,T=0.15mm

TERMINAL:50u" min NICKEL UNDERPLATED ON ALLOVER,GOLD PLATING
ON CONTACT ARER, 80u"min TIN ON SOLDER TAIL.
SHELL:50u" NICKEL UNDERPLATED ON ALLOVER, GOLD FLASH ON SOLDER
LATCH

SIM pin assignment	
PIN#	Name
C1	VCC
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	VPP
C7	I/O
C8	Reserved

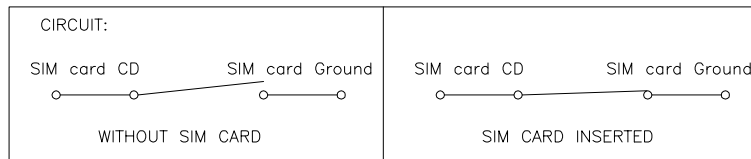

APPROVALS			DATE					
DRAWN		LIUCAN	2023.6.13					
CHECKED					TITLE:		SIM	
APPROVALS					PART NO.		SIM-17A	
TOLERANCES ARE	30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ:		
	10~30	±0.25						
	5~10	±0.20						
	~ 5	±0.15						
			±2'	DRAWING NO.	_____	SHEET 1 OF		