
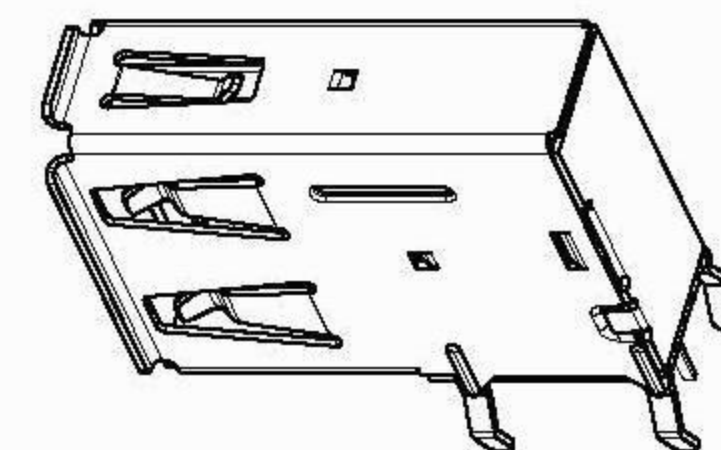
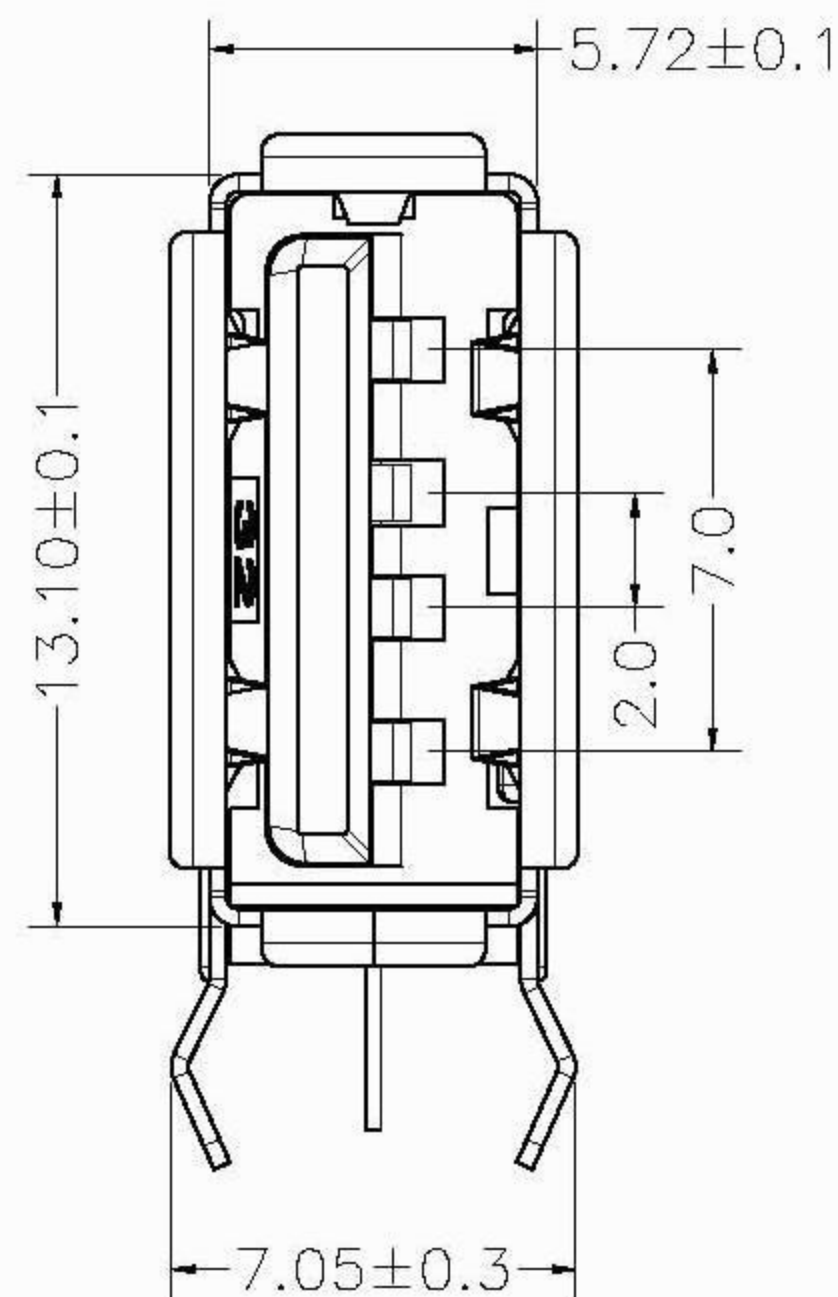


REV.	DESCRIPTION	DATE
A	RELEASE	2011.2.18

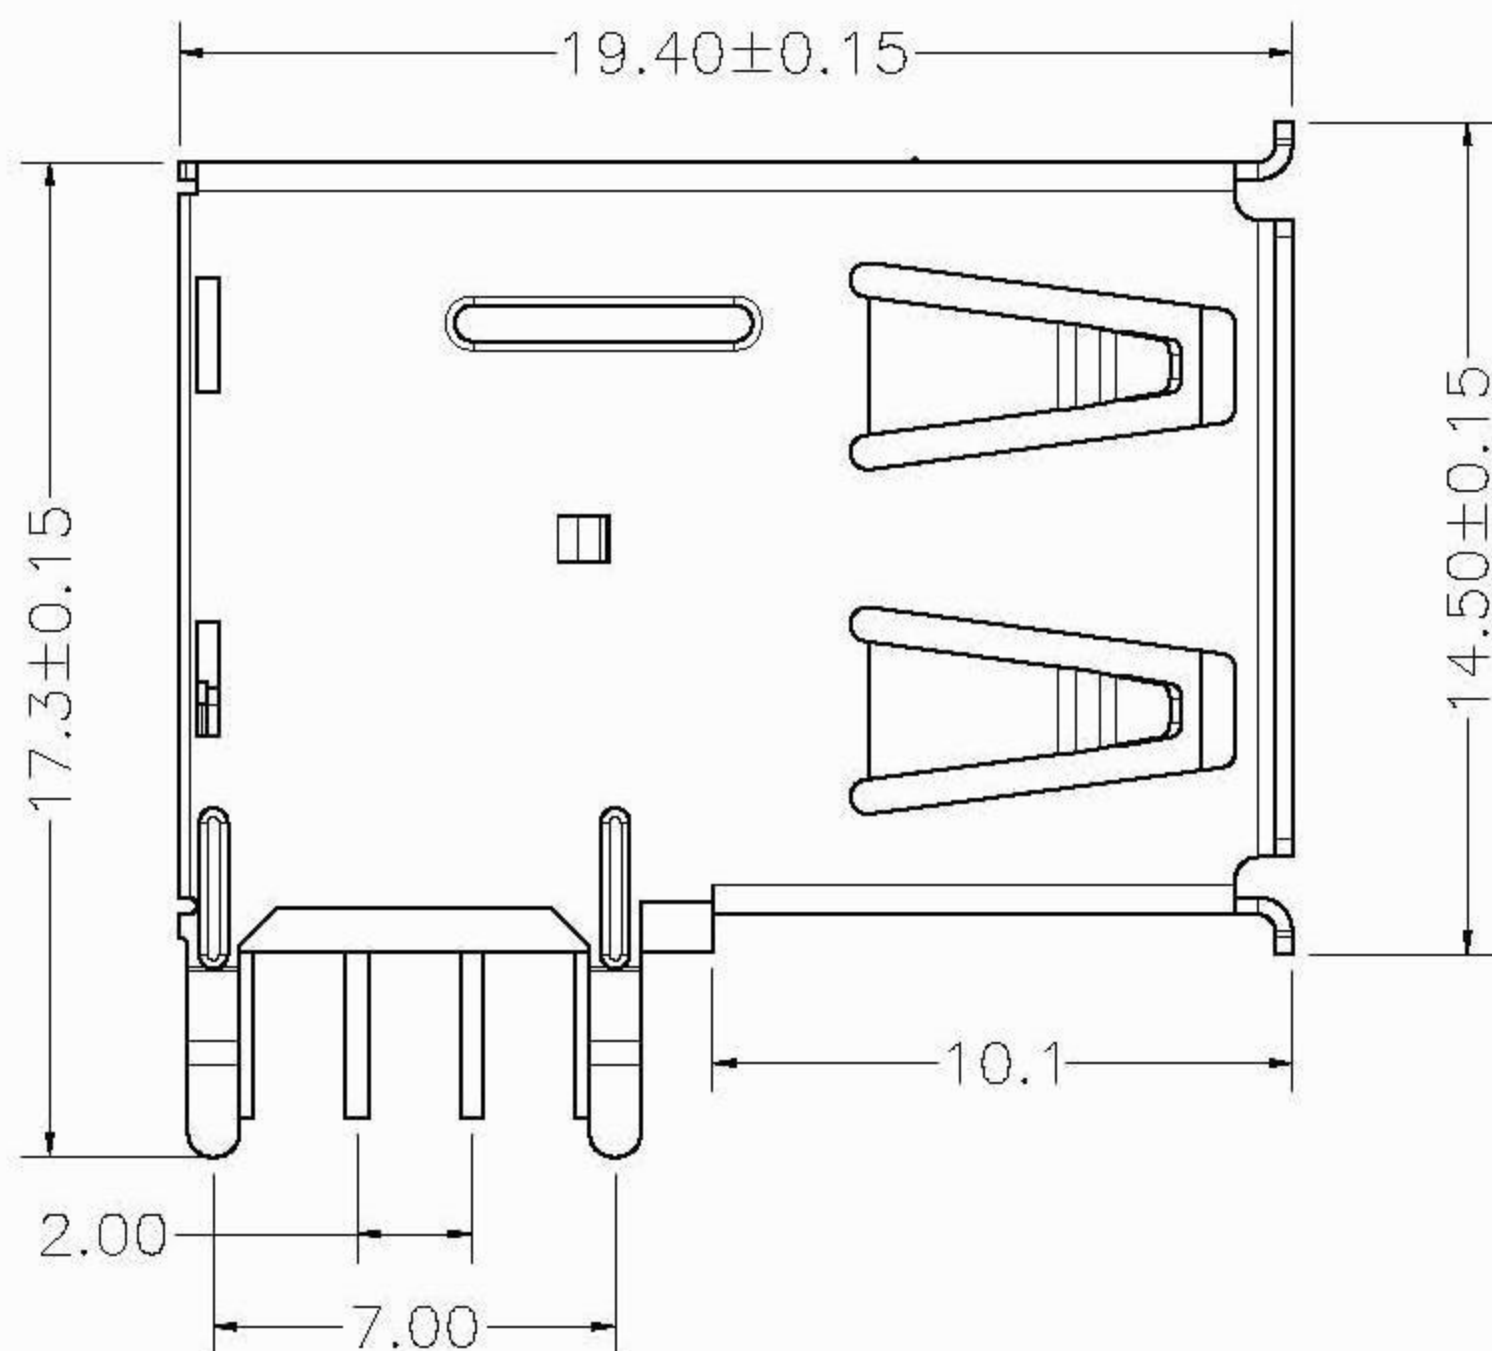

特性: Specifications:

电气: Electrical:

接触阻抗: Contact Resistance
30 milliohms MAX

耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level



绝缘阻抗: Insulation Resistance:
1000 MEGA ohms MIN

材料: Material

1. 塑料: PBT UL 94V-0
2. 端子: Contact Copper Alloy C2680H
3. 铜壳/铁壳: Shell: Copper Alloy

电镀: Finish

1. 端子: Contact: Plated Gold in Mating Area
Tin On Solder Tails
接触点镀金。脚镀锡
2. 铜壳/铁壳: Shell
Nickel plating 镀镍

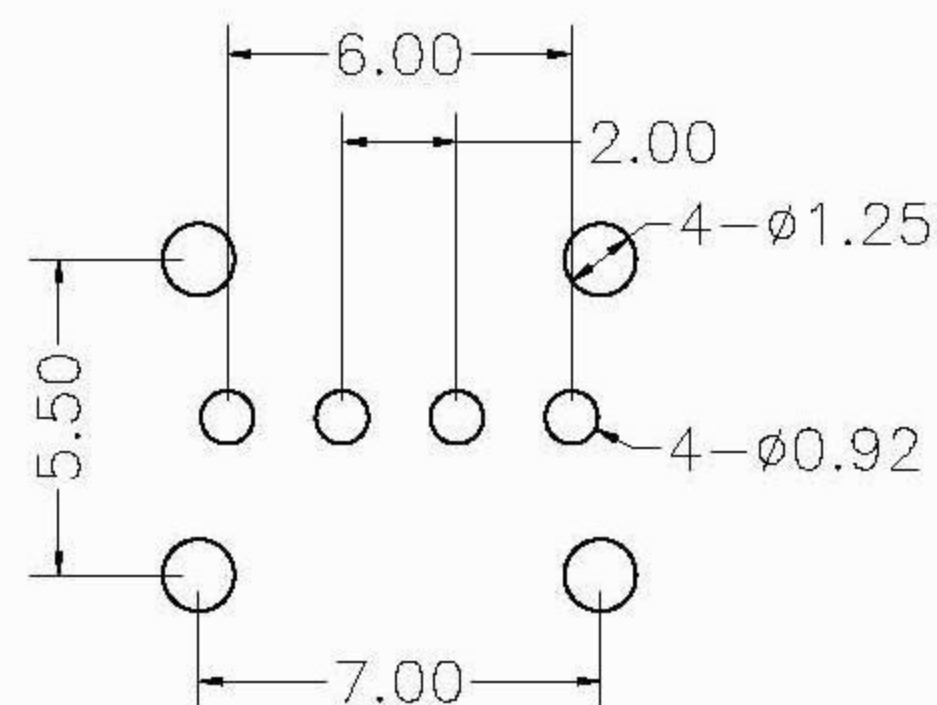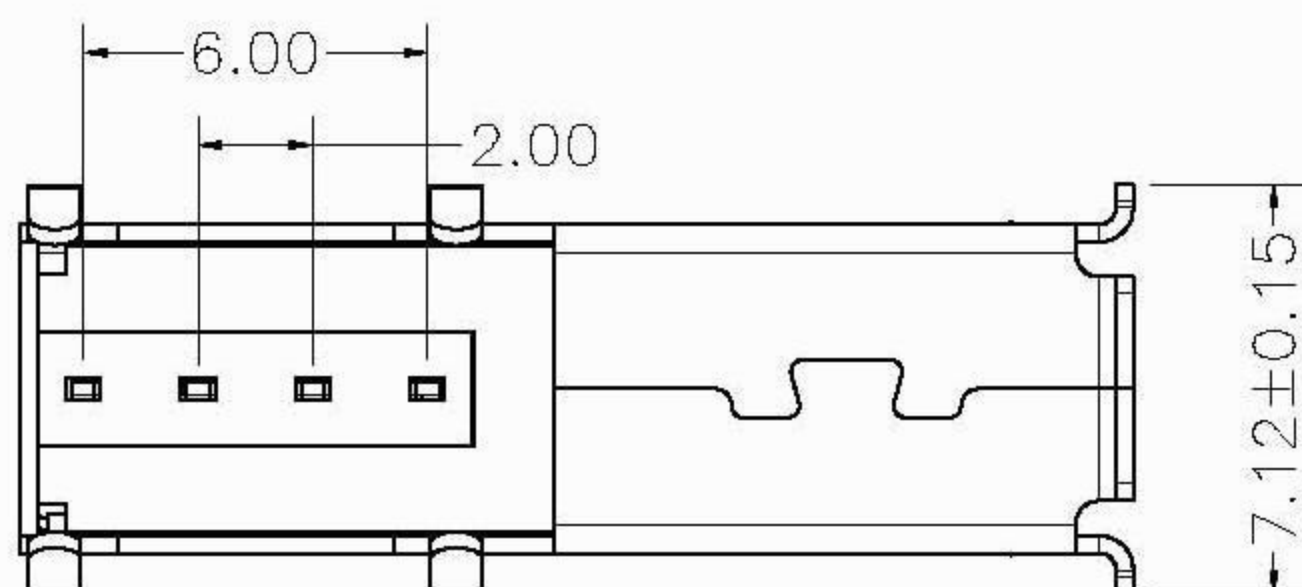

PCB LAYOUT

UNLESS TOLERANCE		DRAW BY	杨国祥	L&X 深圳市连欣科技有限公司	
GENERAL	ANGLE	DESIGN BY	袁刚	PART NO: XDBF-0525-06	
X. ± 0.30	X.° ± 3.0°	CHECK BY		ITEM : USB AF 90度 侧插(长体)连后盖	
.X ± 0.20	.X° ± 2.0°	APPROVE BY			
.XX ± 0.15	.XX° ± 1.0°				
.XXX ± 0.08	.XXX° ± 0.5°				
		SCALE	SHEET	UNIT	REV: A
		1:1	1/1	MM	