
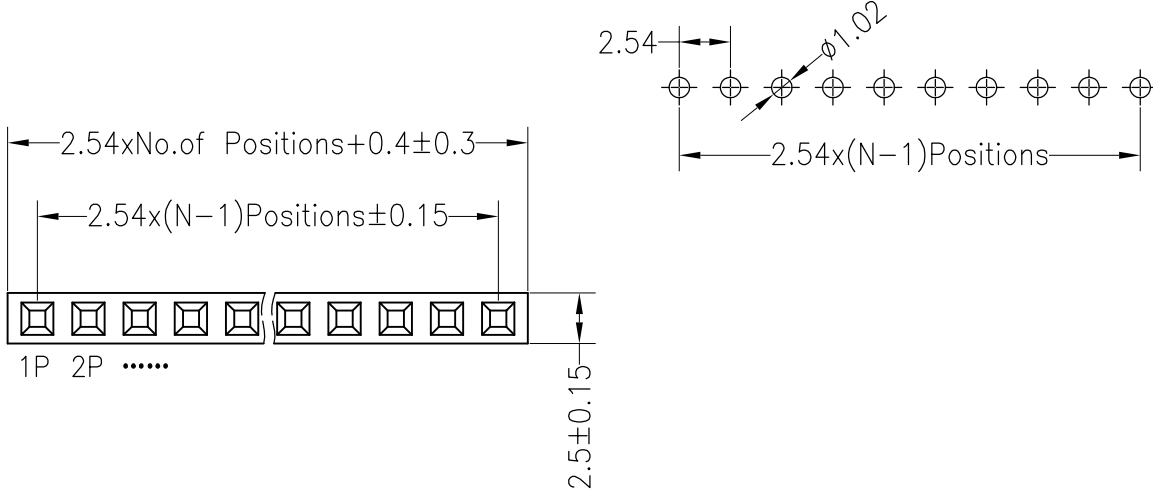
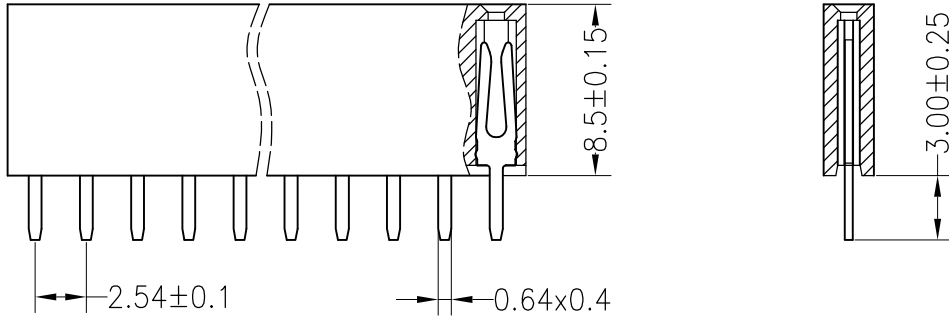

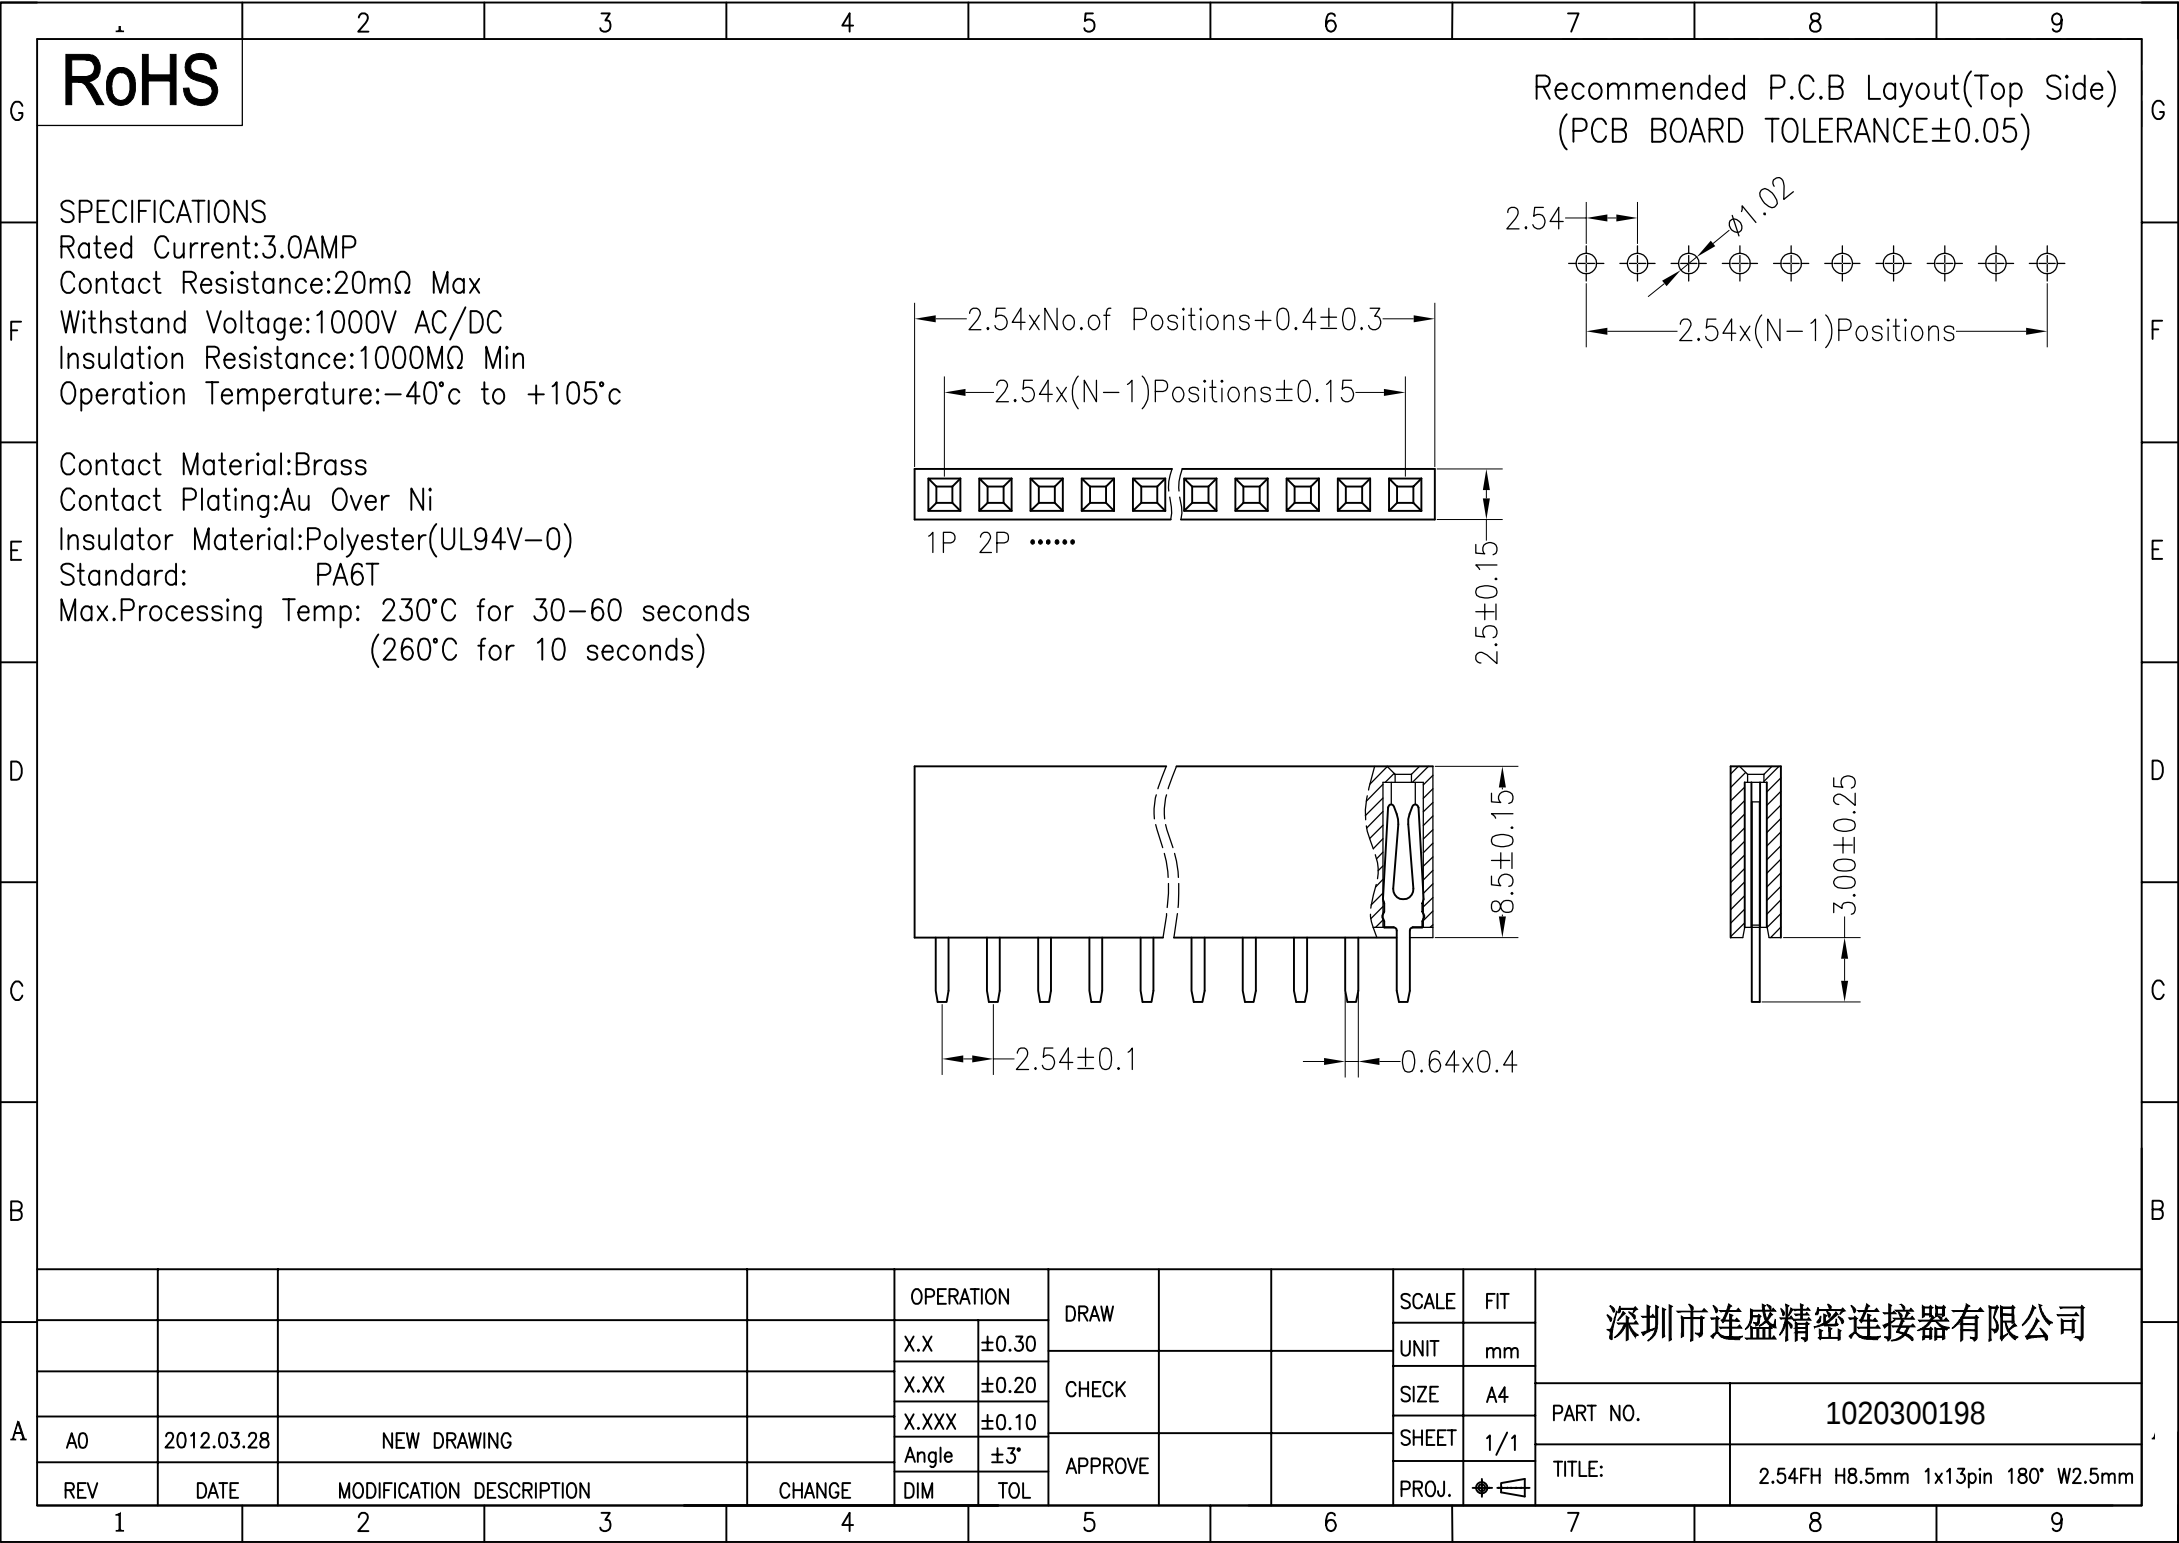
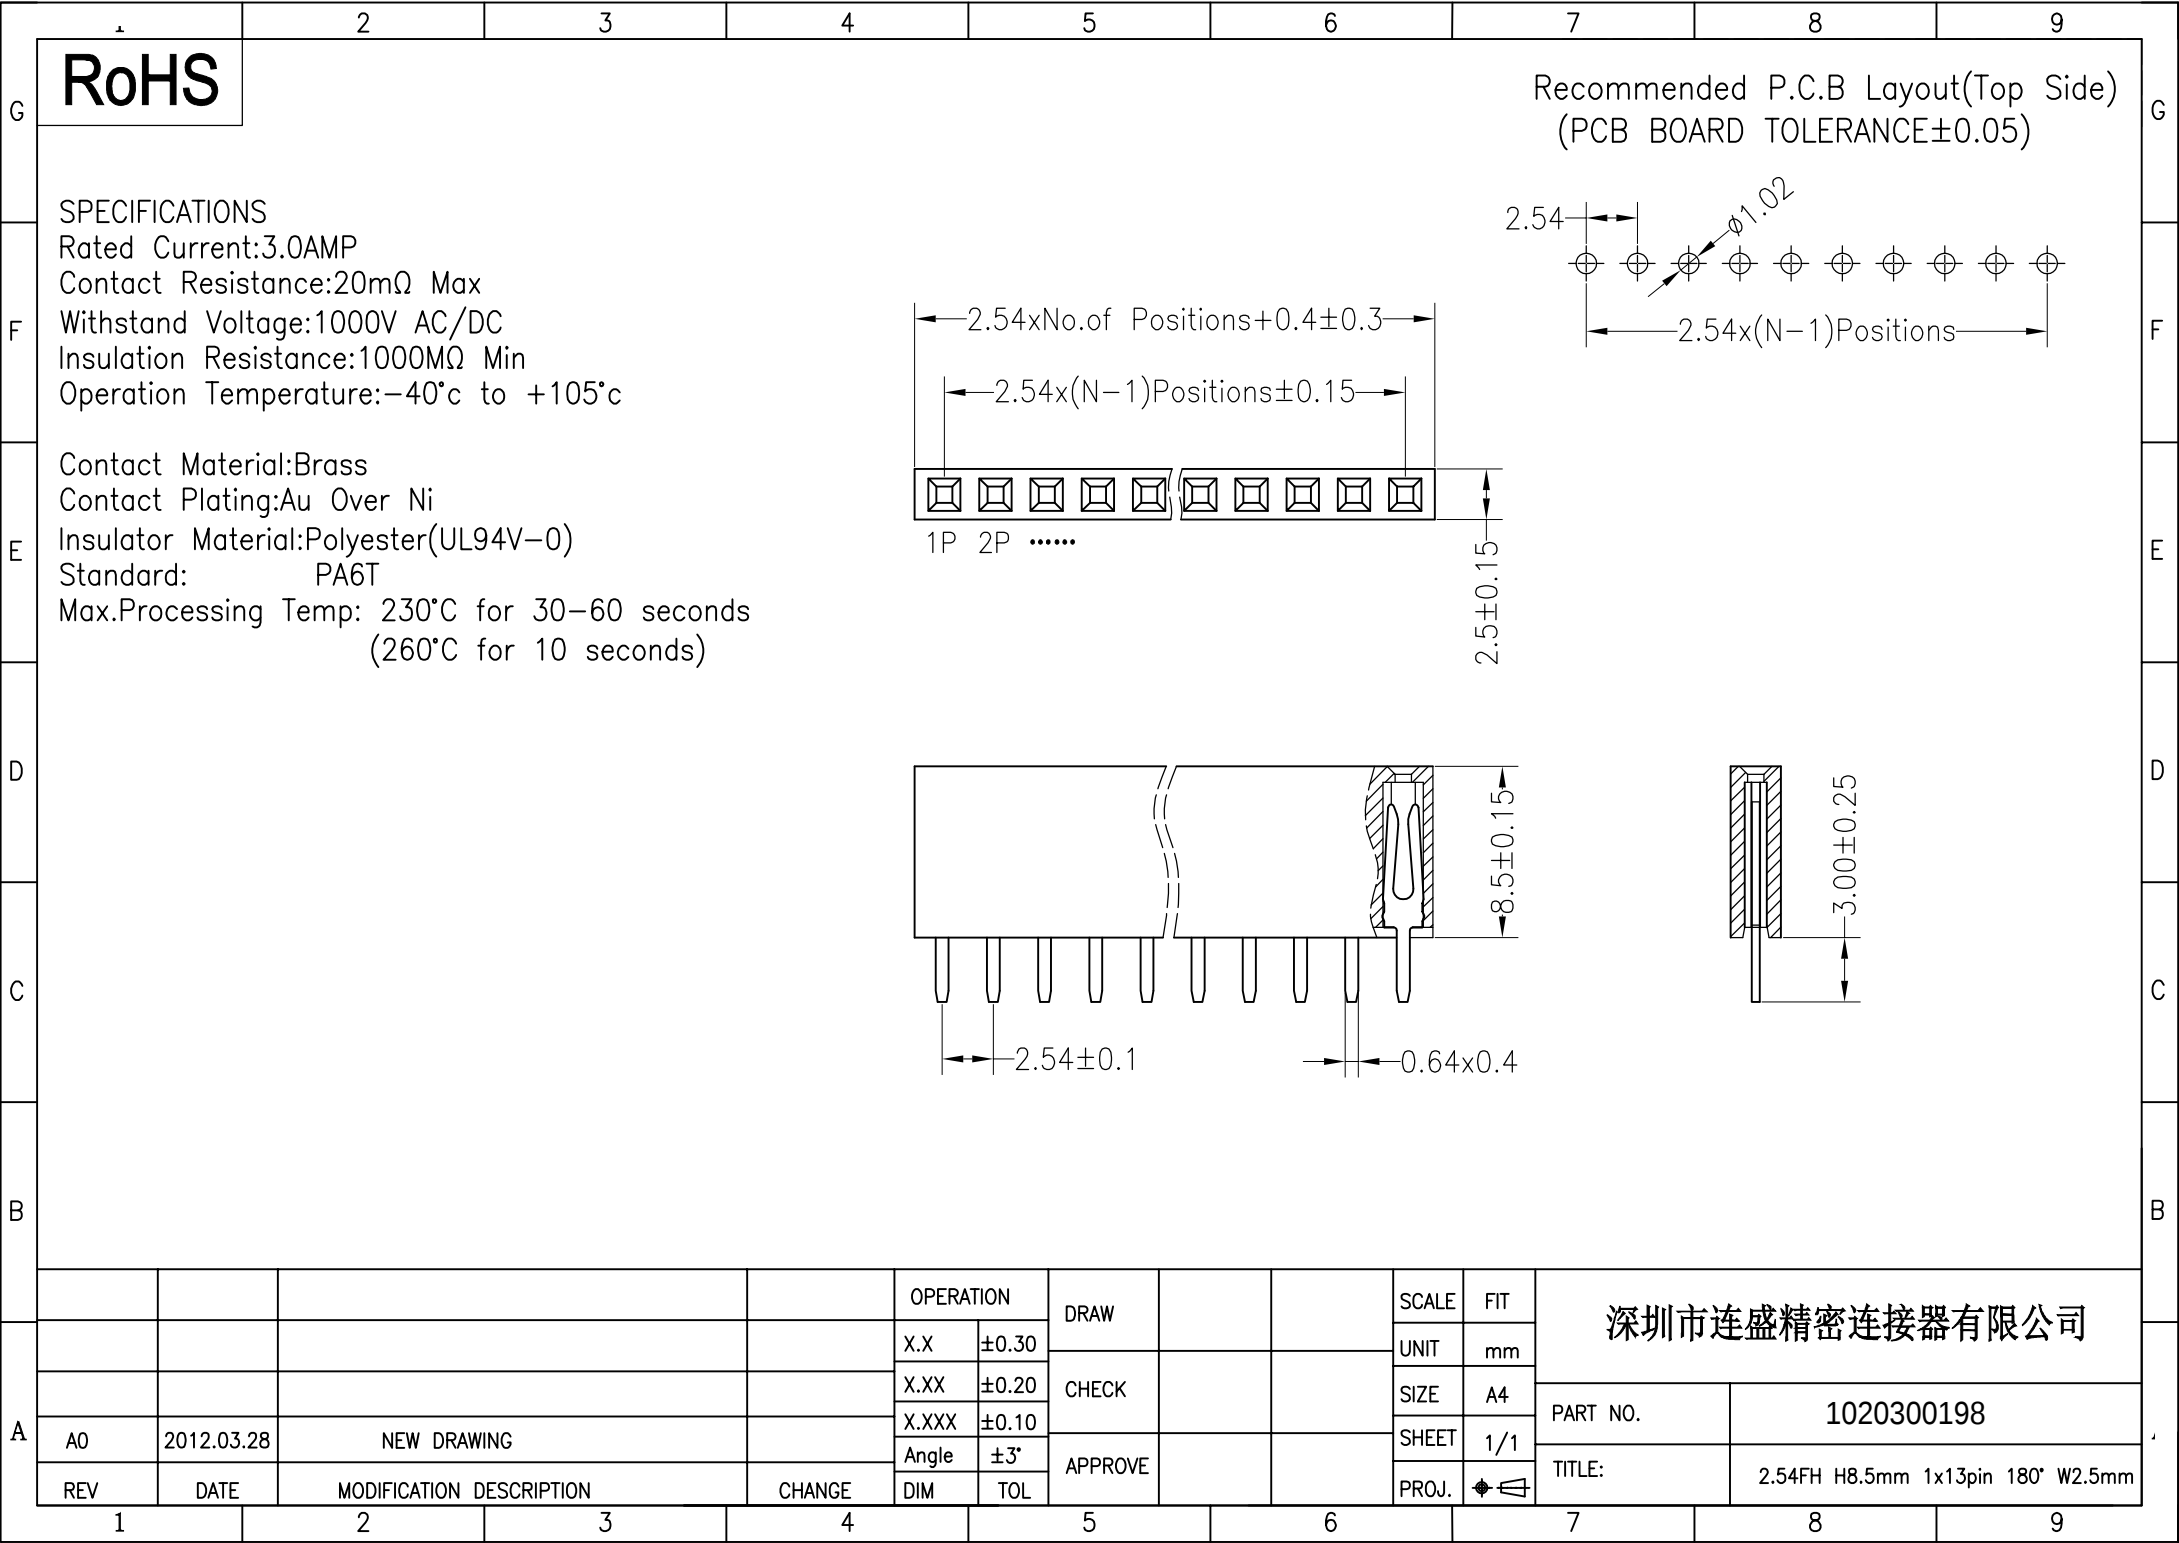
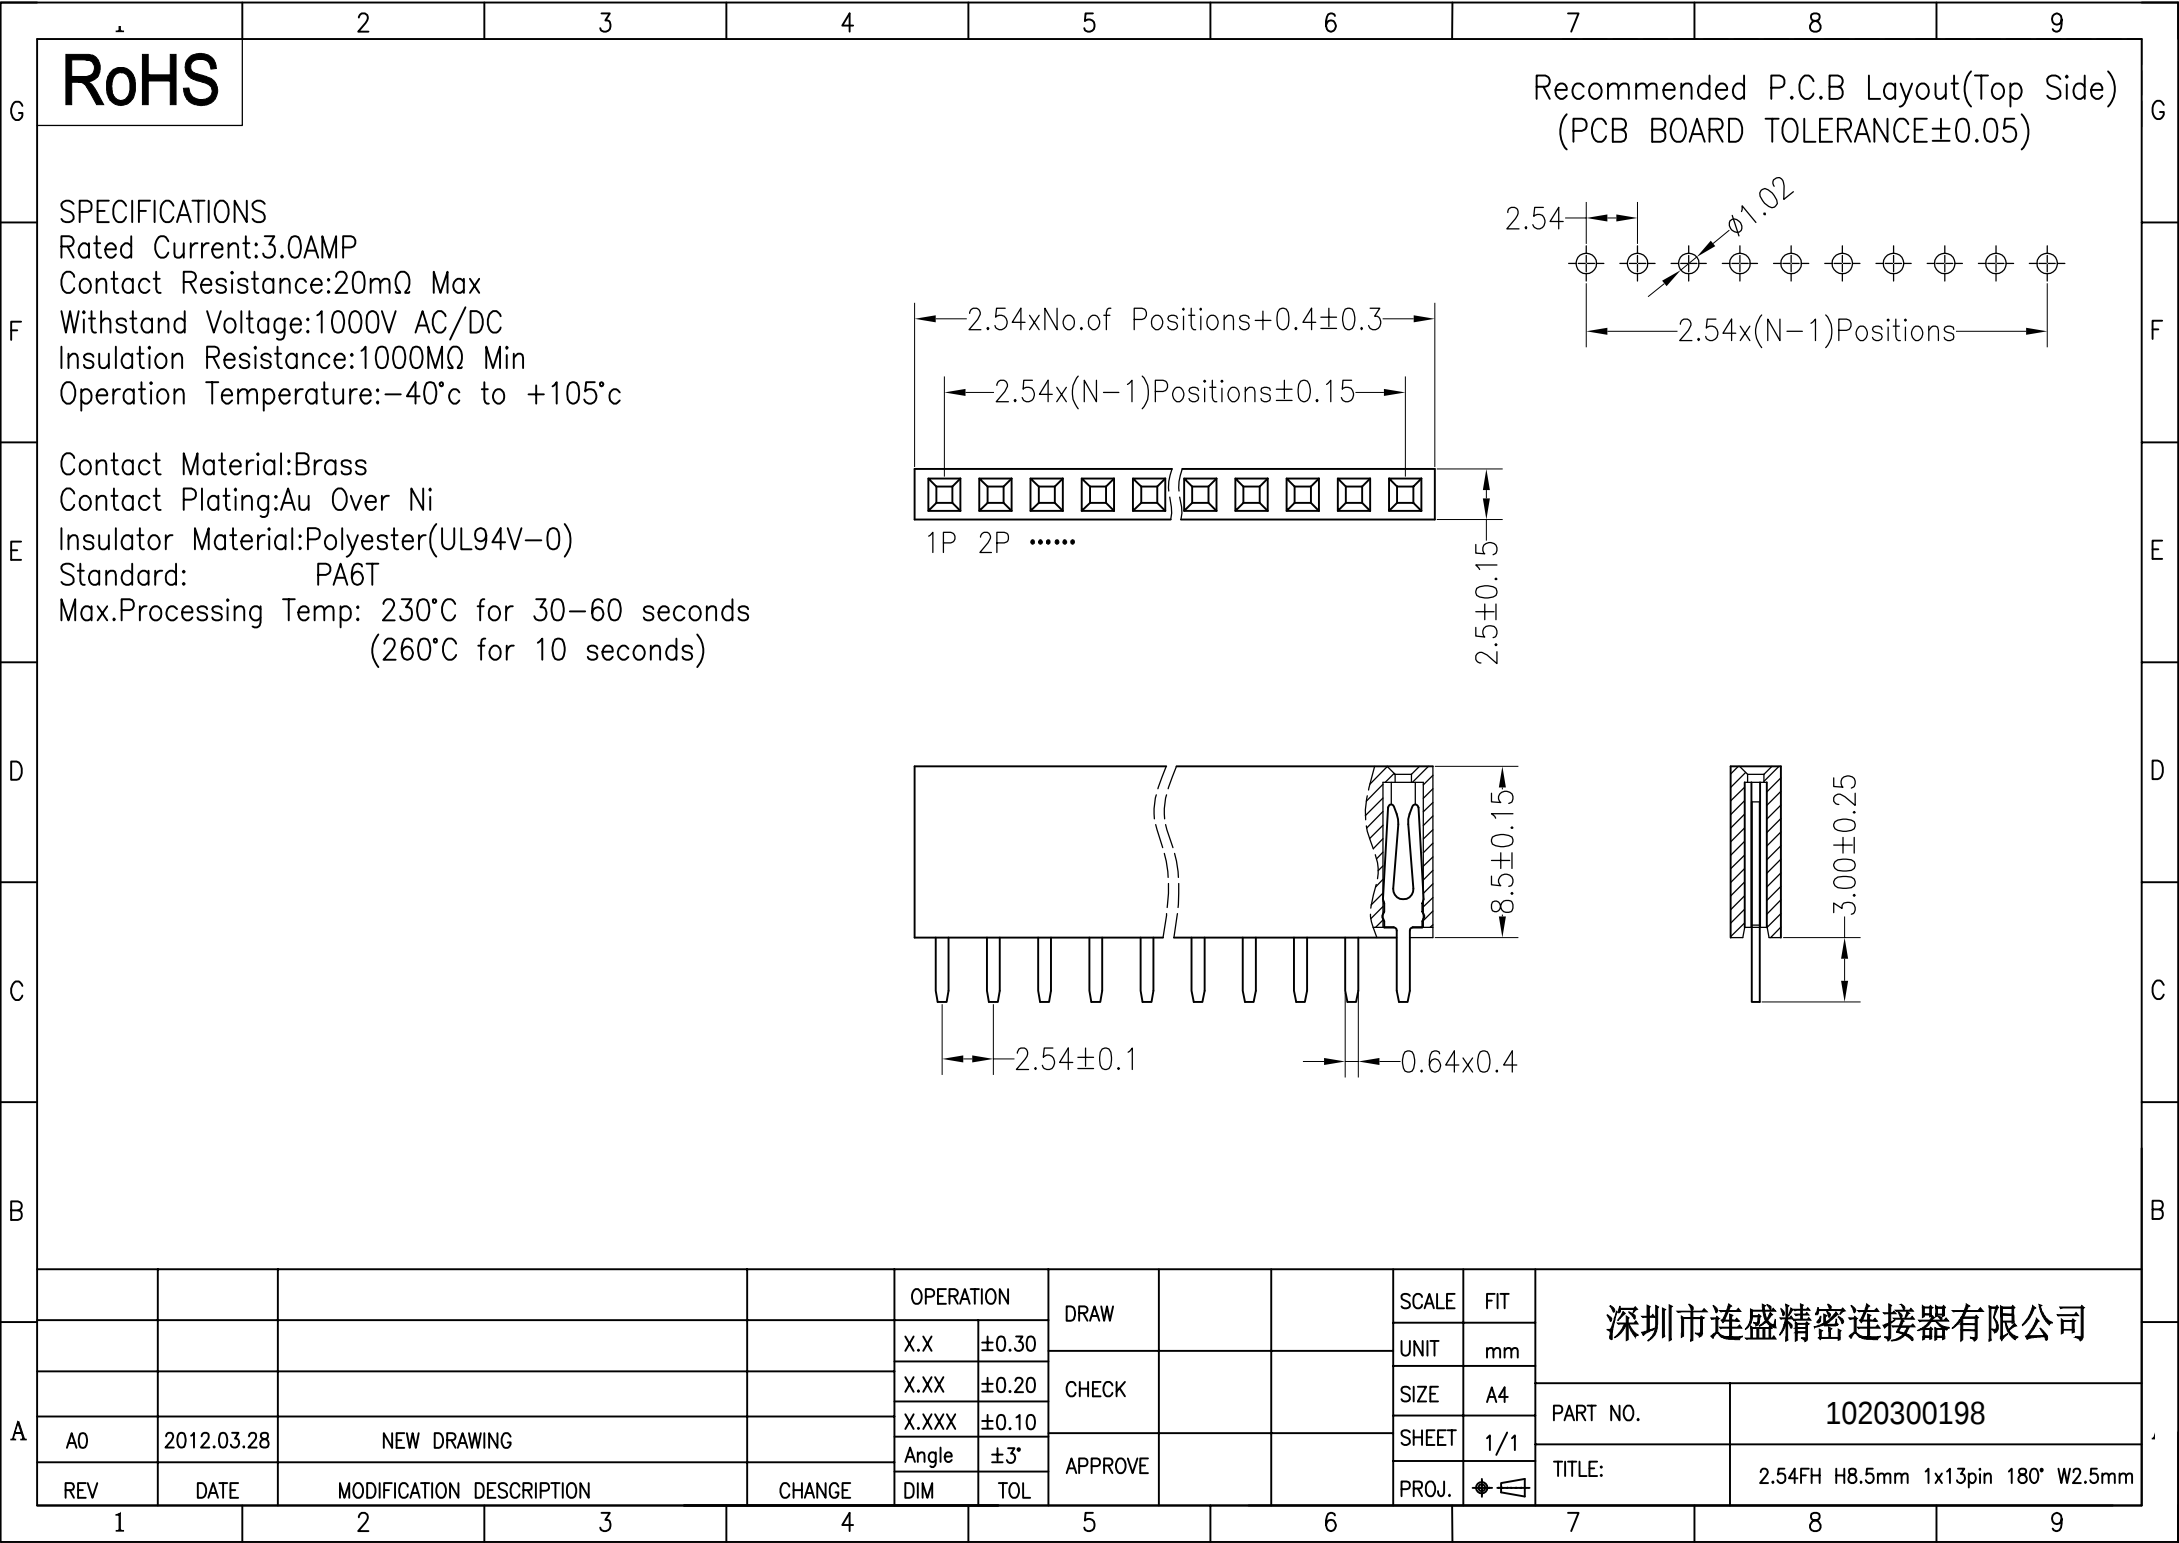
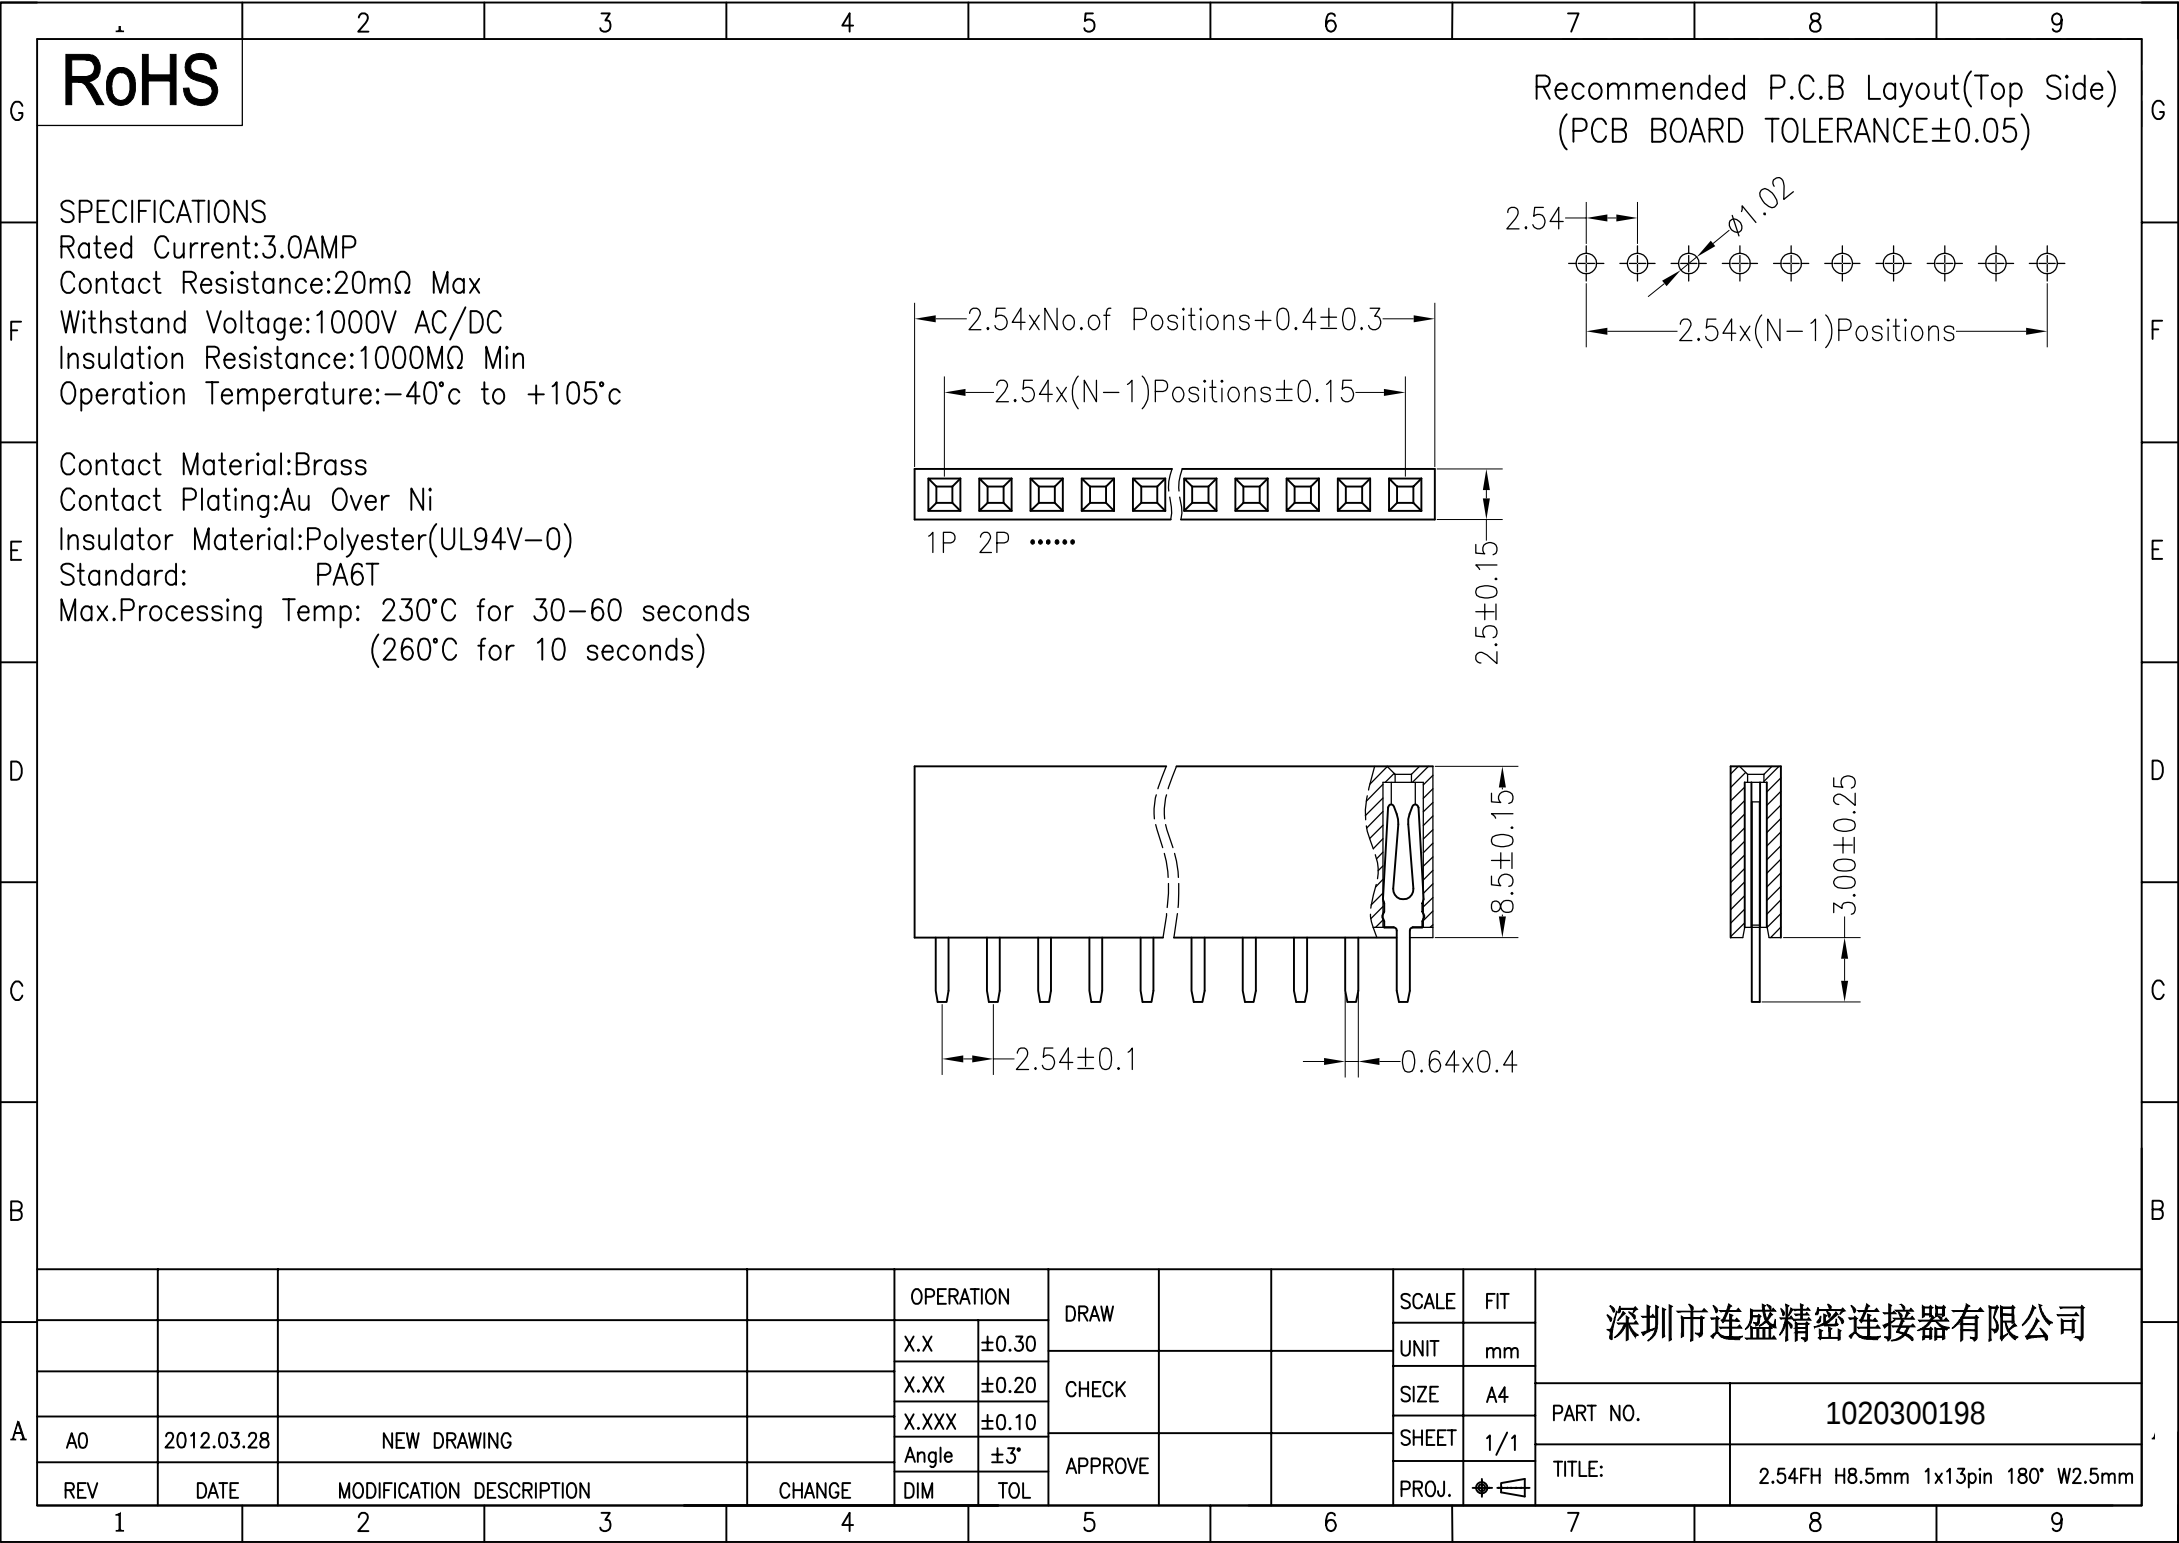


G	RoHS								G																																																																													
F							Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)		F																																																																													
E	SPECIFICATIONS Rated Current:3.0AMP Contact Resistance:20mΩ Max Withstand Voltage:1000V AC/DC Insulation Resistance:1000MΩ Min Operation Temperature:-40℃ to +105℃ Contact Material:Brass Contact Plating:Au Over Ni Insulator Material:Polyester(UL94V-0) Standard: PA6T Max.Processing Temp: 230°C for 30-60 seconds (260°C for 10 seconds)								E																																																																													
D									D																																																																													
C									C																																																																													
B									B																																																																													
A	<table border="1"><tr><td></td><td></td><td></td><td></td><td colspan="2">OPERATION</td><td rowspan="2">DRAW</td><td></td><td></td><td>SCALE</td><td>FIT</td><td colspan="2" rowspan="3">深圳市连盛精密连接器有限公司</td></tr><tr><td></td><td></td><td></td><td></td><td>X.X</td><td>±0.30</td><td></td><td></td><td></td><td>UNIT</td><td>mm</td></tr><tr><td></td><td></td><td></td><td></td><td>X.XX</td><td>±0.20</td><td rowspan="2">CHECK</td><td></td><td></td><td>SIZE</td><td>A4</td></tr><tr><td></td><td>A0</td><td>2012.03.28</td><td>NEW DRAWING</td><td></td><td>X.XXX</td><td>±0.10</td><td></td><td></td><td>SHEET</td><td>1/1</td><td>PART NO.</td><td>1020300198</td></tr><tr><td>REV</td><td>DATE</td><td colspan="2">MODIFICATION DESCRIPTION</td><td>CHANGE</td><td>Angle</td><td>±3°</td><td>APPROVE</td><td></td><td></td><td>PROJ.</td><td>TITLE:</td><td colspan="2">2.54FH H8.5mm 1x13pin 180° W2.5mm</td></tr><tr><td colspan="2">1</td><td colspan="2">2</td><td>3</td><td colspan="2">4</td><td colspan="2">5</td><td colspan="2">6</td><td>7</td><td colspan="2">8</td><td>9</td></tr></table>													OPERATION		DRAW			SCALE	FIT	深圳市连盛精密连接器有限公司						X.X	±0.30				UNIT	mm					X.XX	±0.20	CHECK			SIZE	A4		A0	2012.03.28	NEW DRAWING		X.XXX	±0.10			SHEET	1/1	PART NO.	1020300198	REV	DATE	MODIFICATION DESCRIPTION		CHANGE	Angle	±3°	APPROVE			PROJ.	TITLE:	2.54FH H8.5mm 1x13pin 180° W2.5mm		1		2		3	4		5		6		7	8		9
				OPERATION		DRAW			SCALE	FIT	深圳市连盛精密连接器有限公司																																																																											
				X.X	±0.30					UNIT			mm																																																																									
				X.XX	±0.20	CHECK			SIZE	A4																																																																												
	A0	2012.03.28	NEW DRAWING		X.XXX		±0.10			SHEET	1/1	PART NO.	1020300198																																																																									
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	Angle	±3°	APPROVE			PROJ.	TITLE:	2.54FH H8.5mm 1x13pin 180° W2.5mm																																																																										
1		2		3	4		5		6		7	8		9																																																																								

G	RoHS																																																																																			
F	SPECIFICATIONS Rated Current:3.0AMP Contact Resistance:20mΩ Max Withstand Voltage:1000V AC/DC Insulation Resistance:1000MΩ Min Operation Temperature:-40°c to +105°c						Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05) 2.54 2.54x(N-1)Positions 2.54xNo.of Positions+0.4±0.3 2.54x(N-1)Positions±0.15 1P 2P 2.5±0.15																																																																													
E	Contact Material:Brass Contact Plating:Au Over Ni Insulator Material:Polyester(UL94V-0) Standard: PA6T Max.Processing Temp: 230°C for 30-60 seconds (260°C for 10 seconds)																																																																																			
D																																																																																				
C	8.5±0.15 2.54±0.1 -0.64x0.4						3.00±0.25																																																																													
B																																																																																				
A	<table><tr><td></td><td></td><td></td><td></td><td colspan="2">OPERATION</td><td rowspan="2">DRAW</td><td></td><td></td><td>SCALE</td><td>FIT</td><td colspan="2" rowspan="3">深圳市连盛精密连接器有限公司</td></tr><tr><td></td><td></td><td></td><td></td><td>X.X</td><td>±0.30</td><td></td><td></td><td></td><td>UNIT</td><td>mm</td></tr><tr><td></td><td></td><td></td><td></td><td>X.XX</td><td>±0.20</td><td rowspan="2">CHECK</td><td></td><td></td><td>SIZE</td><td>A4</td></tr><tr><td></td><td>A0</td><td>2012.03.28</td><td>NEW DRAWING</td><td></td><td>X.XXX</td><td>±0.10</td><td></td><td></td><td>SHEET</td><td>1/1</td><td>PART NO.</td><td>1020300198</td></tr><tr><td></td><td>REV</td><td>DATE</td><td>MODIFICATION DESCRIPTION</td><td>CHANGE</td><td>Angle</td><td>±3°</td><td rowspan="2">APPROVE</td><td></td><td></td><td></td><td>TITLE:</td><td colspan="2">2.54FH H8.5mm 1x13pin 180° W2.5mm</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>DIM</td><td>TOL</td><td></td><td></td><td>PROJ.</td><td></td><td></td><td></td></tr></table>													OPERATION		DRAW			SCALE	FIT	深圳市连盛精密连接器有限公司						X.X	±0.30				UNIT	mm					X.XX	±0.20	CHECK			SIZE	A4		A0	2012.03.28	NEW DRAWING		X.XXX	±0.10			SHEET	1/1	PART NO.	1020300198		REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	±3°	APPROVE				TITLE:	2.54FH H8.5mm 1x13pin 180° W2.5mm							DIM	TOL			PROJ.			
				OPERATION		DRAW			SCALE	FIT	深圳市连盛精密连接器有限公司																																																																									
				X.X	±0.30					UNIT			mm																																																																							
				X.XX	±0.20	CHECK			SIZE	A4																																																																										
	A0	2012.03.28	NEW DRAWING		X.XXX		±0.10			SHEET	1/1	PART NO.	1020300198																																																																							
	REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	±3°	APPROVE				TITLE:	2.54FH H8.5mm 1x13pin 180° W2.5mm																																																																								
					DIM	TOL				PROJ.																																																																										
	1	2	3	4	5	6	7	8	9																																																																											

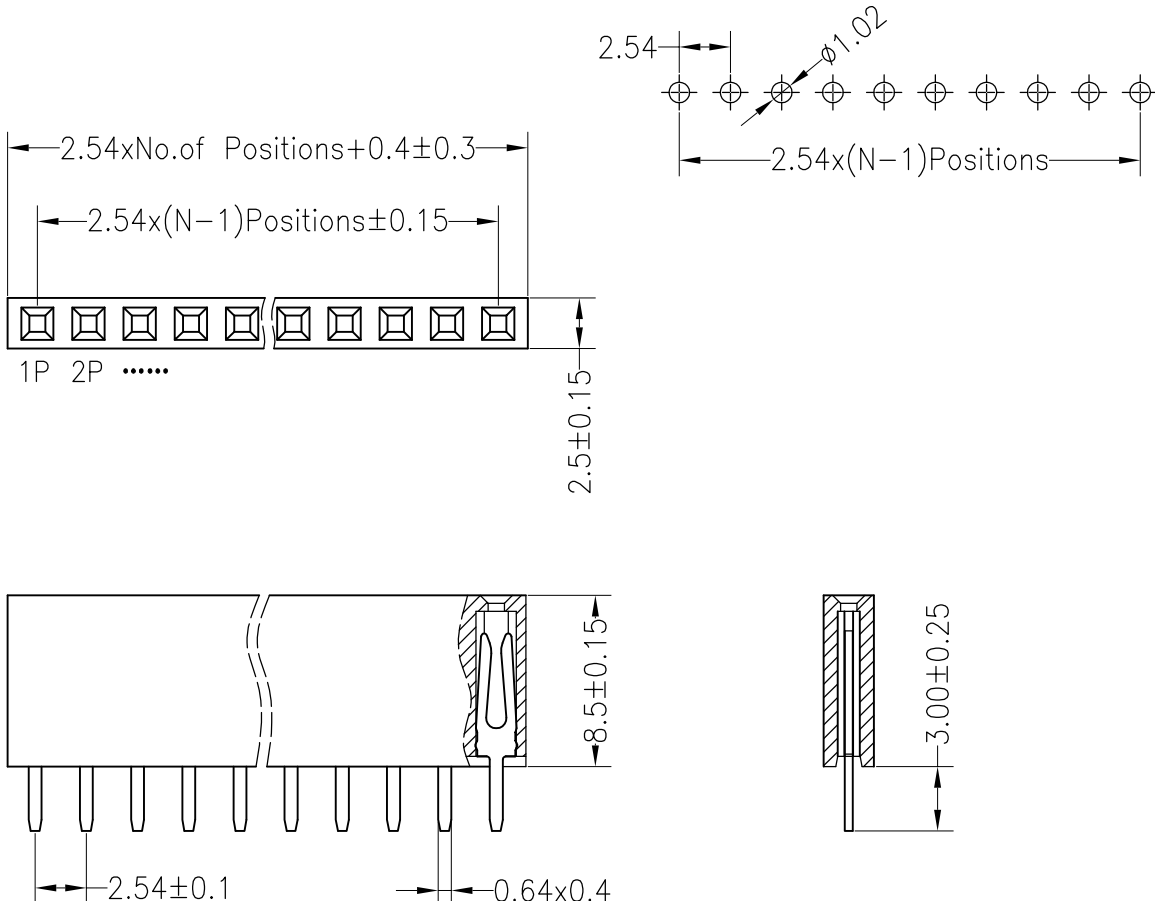

RoHS		2	3	4	5	6	7	8	9
SPECIFICATIONS		Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)							
Rated Current:3.0AMP									
Contact Resistance:20mΩ Max									
Withstand Voltage:1000V AC/DC									
Insulation Resistance:1000MΩ Min									
Operation Temperature:−40°c to +105°c									
Contact Material:Brass									
Contact Plating:Au Over Ni									
Insulator Material:Polyester(UL94V−0)									
Standard: PA6T									
Max.Processing Temp: 230°C for 30−60 seconds (260°C for 10 seconds)									
</									