ROHS

Http://www.krhro.com





3D VIEW

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 100 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;
8. TERPROOF LEVEL: IPX7;

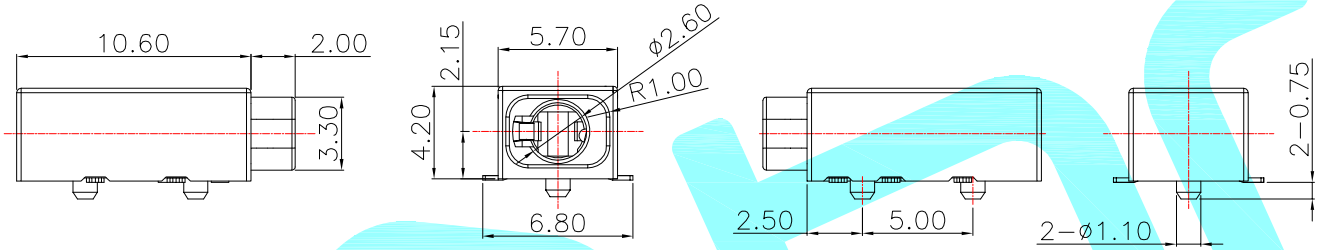



Schematic



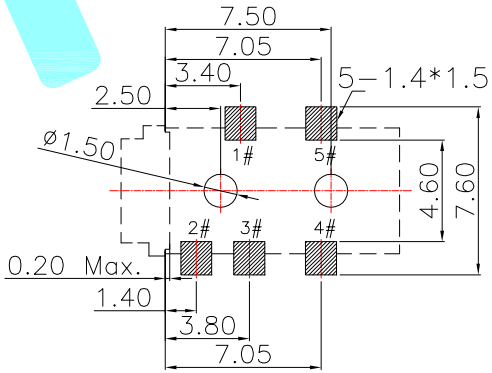

RECOMMENDED P.C.B LAYOU
TOP VIEW (TOLRANCE:±0.05)

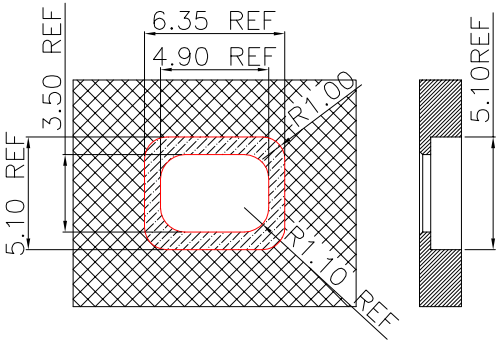



面板开孔参考尺寸

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
③	Silica gel	——	1	Silica gel	Black	——
②	Terminal	——	5	Phosphor bronze	Au Plating	——
①	Housing	——	1	HTP	Black	——

APPROVALS		DATE	
DRAWN	LIUCAN	2021.3.26	hro®
CHECKED			TITLE: PHONE JACKES
APPROVALS			PART NO. PJ-259-5A

TOLERANCES ARE			ANGLE	UNIT: mm	SCALE: 1:1	PROJ:
	30~以上	±0.30	±2°	DRAWING NO.	——	SHEET 1 OF 1
	10~30	±0.20				
	5~10	±0.15				
	~ 5	±0.10				

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
——	A	——	NEW	——	——	——