
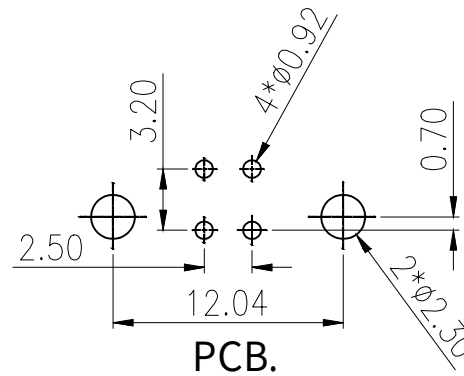
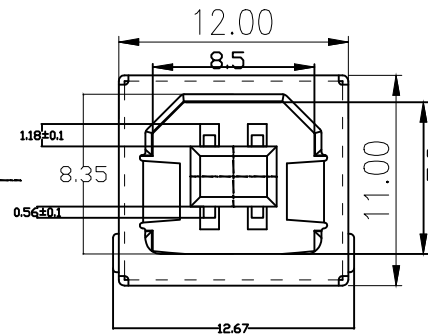


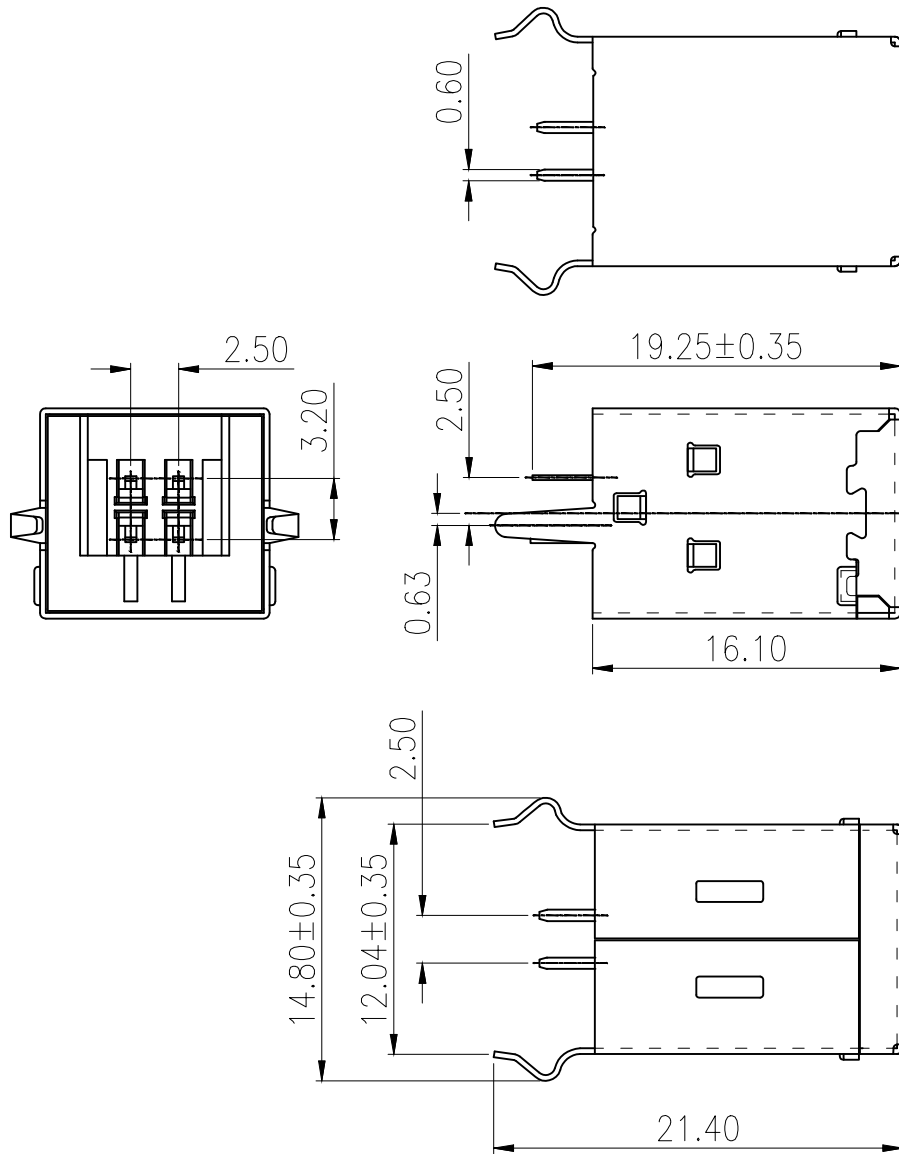

NOTES:

1.MATERIAL:

1.1 Housing:PBT ,UL94-HB

1.2 terminals:Copper Alloy

Gold plated in contact area:

Tin 40u"min plated in termination

Nickel Plated overall

1.3 Shell:SPCC t=0.30mm,

Nickel 40u"min Plated overall

2.ELECTRICAL CHARACTERISTICS:

2.1 Rating Current :1.5 Ampere

2.2 Rating Voltage :30 V Max

2.3 Contact Resistance:30 Milli ohms

2.4 Insulation Resistance:1000 Mega ohms Min.

3.MECHANICAL CHARACTERISTICS:

3.1 Connector Mating force: 35N MAX(3.57Kgf)

3.2 Connector Unmating force:10N min(1.02Kgf)

3.3 Durability:1500Cycles.

4.ENVIRONMENT CHARACTERISTICS:

4.1 Operating temperature:-0℃ to +50℃

4.2 Storage temperature:-20℃ to +60℃

可以过波峰焊

04XN-2XC2
1:AU 1U"
6:AU 30U"
T:TIN
N:NICKEL
B:Black W:White

		new		2015/5/3		A		瀚源	
ECN BO.		DESCRIPTION.		DATE.		REV.			
DESIGNED	CHECKED	APPROVAL	DRAWING NUMBER				SCALT: 1/2	SCALE: 3:1	
Mikey	Tom	Jerry	PART NAME	04XN-2XC2		UNLESS OTHERWISE SPECIFIED,TOLERANCE:		X. ±0.25	
			MODEL NAME	04XN-2XC2				X.x ±0.20 X.xx ±0.15 ANGULAIR ±3	
			3RD ANGLE PROJ	HanElectricity Co.,LTD					FILE.NO.