

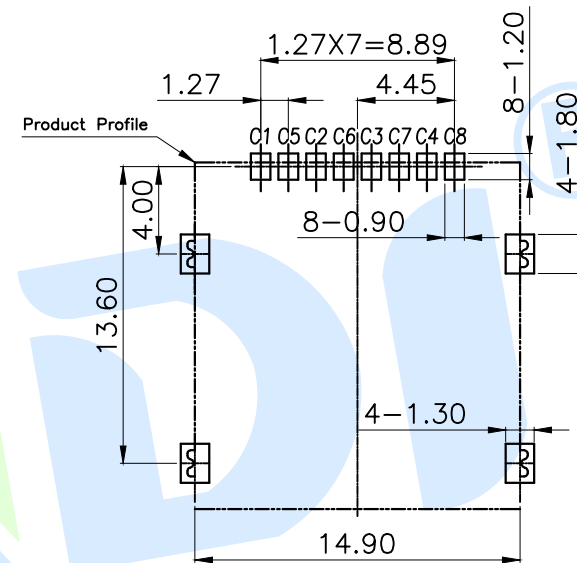
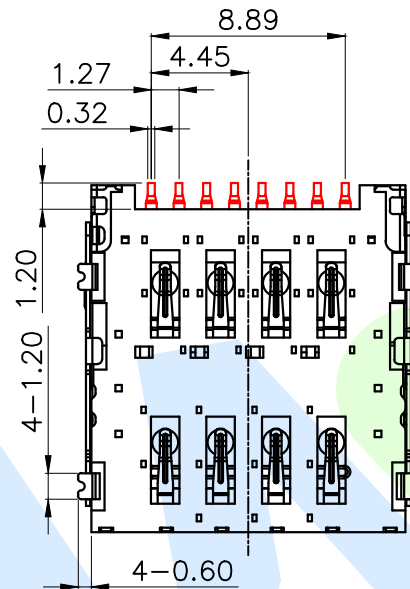


RoHS

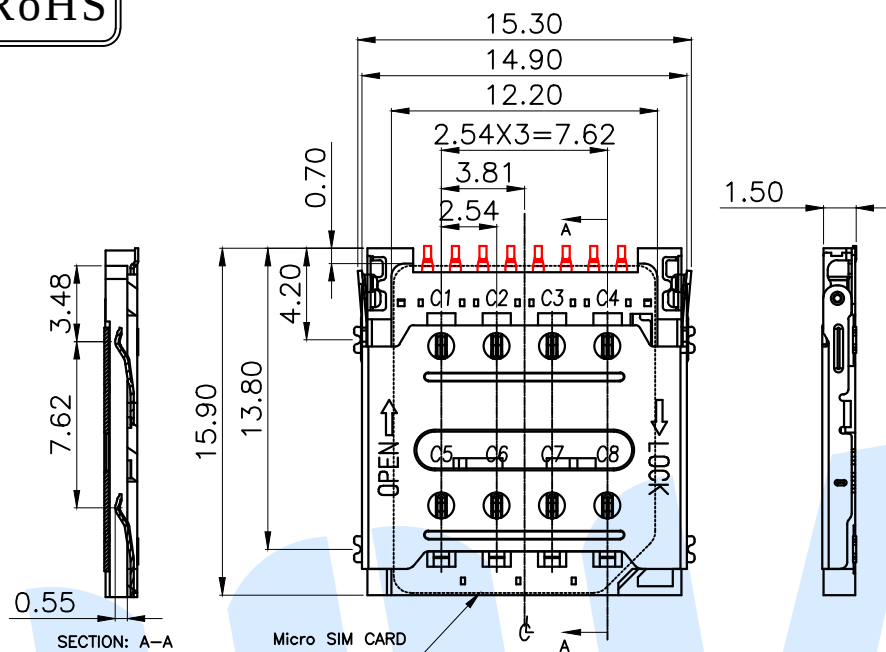

RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE: +/-0.05)

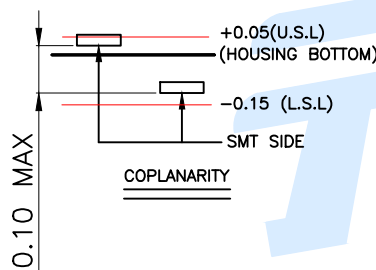

- Specifications/技术规格:
- 1.Current rating/ 额定电流: 0.5A
 - 2.Voltage rating/ 额定电压: 50V DC
 - 3.Insulation Resistance/ 绝缘电阻: 100MΩ Min
 - 4.Dielectric Withstanding/ 耐电压: 500V AC/minute
 - 5.Contact Resistance/ 接触电阻: 60mΩ Max
 - 6.Durability/ 耐久性: 5,000 Insertions
 - 7.Operating Temperature/ 工作温度: -25℃ to +85℃

SIM CARD	
PIN NO.	NAME
C1	VCC供电电压
C2	RST重置
C3	CLK时钟
C4	RESERVED预留端口
C5	GND接地
C6	VPP程序电压
C7	I/O输入输出
C8	RESERVED预留端口


STEP 1 INSERT Micro-SIM CARD

STEP 2 PUSH THE SHELL

STEP 3 FINISH

①	Contact point		8	Phosphor bronze	Au Plated
②	Terminal		8	Phosphor bronze	Sn Plated
③	Cover		1	SUS	
④	Base		1	LCP	Black
NO.	Name	Number	Qty	Materil	Remarks
YUANDI® Yuandi Electronics Co.,Ltd					
design		date		name	MICRO SIM CARD CONNECTOR
Review		date			
Approved		date		model	MICRO-SIM-012
number:					
unit	mm	gape number			A4

RoHS

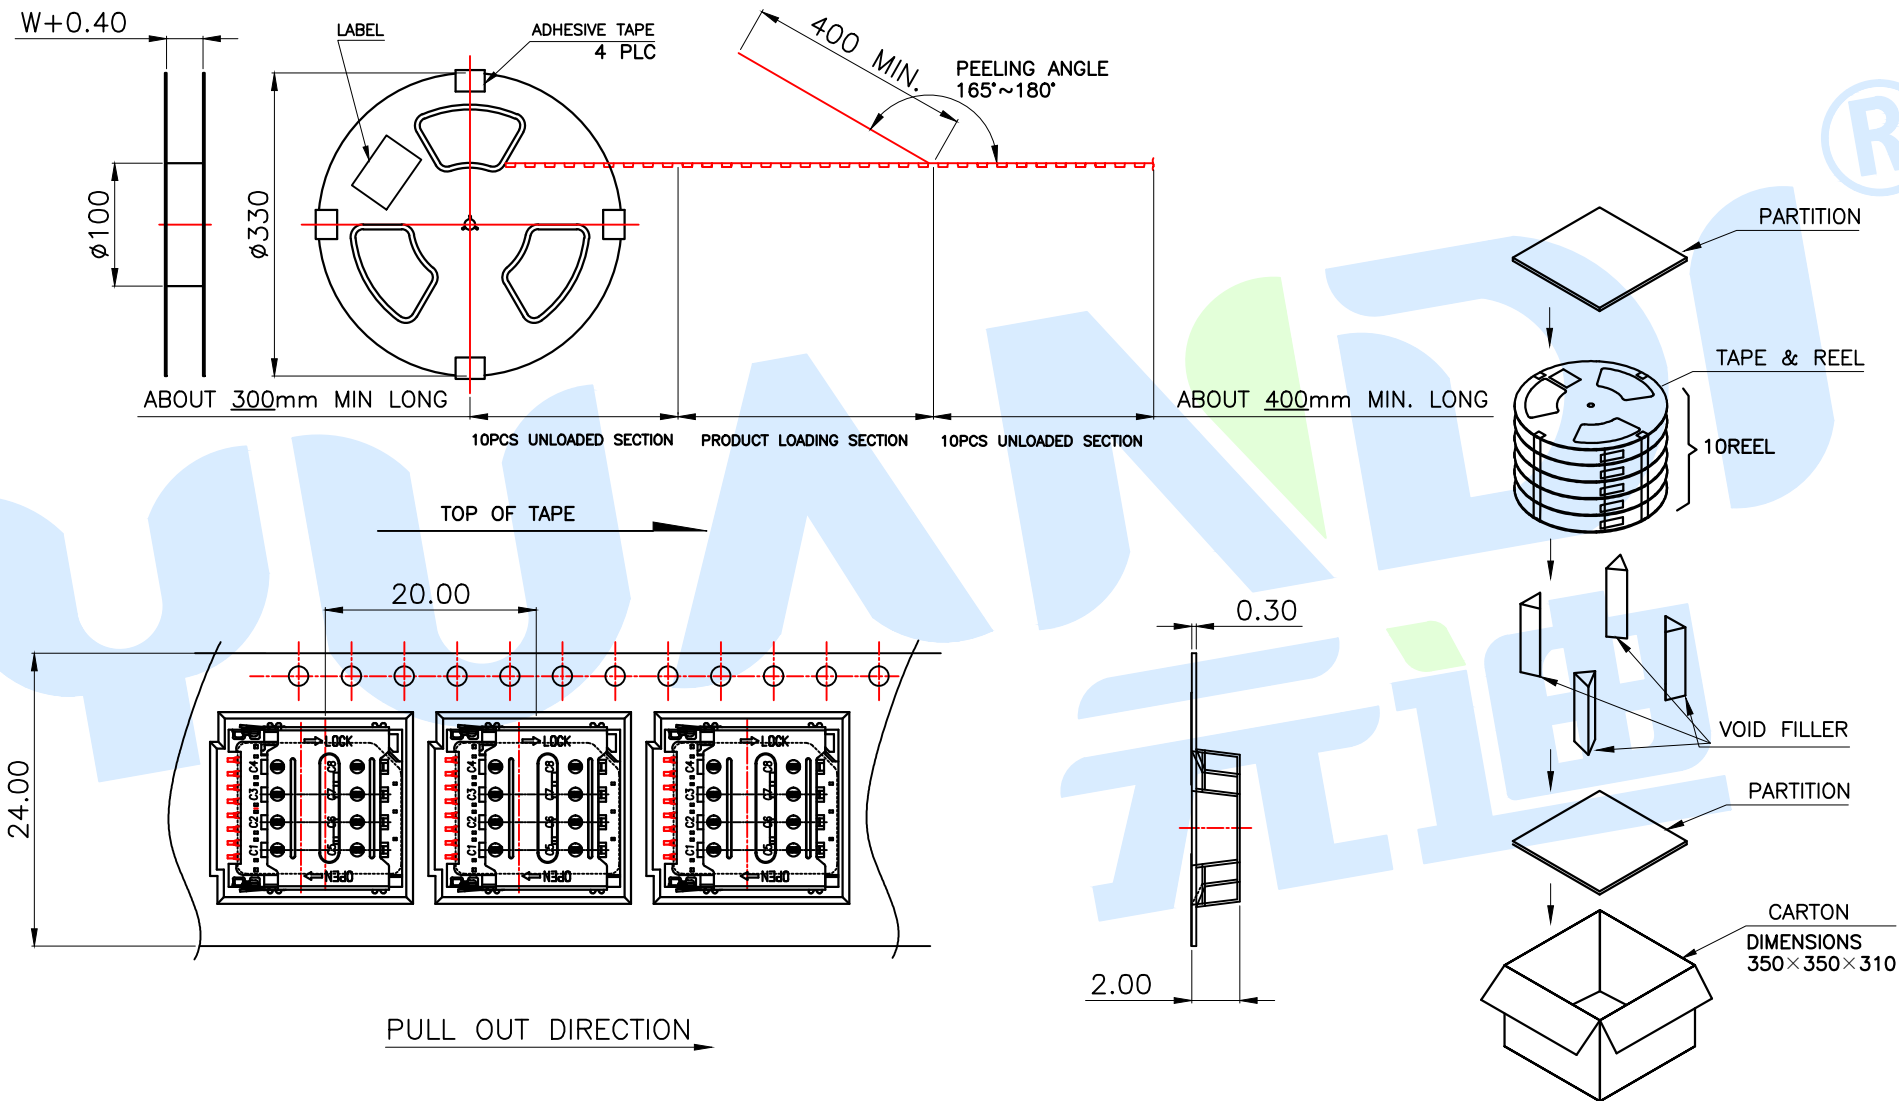

YUANDI® Yuandi Electronics Co.,Ltd

design	date	name	MICRO SIM CARD CONNECTOR
Review	date	model	MICRO-SIM-012
Approved	date		

Drawing number:		Proportion	1:1	unit	mm	gape number	A4
-----------------	--	------------	-----	------	----	-------------	----

modify	Review	Approved	Tolerance not specified
--------	--------	----------	-------------------------