

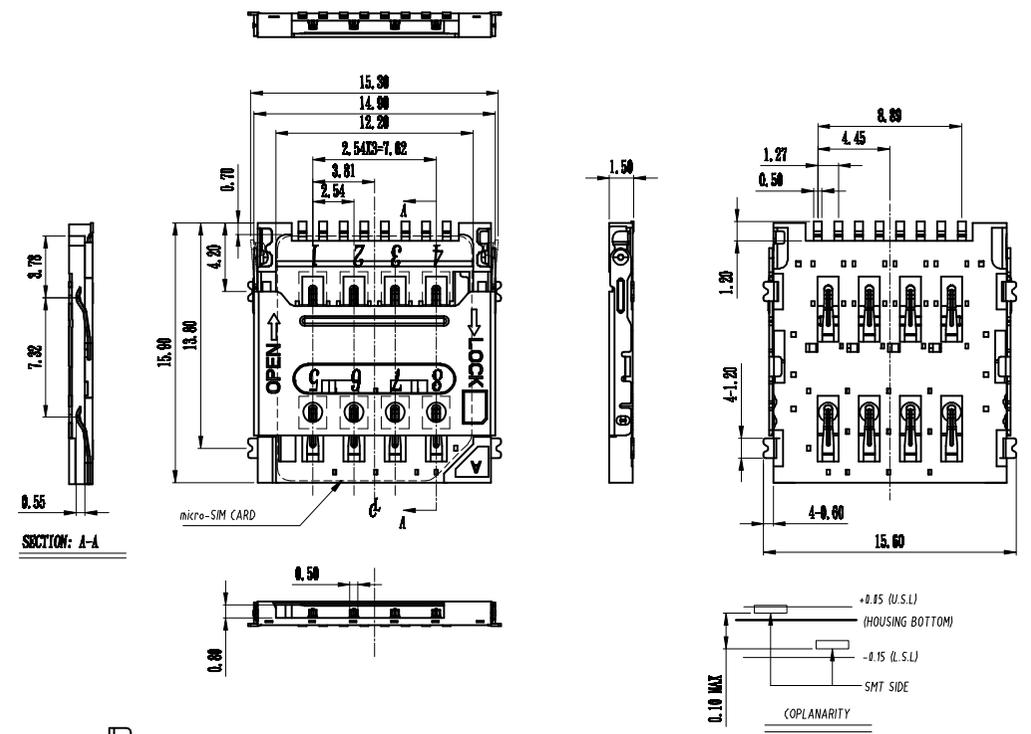


RoHS HSF

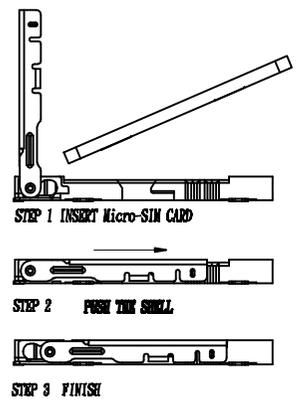

- NOTES:
- ELECTRICAL CHARACTERISTICS
 - CONTACT RESISTANCE: 80 Milliohms Max
 - INSULATION RESISTANCE: 1,000 Megohms Min.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE
 - MECHANICAL CHARACTERISTICS
 - OPERATION TEMPERATURE RANGE: -25°C~+70°C
 - DURABILITY: 5000 CYCLES
 - MATERIAL:
 - HOUSING: THERMOPLASTIC, UL 94-V0
 - TERMINAL: PHOSPHOR BRONZE, T-0.15
 - SHELL: STAINLESS STEEL, T-0.15
 - FINISHES:
 - TERMINAL: Ni PLATED UNDER, Au PLATED ON CONTACT AREA, G/F PLATED ON SOLDER TAIL

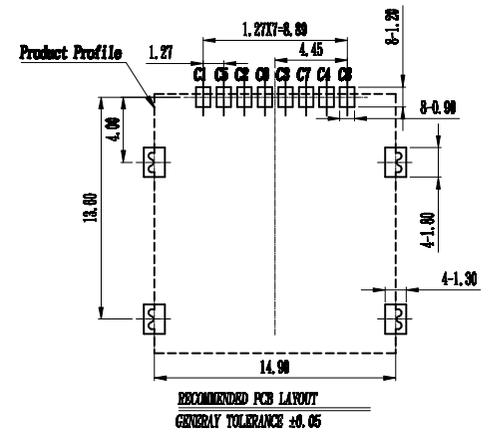

SIM CARD	
Pin No.	NAME
C1	VCC
C2	RST
C3	CLK
C4	RESERVED
C5	GND
C6	TPP
C7	I/O
C8	RESERVED

兆星精密电子(深圳)有限公司

E	PRODUCT SPEC.	MICRO SIM
PART NO.	翻盖式 MicroSIM卡卡座	
TITLE:	ZX-MSIM-281.5J	
FILE NAME:		
SCALE	1:1	UNIT:mm A4
		SHEET: 1 of 1

General	Angle	设计				
X±0.50	X'±2'	DESIGN				
.X±0.30	.X'±1'	校阅				
.XX±0.20	.XX'±0.5'	CHECK				
GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED		承认				
		APPRO.				

工程变更通知单号 ECN(DCN) NO.	版次 REV	日期 DATE	说明 DESCRIPTION	改变 CHANGE	承认 APPRO.
	A		NEW RELEASE		