


Operation:NANO-SIM SOCKETS & 推-拉式(PUSH-PULL) NANO 型识别卡座



ITEM NO.:SNO-1308 (Consumer Electronics)

(12.3L×9.75W×1.15H & NANO-SIM Sockets)

MEMORY-CARD-SOCKETS



LEVEL			
PROJECT		A[better product]	B[average product]
Electrical Properties	Contact Rating	0.5A, 30V DC	
	Initial Contact Resistance	50mΩ max.	80mΩ max.
	Insulation Resistance	100MΩ min.500V DC	
	Withstand Voltage	500V AC for 1 minute	350 V AC for 1 minut
Durable Performance	There No Load	6,000 Cycles	4,500 Cycles
	Rated Load	4,500 Cycles	3,000 Cycles
Storage temp.		-35℃～+75℃(Operating Temp:)	

表面贴装 SMT

側向操作 LATERAL




精密部品 NICETY

可靠 STABILIZE

適合環保 RoHS

Unit:mm

NAME		MATERIAL	PLATING
①	上盖 Cover	SUS304-H(t=0.12mm)不锈钢【GND 焊点镀金 1u"】	AU/Ni
②	接触端子 Terminal	C5210-EH (t=0.15mm)磷铜【镍基 Ni50u" 镀金 2u"】	G/F
③	基座 INSERT MOLDING	LCP 耐热塑胶 (UL94V-0) BLACK	SET

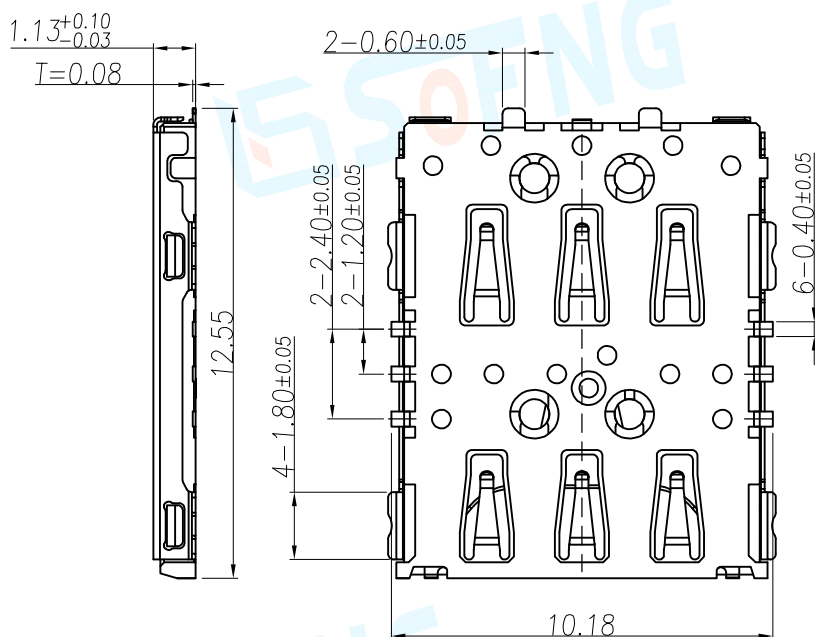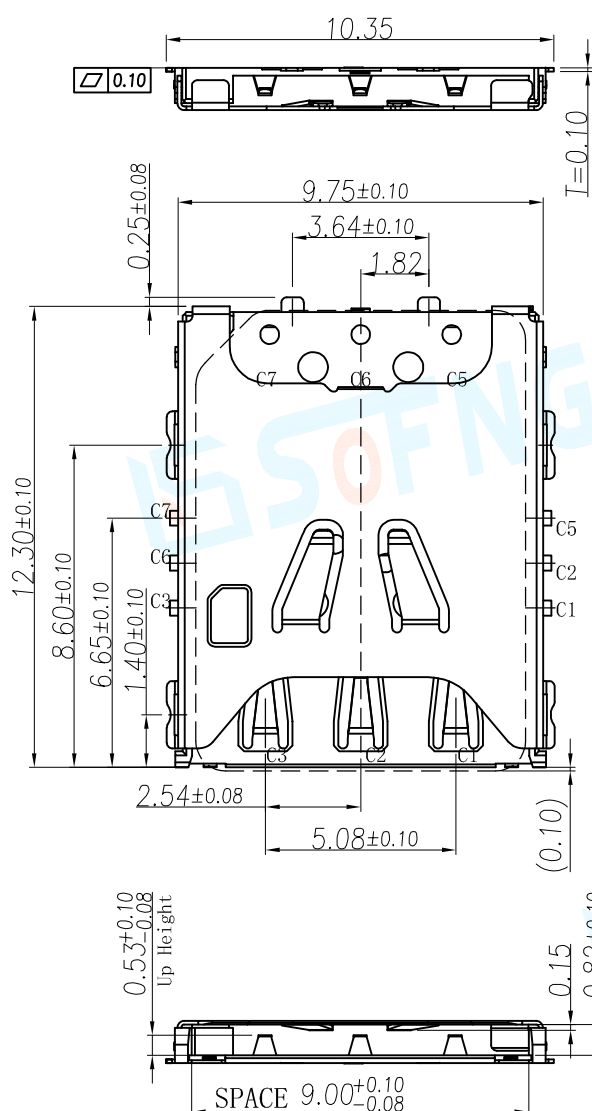


Operating Force

Insertion
Withdrawal

10N MAX. (1N.=100gram-force)
10N. MIN

Solder-ability (Max.)


IR Reflow:255°C, 5sec. Manual:350°C, 3sec.

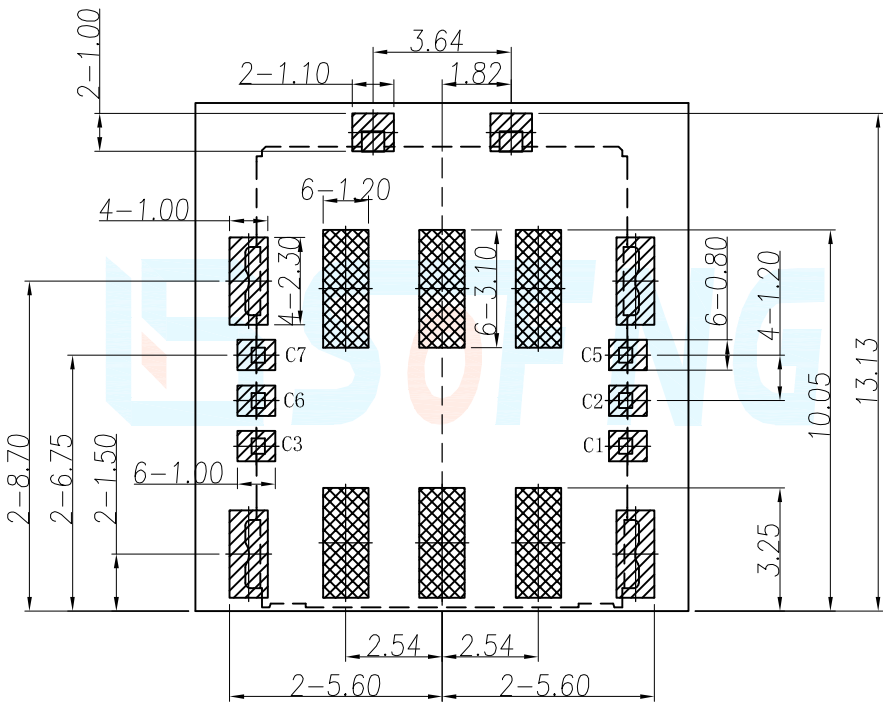

Pin definition


SIM CARD			
Pin No.	Pin NAME	Type	Description
C ①	卡電源	1	VCC
C ②	復位	1	RST
C ③	時鐘	1	CLK
C ⑤	接地	1	GND
C ⑥	Vpp	1	VPP
C ⑦	輸入/輸出	1	I/O
SW PIN	插卡检测	1	CARD DETECT

DECIMALS	ANGLES
.X :±0.20	X.° :±1.5°
.XX :±0.10	X.X° :±1.0°
.XXX :±0.05	XXX° :±0.5°

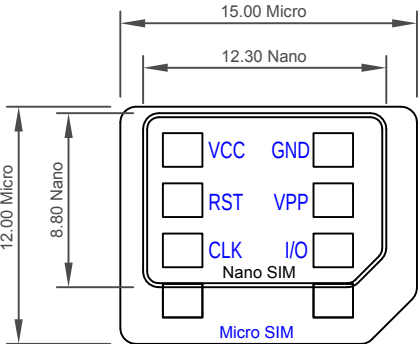

Reference

NANO-SIM

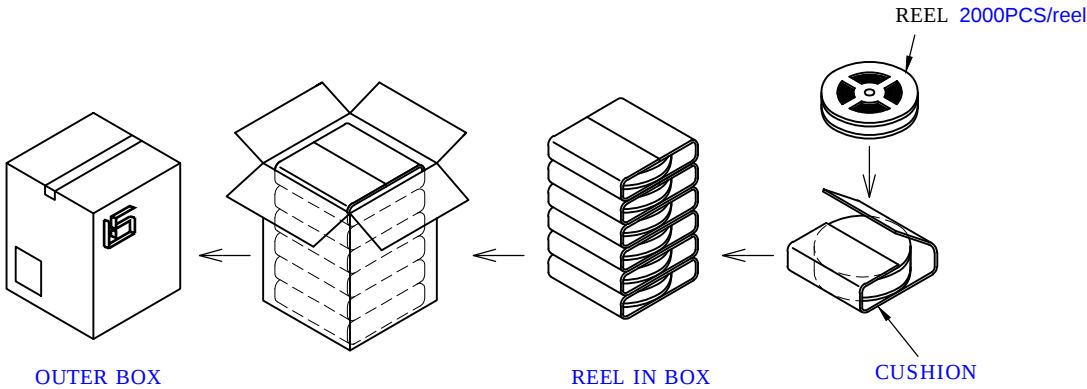

注記 NOTICE

1. 碩方公司擁有最終解釋權; The SOFNG company reserves the right of final interpretation;
2. 文件禁止外洩、轉載; Leaked and reproduced prohibited;
3. 未經授權修改無效。Modify is invalid.