

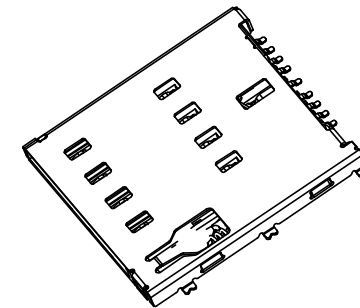


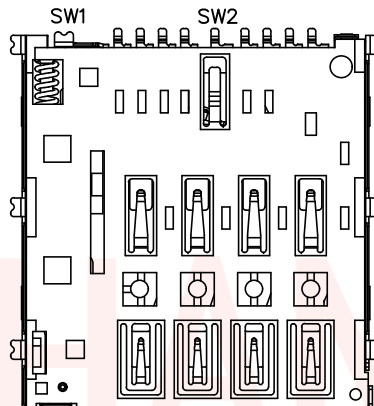


REV.	ECN NO OR DESCRIPTION	REVISED	DATE

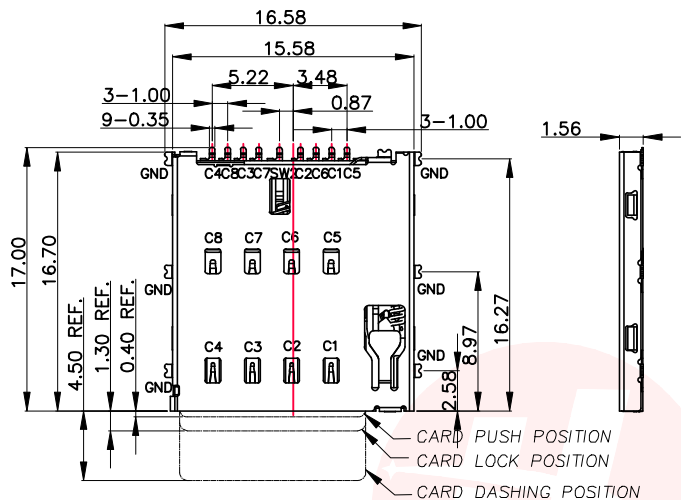

- NOTES:
- MATERIAL:
 - Housing:High Temperature Thermoplastic UL94V-0; Color Black.
 - Terminal:Copper Alloy.
 - Shell:Stainless Steel.
 - SPECIALITY:
 - Rated current:1.0A
 - Rated voltage:50V
 - Contact Resistance:100mΩ MAX
 - Insulation Resistance:1000MΩ MIN 500V DC
 - Dielectric withstanding voltage: 500V AC.
 - Solder ability:255±5℃, 5±0.5s.
 - Durability:5000 Cycles Min.
 - Operating condition:Temperature-40℃~+85℃; Humidity 80% R.H MAX
 - PLEASE CONTACT JITS SALES REPRESENTATIVE TO VERIFY PRODUCT DETAILS & AVAILABILITY

DETECT SWITCH		
CARD INSERTING POSITION	CLOSE	
NO CARD	OPEN	

Card is not inserted;
Sw2 and Sw1/GND pin is open
Card is inserted;
Sw2 and Sw1/GND pin is close

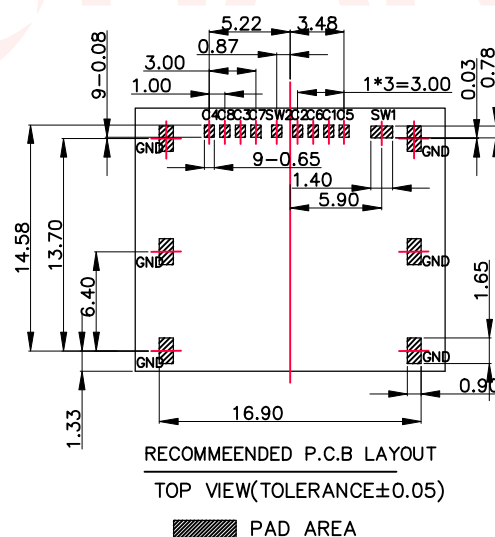

6	Housing	1PC	LCP UL94V-0	BLACK		
5	LINK	1PC	SUS304			
4	SPRING	1PC	SWP-B	plating Ni: 30u”min		
3	Slider	1PC	LCP UL94V-0	BLACK		
2	COVER	1PC	SUS304	Slider platingAu: 1u”,Ni: 30u”min		
1	Terminal	1PC	C5210-EH,T=0.10	Contact Au: 1u”,platingAu: 1u”,Ni: 50u”min		
NO	Description	Dosage	Material	Color/plating		
UNLESS OTHERWISE SPECIFIED TOLERANCES			 东莞市汉博电子科技有限公司 DONGGUAN HANBO TECHNOLOGY CO., LTD			
DECIMALS: ANGLES:		TITLE MICRO SIM 1.56mm 9PIN switch				
X :±0.30	X :±2°	DWN	xiong	PART NO. SMO-1029-P9		
X.X :±0.20	X.X :±1°	CHKD	lee	SCALE:1:1	UNIT: mm	
X.XX :±0.10		APVD	wang	SIZE: A4	SHEET:10F 1	REV: A4
CUSTOMER COPY						