

Kinghelm®

Rev	ECN NO	Content of the changes	Principal	Date
Rev		重新发行图纸	TSM	2012-12-25

NOTE :


1. SPECIFICATION:

- 1.1. CURRENT RATING: 0.5 Amp Max.
- 1.2. VOLTAGE RATING: 40 V ac(r.m.s) Max.
- 1.3. CONTACT RESISTANCE: 10m ohms Max.mated
- 1.4. INSULATION RESISTANCE:100M ohms Min.
- 1.5. DIELECTRIC WITHSTANDING VOLTAGE:
AC 500V Min. (for 1 minute)
- 1.6. OPERATION TEMPERATURE RANGE:-25° C~85° C

2. MECHANICAL

- 2.1. INSERTION FORCE:4.5KGF MAXMUM
- 2.1. WITHDRAWAL FORCE:1.0KGF MINIMUM;4.0KGF MAXMUM
- 2.3. DURABILITY:10000 CYCLES AT 100±50 CYCLES PERHOUR, CONTACT CHANCE FROM INITIAL VALUE:30MINI Ohms MAX

"▲"为品管重点管控尺寸

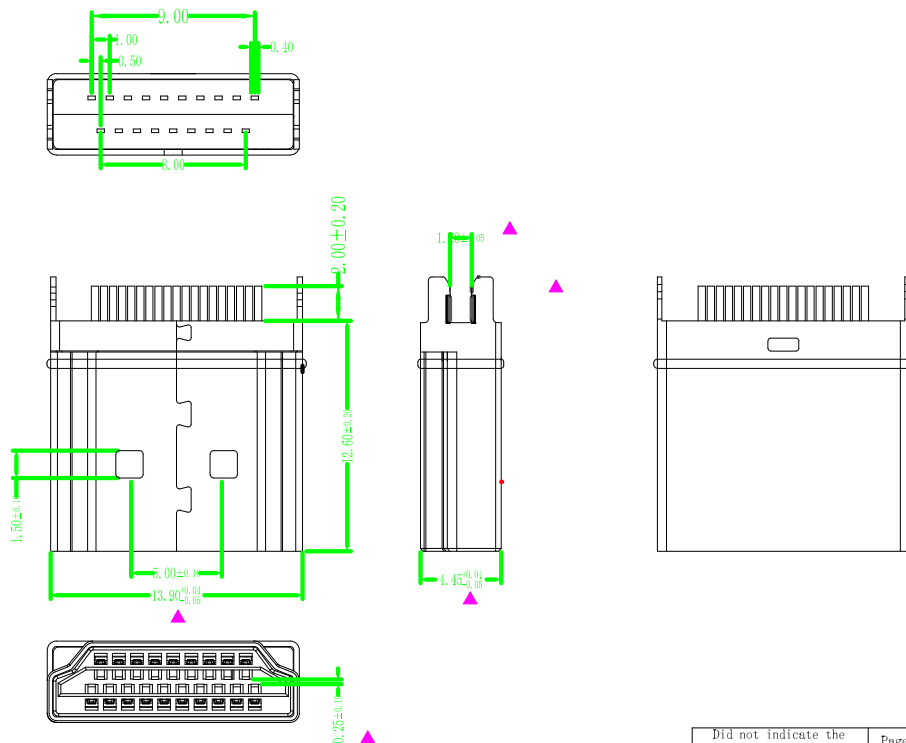

Did not indicate the tolerance list		Page/Size	1/1 A4	深圳市金航标电子有限公司	www.kinghelm.com.cn
X. ±0.20	X. ° ±3°	Unit	MM	KH-HDMI-0021-JBS	
.X ±0.10	.X ° ±2°	Rev	A1	Item NO	HDMI AM 英板式1.2mm 直针 1=2.0 A款有凸筋
.XX ±0.05	.XX ° ±1°	Drawing		Part NO	
.XXX ±0.02	.XXX ° ±0.5°	Checked		DWG NO	
Scale: 1:1	⌀	Approved			