

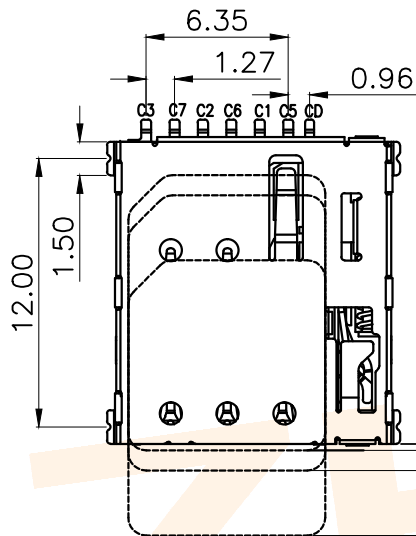
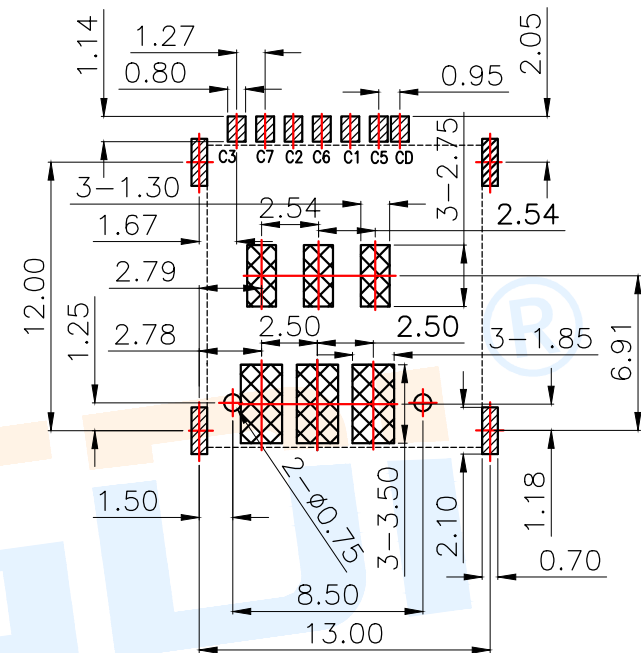


RoHS

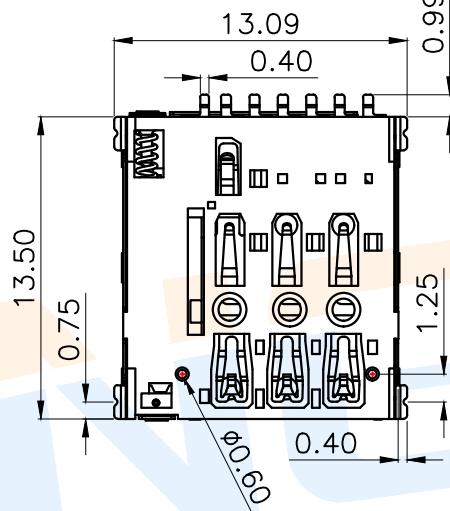



(0.65±0.3) PUSH STROKE POSITION
(1.50±0.3) CARD LOCK POSITION
(4.20±0.3) CARD EJECT POSITION

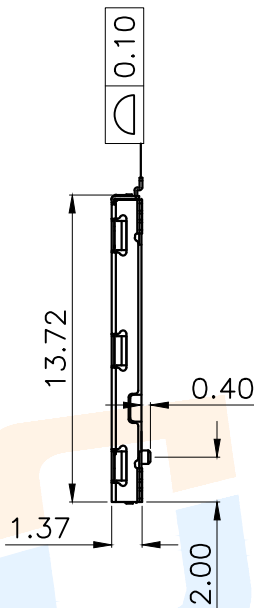


RECOMMENDED PCB LAYOUT
GENERAY TOLERANCE ±0.05

▨ PAD
▩ KEEP OUT AREA

- Specifications/技术规格:
- 1.Current rating/额定电流: 1.0A
 - 2.Voltage rating/额定电压: 30V AC/DC
 - 3.Insulation Resistance/绝缘电阻: 100MΩ Min 500V DC
 - 4.Dielectric Withstanding/ 耐电压: 500V AC/minute
 - 5.Contact Resistance/ 接触电阻: 100mΩ Max
 - 6.Durability/ 耐久性: 5,000 Insertions
 - 7.Operating Temperature/ 工作温度: -40℃ to +85℃

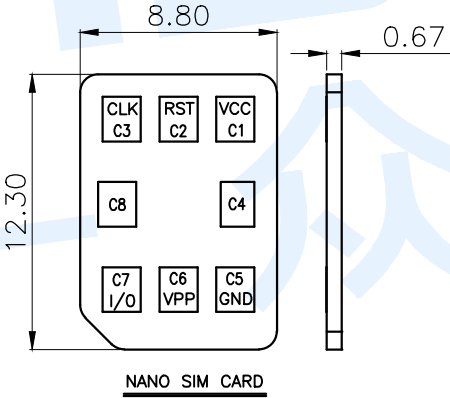

SIM pin assignment	
PIN#	Name
C1	VCC供电电压
C2	RST重置
C3	CLK时钟
C5	GND接地
C6	VPP程序电压
C7	I/O输入输出
CD	Detect Switch

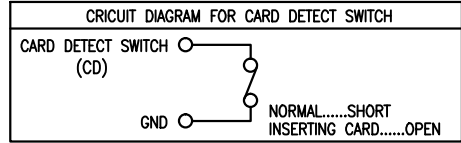

Ⓕ	Terminal		7	Phosphor bronze	Au plated
Ⓖ	Bullet		1	SUS	
Ⓓ	Spring		1	SUS	
Ⓒ	Contact		7	Phosphor bronze	Au plated
Ⓑ	Cover		1	SUS	Ni Plating
Ⓐ	Base		1	LCP	Black
NO.	Name	Number	Qty	Materil	Remarks

ZHONGDI® Zhongdi Electronic Technology Co., Ltd

design	date	name	NANO SIM CARD CONNECTOR
Review	date	model	NANO-SIM-0500A-P
Approved	date		

Drawing number: Proportion 1:1 unit mm gage number A4



modify Review Approved Tolerance not specified

RoHS

客户拉出方向

NOTES

1. 每卷包装数量:1500PCS/每卷
2. 卷带包装方式:

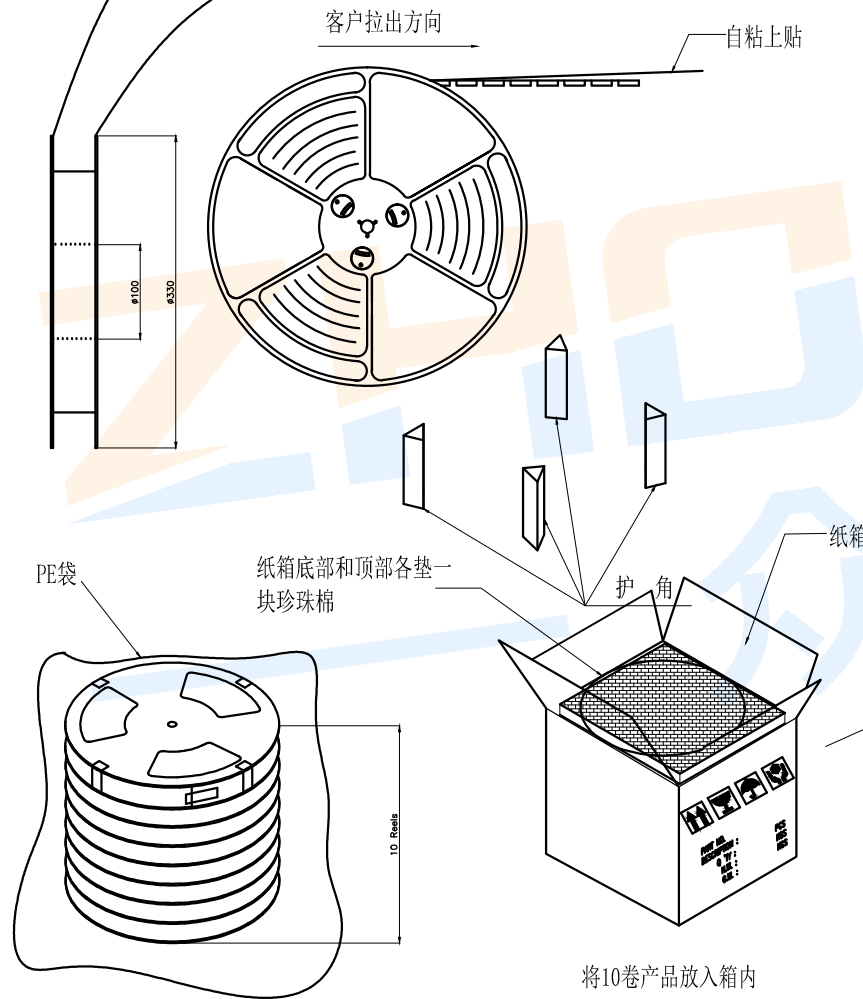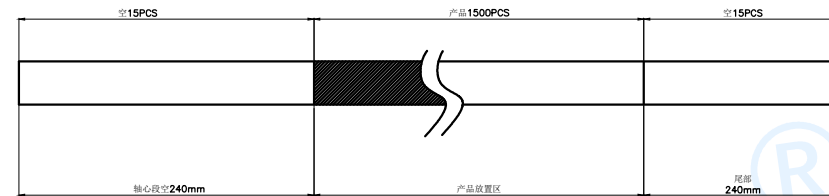

封箱胶带“工”字形封好

ZHONGDI® Zhongdi Electronic Technology Co., Ltd

design	date	name	NANO SIM CARD CONNECTOR
Review	date		
Approved	date	model	NANO-SIM-0500A-P

Drawing number:	Proportion	1:1	unit	mm	gape number	A4
-----------------	------------	-----	------	----	-------------	----