
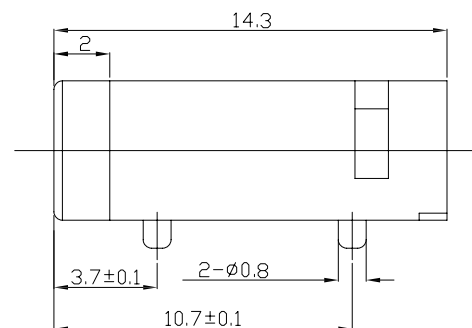


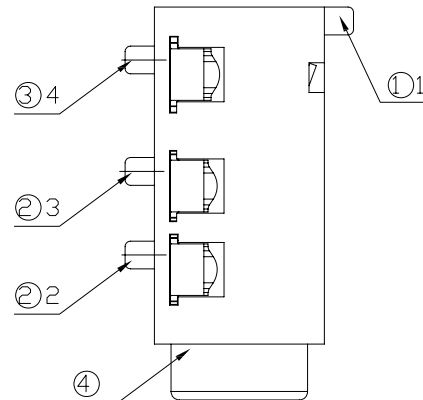

1. 额定电负荷: 30V•0.5A;
2. 接 触 电 阻: $\leq 0.03 \Omega$;
3. 绝 缘 电 阻: $\geq 100M \Omega$;
4. 耐 压: AC500V (50Hz)/min;
5. 插 拔 力: 3~20N;
6. 寿 命: 5,000次。
7. 耐 焊 接 性: Nylon材料过高温 $260^{\circ} \pm 5^{\circ}$

序号	名称	材料	备注
1	基座	锡青铜带	
2	簧片	锡青铜带	
3	接触片	PA工程塑料	

		new		2015/5/3		A		瀚源	
ECN BO.		DESCRIPTION.		DATE.		REV.			
DESIGNED	CHECKED	APPROVAL	DRAWING NUMBER			SCALT: 1/2		SCALE: 3:1	
Mikey	Tom	Jerry	PART NAME	PJ-320D	UNLESS OTHERWISE SPECIFIED,TOLERANCE:		X.	±0.25	
			MODEL NAME	PJ-320D			X.x	±0.20	
			3RD ANGLE PROJ	HanElectricity Co.,LTD				X.xx	±0.15
								ANGULAR	±3°
								FILE.NO.	