


Operation:DIP/3.5&插件式音频插座



LTEM NO.:PJ-325

(L18.0×W8.2×H12.3mm 3.5-PHONE-JACK)



Technical parameter

PROJECT	LEVEL	A[better product]	B[average product]
Electrical Properties	Contact Rating	25mA, 24V DC	
	Initial Contact Resistance	30mΩ max.	50mΩ max.
	Insulation Resistance	100MΩ min.500V DC	Skey/PD: 100MΩ min.300V DC
	Withstand Voltage	500V AC for 1 minute	350 V AC for 1 minut
	There No Load	6,000 Cycles	5,000 Cycles
Durable Performance	Rated Load	5,000 Cycles	4,000 Cycles
	Storage temp.	-25℃~+75℃(Operating Temp:)	

入板插装 DIP




側向導入 LATERAL

精密部品 NICETY

可靠 STABILIZE

適合環保 RoHS

Unit:mm

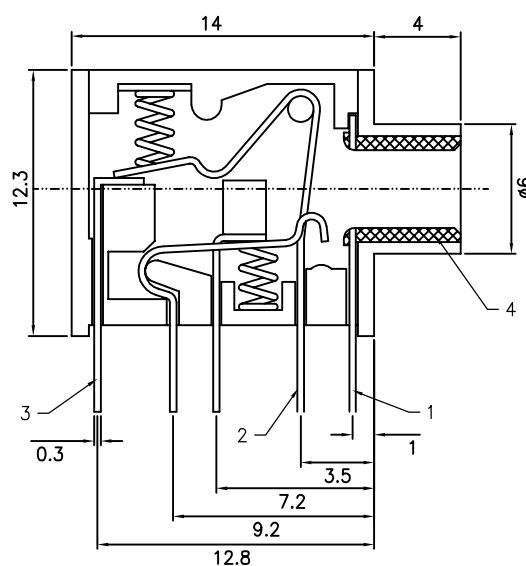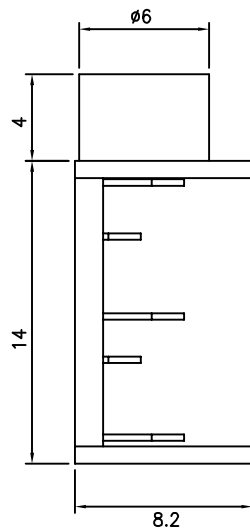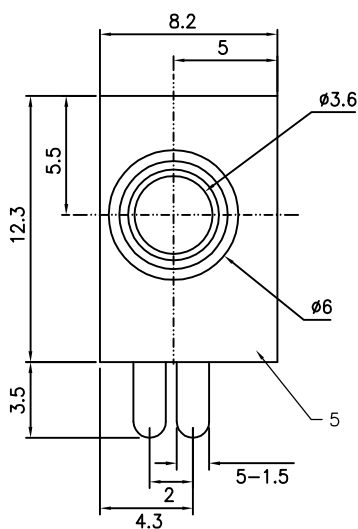


5POLE PLUG



Operating Force

Inward
Exiting

5. 0N~15. 0N (grams)
5. 0N~15. 0N (grams)

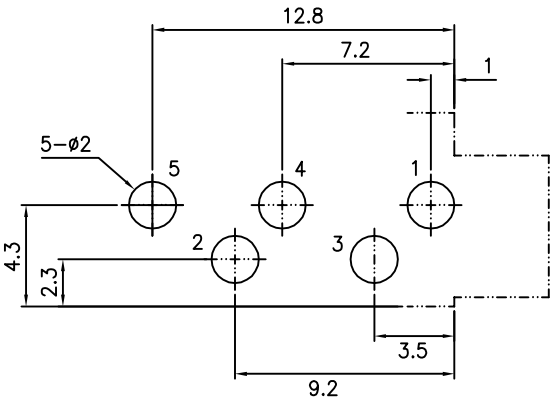

Pin Definition



Material declaration

No.	NAME	Type	Description
①	上盖	1	PBT (Black)热塑塑胶
②	基座	1	PBT (Black)热塑塑胶
③	铜套	1	H62 黄铜 (棒)[镍基]
④	接觸端子	2	H62 (t=0.30mm)黄铜[银基]
⑤	下压弹片	2	C5191R-H (t=0.30mm)磷铜[银基]
⑥	接地端子	1	H62 (t=0.30mm)黄铜[银基]



本品不屬於危害性廢棄物,須丟棄時可以委託
回收商予以回收再生處理。
Products do not belong to •

注記 NOTICE

1. 碩方公司擁有最終解釋權； The company reserves the right of final interpretation;
2. 文件禁止外洩、轉載； Leaked and reproduced prohibited;
3. 未經授權修改無效。 Modify is invalid.

運送時本產品不要直接與水、酸鹼性化學物質
接觸,或放置於含有以上氣體環境中,並且需要
注意會有滑落、側翻的危險發生；運輸過程中
不能有碰撞或者擠壓,須保證溫度與濕度適中
[常溫 25℃,濕度在 50℃以內],不可導致材料變
形或氧化。