


由Autodesk教育版产品制作

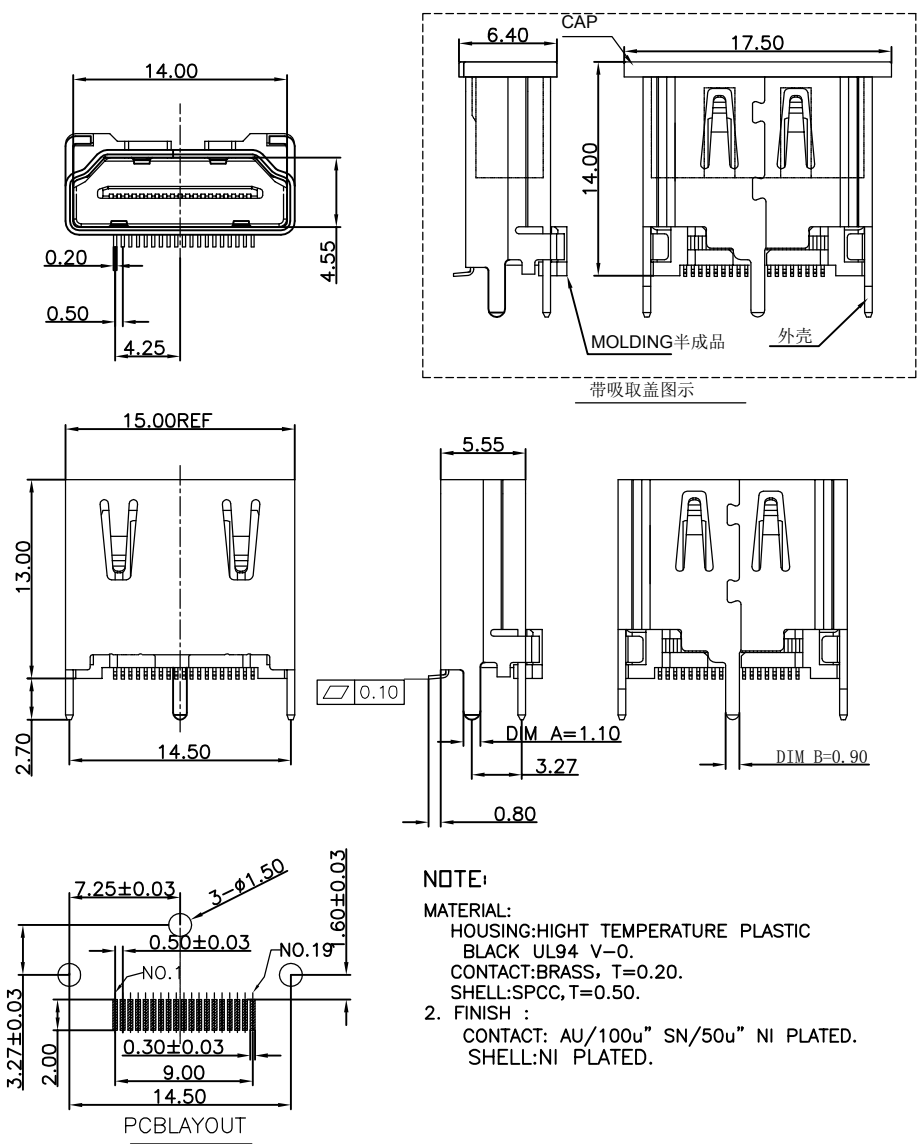

NOTE:

1.MECHANICAL CHARACTERISTICS
INSERTION FORCE: 44.1N MAX
EXTROCTION FORCE: 9.8N MIN, 39.2N MAX
MOTING CYCLE:10000 CYCLES

2.ELECTRICAL CHARACTERISTICS
RATING CURRENT: 0.5A
RATING VOLTAGE: 40V
CONTACT RESISTANCE: 10 MILLOHMS OHMS MAX INITIAL.
CHANGE 30 MILLOHMS OHMS MAX AFTER TEST.

INSULATION RESISTANCE:
a, UNMATED: 100M OHMS MIN AT 500 VDC
b, MATED: 10M OHMS MIN AT 150 VDC

DIELECTRIC WITHSTANDING VOLTAGE:
UN MATED CONNECTOR 500V AC/1MINUTE
MATED CONNECTOR 300V AC/1MINUTE

OPERATING TEPEATURE: -55°C--+105°C

1751 - 005 - XX

系列码
HDMI 立贴
类别码
005:立贴13H
流水码
01:窄脚铁壳镀镍1u" LCP黑盘装
02:窄脚铁壳镀镍1u" LCP黑带吸取盖卷装

NOTE:

MATERIAL:
HOUSING:HIGHT TEMPERATURE PLASTIC
BLACK UL94 V-0.
CONTACT:BRASS, T=0.20.
SHELL:SPCC, T=0.50.

2. FINISH :
CONTACT: AU/100u" SN/50u" NI PLATED.
SHELL:NI PLATED.

				OPERATI ON		SCALE		Fi t	Yxcon 东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co.,Ltd.		
				X. X	± 0.35	UNIT		MM			
				X. XX	± 0.25	SI ZE	A4	DESI GN	赵文品2024. 11. 06	PART NQ	HDMI-1751-005-02
				X. XXX	± 0.05						
				Angl e	± 2°	SHEET	1/1	CHECK		TI TLE:	HDMI 立贴母座13mm窄脚铁壳镀锡1u LCP黑
REV	DATE	SYMBOL	MODI FI CATI ON DESORI PTI ON	DIM	TOL	PRQJ.		APPROVE		Cust oner No.	