

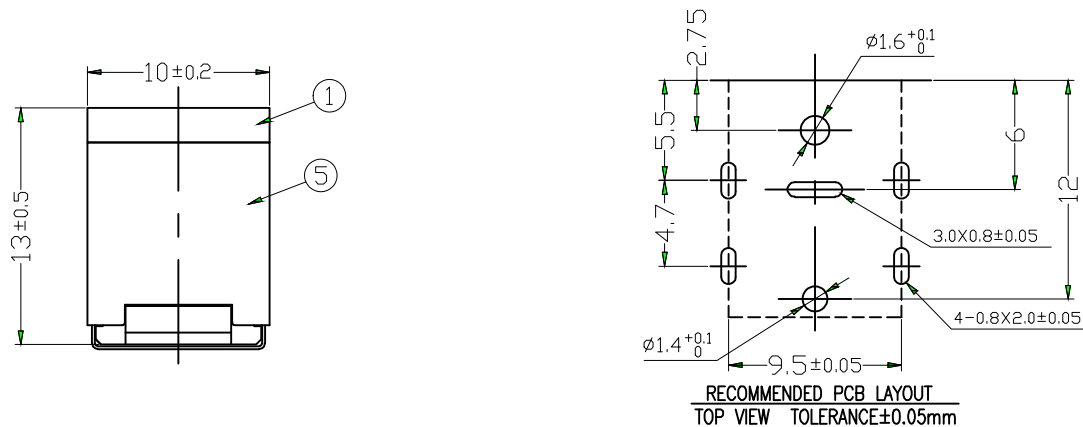

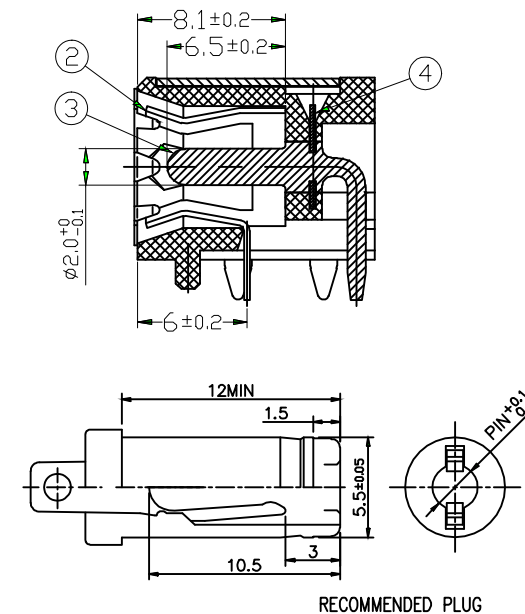


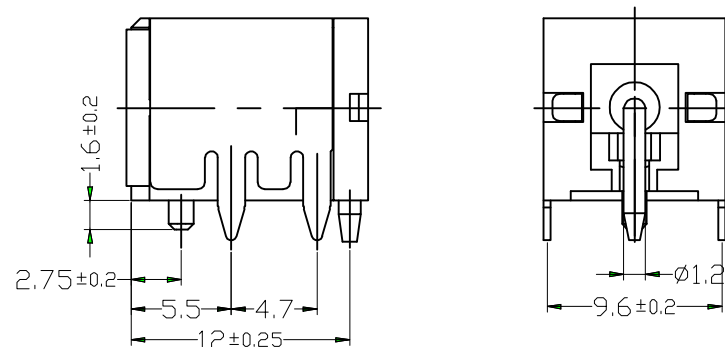

ELECTRICAL
RATING:DC 20V 7A:
CONTACT RESISTANCE:30mΩ MAX
INSULATION RESISTANCE: 100 MΩ MIN.
DIELECTRIC WITHSTAND VOLTAGE: 500V AC
INSERTION FORCE:3-30N.
DURABILITY TEST: 5,000 CYCLES.
TEMPERATURE RANGE: -25°C TO +70°C
MATERIALS & PLATING: SEE THE TABLE BELOW.

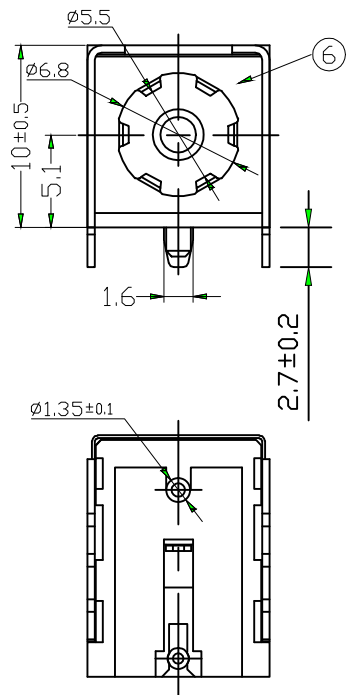

6	不锈钢盖	1	T = 0.15	—
5	外壳	1	H 65 T = 0.3	镀铜锡
4	插片	1	T = 0.2	—
3	中心针	1	H 59	镀银
2	包圆端子	1	QSn6.5-0.3 T = 0.3	镀银
1	塑料	1	PA9T UL94 V-0	黑色
NO.	PART NAME	QT*Y	MATERIAL	RFMARK

DC-007B-XX

中心针直径 (mm) : 20 : 2.0 , 25 : 2.5

		new		2015/5/3		A		瀚源	
ECN BO.		DESCRIPTION.		DATE.		REV.			
DESIGNED	CHECKED	APPROVAL	DRAWING NUMBER			SCALT: 1/2		SCALE: 3:1	
Mikey	Tom	Jerry	PART NAME	DC-007B-XX	UNLESS OTHERWISE SPECIFIED,TOLERANCE:		X.	±0.25	
			MODEL NAME	DC-007B-XX			X.x	±0.20	
			3RD ANGLE PROJ	HanElectricity Co.,LTD				X.xx	±0.15
							ANGULAR	±3°	
							FILE.NO.		