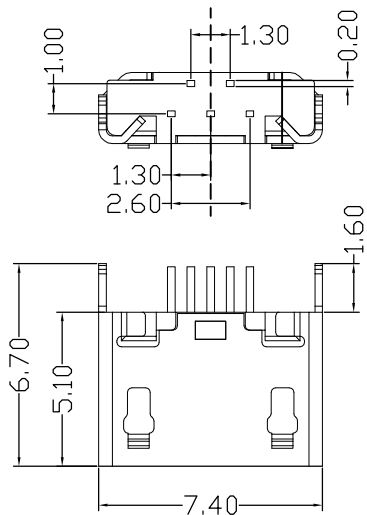


RECOMMENDED PCB LAYOUT
TOLERANCE: ± 0.05

NOTES:

1. MATERIAL:

1.1 HOUSING: THERMOPLASTIC FLAMMABILITY RATING
UL94-0

1.2 CONTACT: COPPERY ALLOY T=0.15MM

1.3 SHELL: COPPERY ALLOY T=0.25MM

2. FINISH:

2.1 CONTACT:

1U" MIN, PLATED ON CONTACT AREA

G/F PLATING ON SOLDER TAIL AREA

50~80U" NICKEL UNDERPLATING OVERALL

2.2 SHELL:

80~120U" MATTER TIN PLATING ALL

50~80U" NICKEL UNDERPLATING OVERALL

3. SPECIFICATION:

3.3 CURRENT RATING: 0.5A (2.3.4 CONTACT) / 1.8A
(1.5 CONTACT) MAX.


3.2 VOLTAGE: 30 VAC

3.3 TEMPERATURE RANGE: -30°C ~ 85°C

3.4 CONTACT RESISTANCE: 30 MILLIONHM MAX.

3.5 DIELECTRIC WITHSTANDING VOLTAGE: 250VAC R.M.S.

3.6 INSULATION RESISTANCE: 100 MEGOHMS MIN

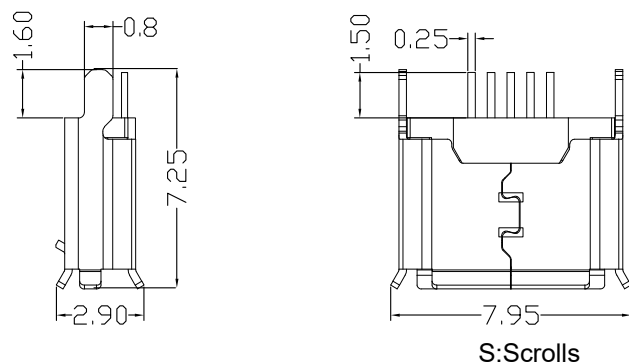

05XX-4BH70-X
1: AU 1U"
6: AU 30U"
T: TIN
N: NICKEL
S: Scrolls F: Flat

————		new		2015/5/3		A		瀚源
ECN BO.		DESCRIPTION.		DATE.		REV.		
DESIGNED	CHECKED	APPROVAL	DRAWING NUMBER				SCALT: 1/2	SCALE: 3:1
Mikey	Tom	Jerry	PART NAME	05XX-4BH70-X		UNLESS OTHERWISE SPECIFIED,TOLERANCE:	X. ±0.25	
			MODEL NAME	05XX-4BH70-X			X.x ±0.20	
					X.xx ±0.15			
			3RD ANGLE PROJ	HanElectricity Co.,LTD			ANGULAIR ±3	
							FILE.NO.	