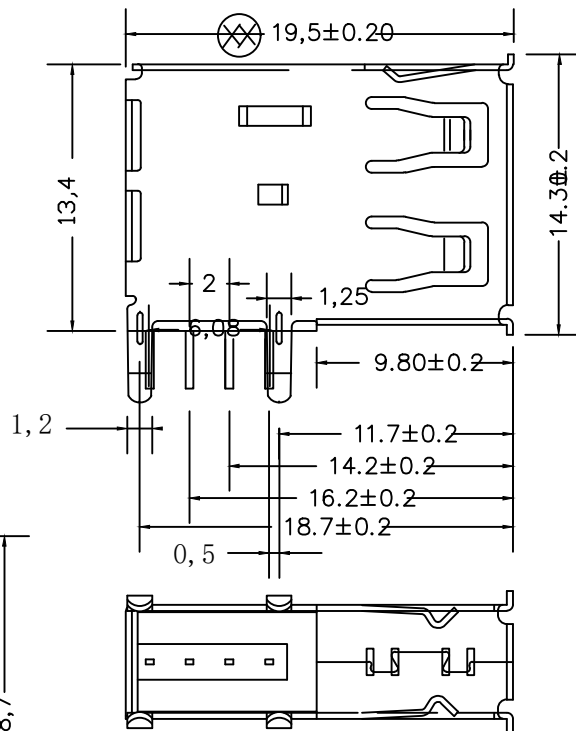
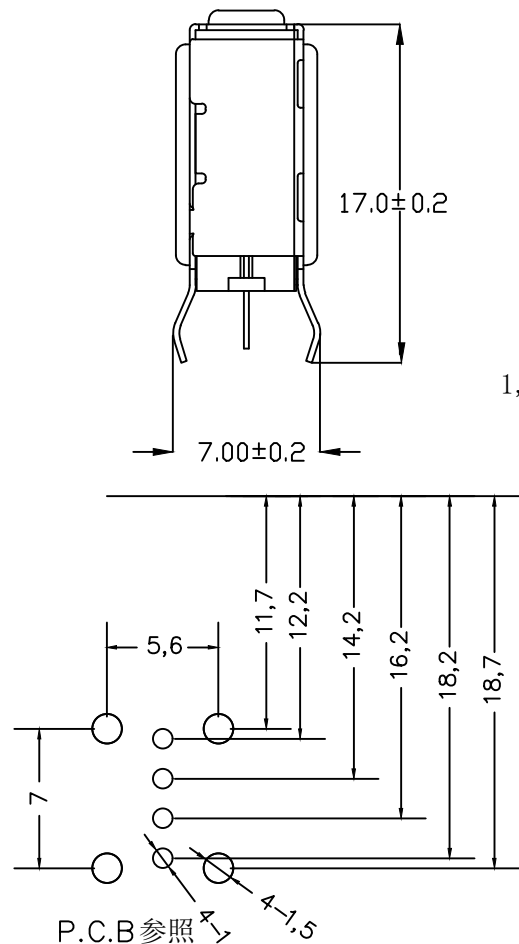


NOTES:

1. MATERIAL SPECIFICATION

- 1) INSULATION MATERIAL THERMOPLASTIC.
- 2) SHELL: COPPER ALLOY/SPCC, T: 0.30mm
PLATING: NICKEL
- 3) TERMINAL: COPPER ALLOY, T: 0.25mm
PLATING: GOLD/TIN PLATED.

2. ELECTRICAL CHARACTERISTIC:

- 1) INSULATION RESISTANCE: 1000MΩ MIN.
- 2) CONTACT RESISTANCE: 30mΩ MAX.
- 3) WITHSTANDING VOLTAGE: 500V AC.


3. MECHANICAL CHARACTERISTICS:

- 1) INSERTION FORCE: 3.57Kgf MAX.
- 2) EXTRACTION FORCE: 1.02Kgf MIN.

ORDERING INFORMATION

保存环境: 干燥常温环境, 避免接触酸性和潮湿气候

04XN-1XU07-X
1: AU 1U"
6: AU 30U"
T: TIN
N: NICKEL
S: Scrolls F: Flat
B: Black W: White

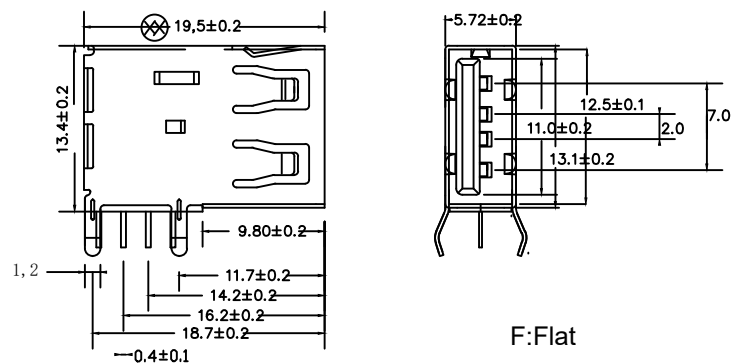

————		new		2015/5/3		A		瀚源	
ECN BO.		DESCRIPTION.		DATE.		REV.			
DESIGNED	CHECKED	APPROVAL	DRAWING NUMBER			SCALT: 1/2			SCALE: 3:1
Mikey	Tom	Jerry	PART NAME	04XN-1XU07-X		UNLESS OTHERWISE SPECIFIED,TOLERANCE:	X. ±0.25		
			MODEL NAME	04XN-1XU07-X			X.x ±0.20		
					X.xx ±0.15				
			3RD ANGLE PROJ	HanElectricity Co.,LTD				ANGULAIR ±3	
								FILE.NO.	