
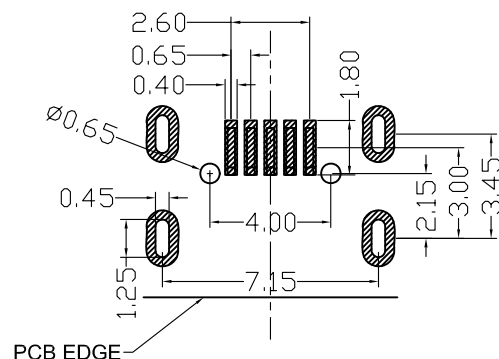
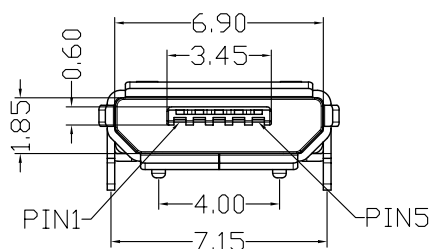
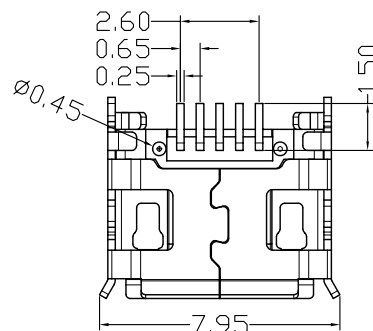




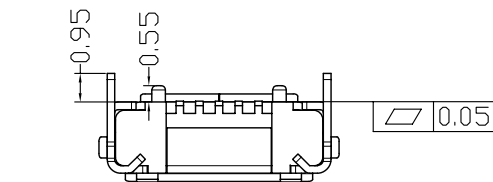

RECOMMENDED PCB LAYOUT
TOLERANCE: ± 0.05

NOTES:

- MATERIAL:
 - HOUSING: THERMOPLASTIC FLAMMABILITY RATING UL94-0
 - CONTACT: COPPERY ALLOY T=0.15MM
 - SHELL: COPPERY ALLOY T=0.25MM
- FINISH:
 - CONTACT:
 - 1U" MIN, PLATED ON CONTACT AREA
 - G/F PLATING ON SOLDER TAIL AREA
 - 50~80U" NICKEL UNDERPLATING OVERALL
 - SHELL:
 - 80~120U" MATTER TIN PLATING ALL
 - 50~80U" NICKEL UNDERPLATING OVERALL
- SPECIFICATION:
 - CURRENT RATING: 0.5A(2.3.4CONTACT)/1.8A (1.5CONTACT) MAX.
 - VOLTAGE: 30 VAC
 - TEMPERATURE RANGE: -30°C~85°C
 - CONTACT RESISTANCE: 30 MILLIONHM MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE: 250VAC R.M.S
 - INSULATION RESISTANCE: 100 MEGOHMS MIN

05XX-4BH806-S
1:AU 1U"
6:AU 30U"
T:TIN
N:NICKEL
S:Scrolls F:Flat

_____		new		2015/5/3		A		瀚源	
ECN BO.		DESCRIPTION.		DATE.		REV.			
DESIGNED	CHECKED	APPROVAL	DRAWING NUMBER				SCALT: 1/2	SCALE: 3:1	
Mikey	Tom	Jerry	PART NAME	05XX-4B806-S		UNLESS OTHERWISE SPECIFIED,TOLERANCE:	X. ±0.25		
			MODEL NAME	05XX-4B806-S			X.x ±0.20		
					X.xx ±0.15				
			3RD ANGLE PROJ	HanElectricity Co.,LTD				ANGULAIR ±3	
								FILE.NO.	