



SPECIFICATIONS

Current Rating:3.0AMP

Contact Resistance:10mΩ Max

Dielectric Strength:Min 1000V RMS

Operation Temperature:-40°C to +105°C

Contact Material:Brass


Contact Clip(4/6 finger):Becu(C17200)

Accepted Pin:Ø0.40 to 0.60mm


Insulator Material:Polyester(UL94V-0)

Standard: PPS

Soldering temperature: 260°C±5° 5S


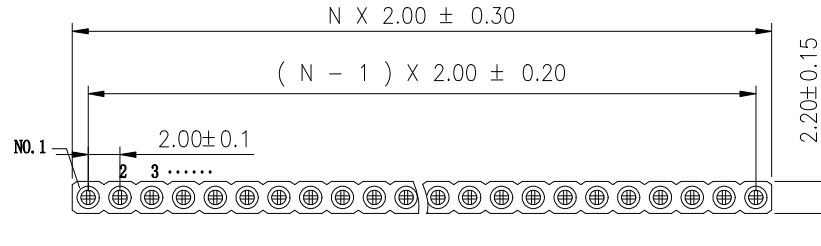


注：整条总长+0.8

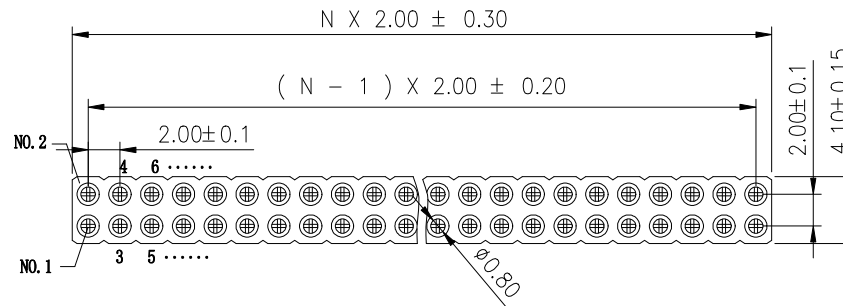

注：整条总长+0.5

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

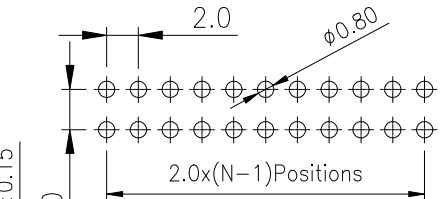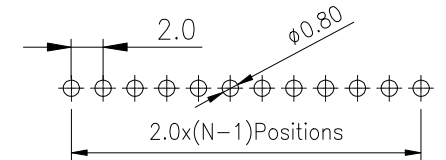

Ordering Information



3622 28 X XX S XX 074 01

Insulator Type
Code
1:Single row
2:Double row

No. of
Pins
1~40P
2~40P

Contact Plating
G0:Gold Flash
S0:Gold Flash/Tin
S1:3u" Gold/Tin
S2:5u" Gold/Tin
S3:10u" Gold/Tin
S4:15u" Gold/Tin

Length
074=7.4mm

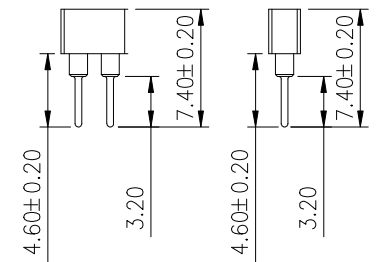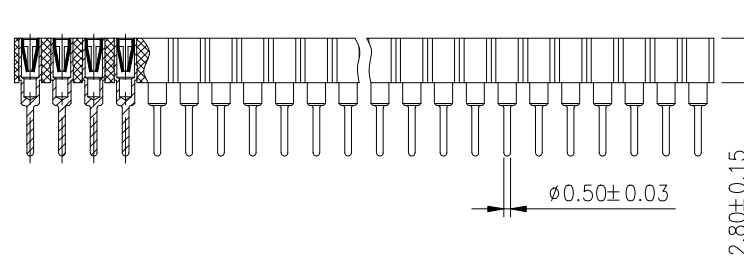

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

CHECK

APPROVE

yi yusheng

18.12.13

SCALE

UNIT

SIZE

SHEET

PROJ.

FIT

mm

A4

1.5/1

PROJ.

JILN® 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONICS CO.,LTD

Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

PART NO.

362228XXXSXX07401

TITLE:

2.0x2.8mm Machine Socket L=7.4

A0

2018.12.13

NEW DRAWING

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

DIM

TOL

APPROVE

yi yusheng

18.12.13

SCALE

UNIT

SIZE

SHEET

PROJ.

FIT

mm

A4

1.5/1

PROJ.

PART NO.

362228XXXSXX07401

TITLE:

2.0x2.8mm Machine Socket L=7.4