


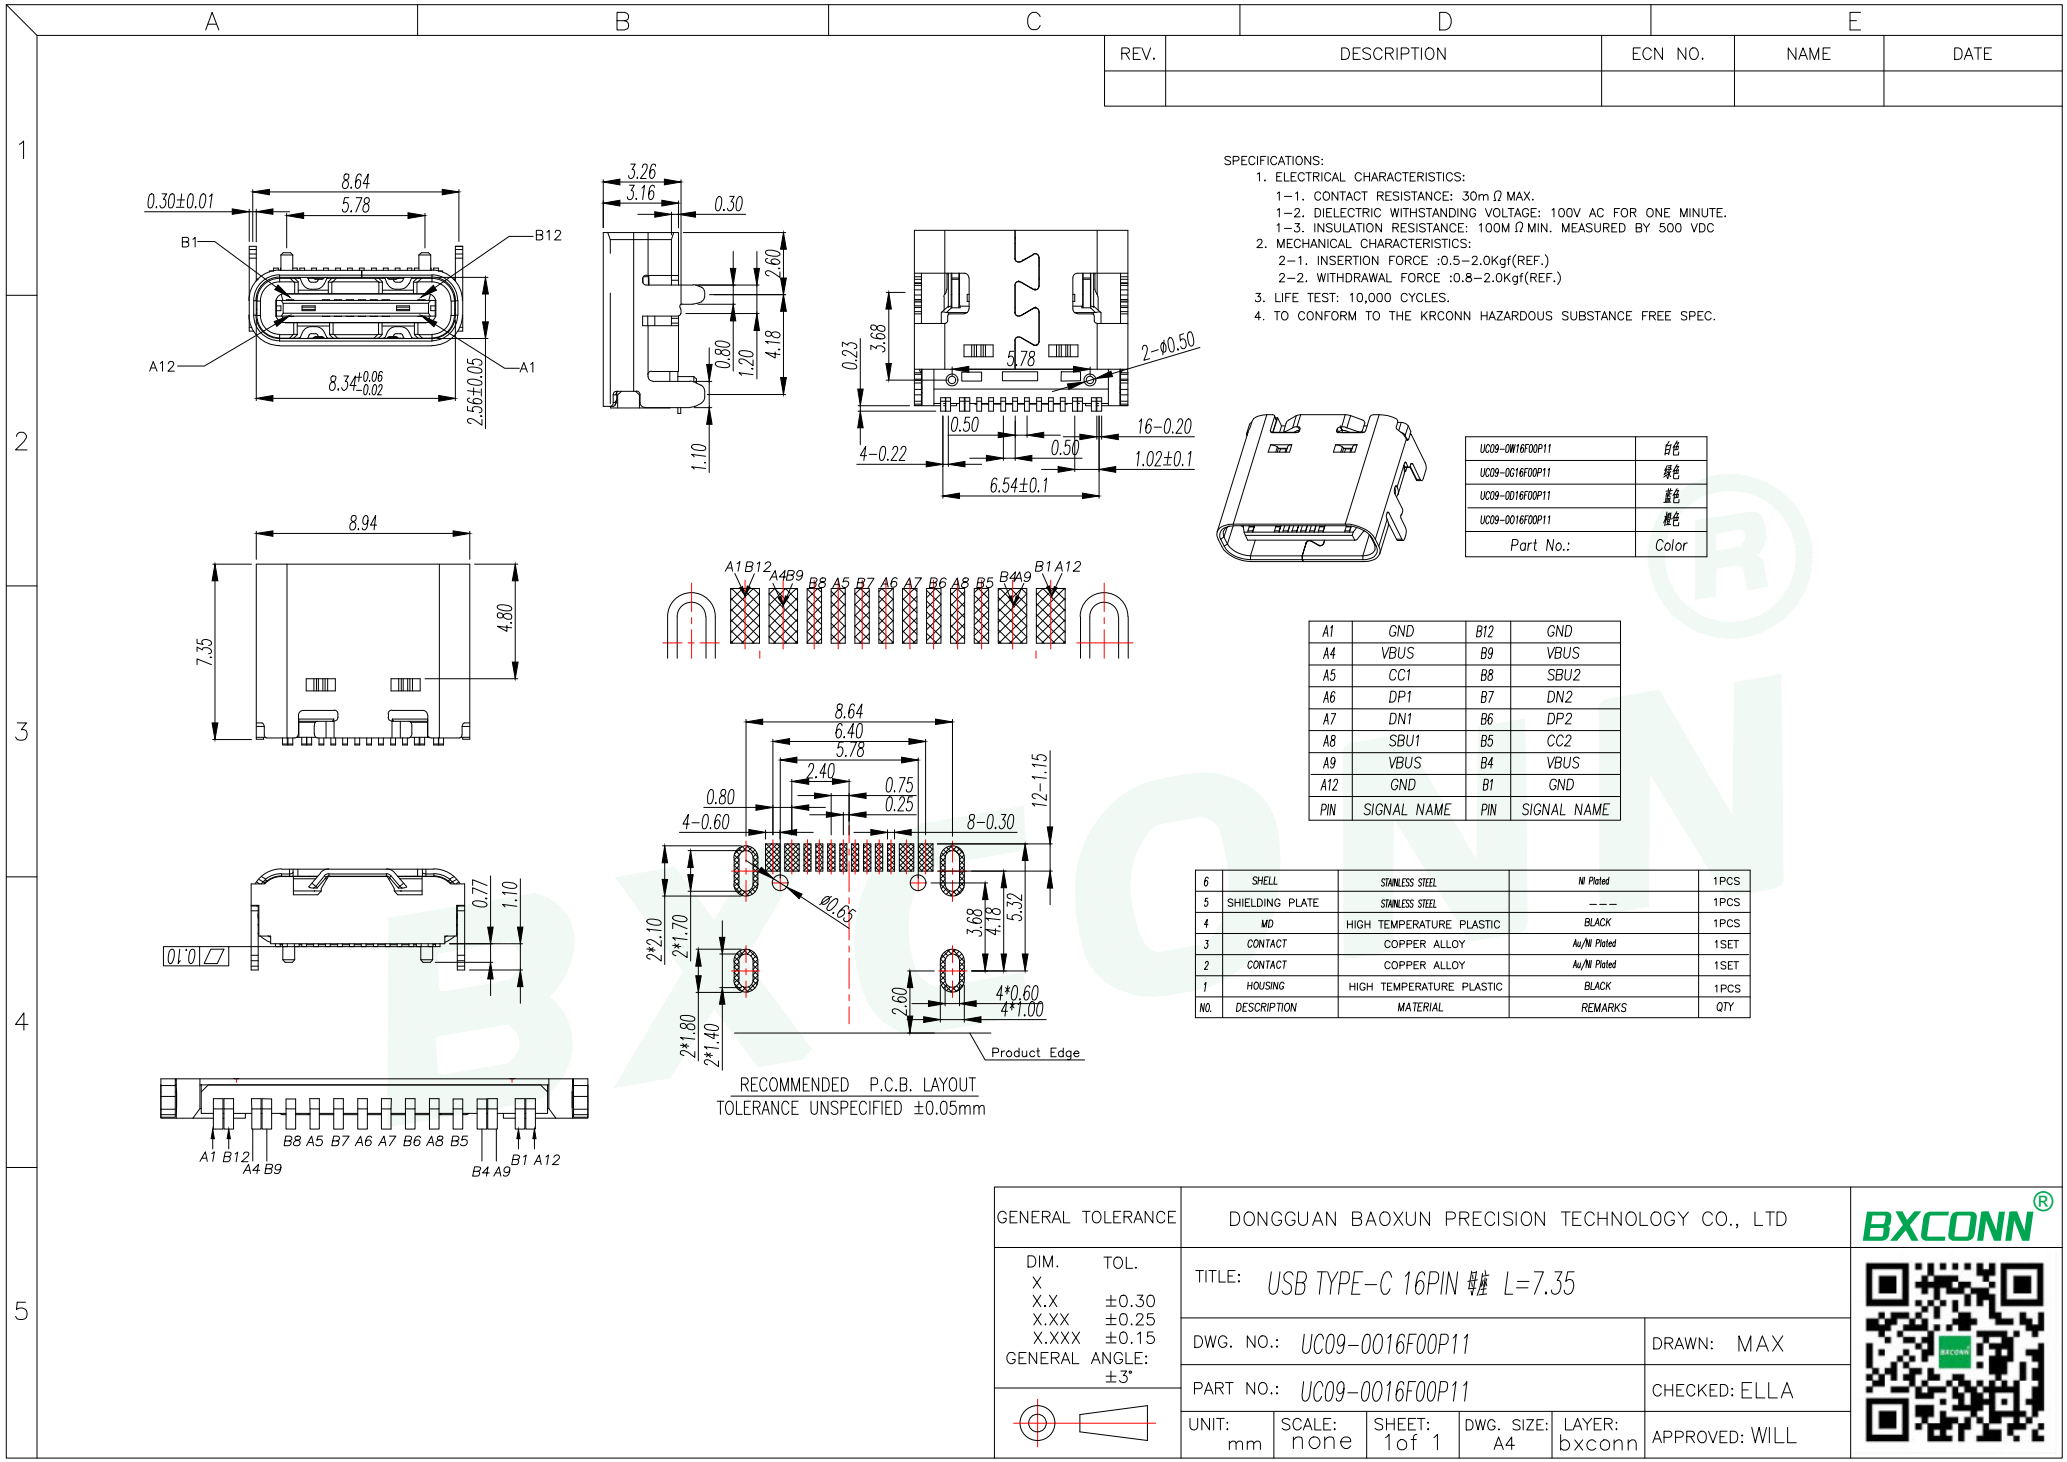

REV.	DESCRIPTION	ECN NO.	NAME	DATE

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:

1-1. CONTACT RESISTANCE: 30mΩ MAX.

1-2. DIELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR ONE MINUTE.

1-3. INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500 VDC


2. MECHANICAL CHARACTERISTICS:

2-1. INSERTION FORCE :0.5~2.0Kgf(REF.)

2-2. WITHDRAWAL FORCE :0.8~2.0Kgf(REF.)

3. LIFE TEST: 10,000 CYCLES.

4. TO CONFORM TO THE KRCONN HAZARDOUS SUBSTANCE FREE SPEC.



UC09-0W16F00P11	白色
UC09-0C16F00P11	绿色
UC09-0B16F00P11	蓝色
UC09-0D16F00P11	橙色
Part No.:	Color

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

6	SHELL	STAINLESS STEEL	Ni Plated	1PCS
5	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
4	MD	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
3	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

GENERAL TOLERANCE	DONGGUAN BAOXUN PRECISION TECHNOLOGY CO., LTD				
DIM.	TOL.	TITLE: USB TYPE-C 16PIN 母 L=7.35			
X					
X.X	±0.30	DWG. NO.: UC09-0016F00P11			
X.XX	±0.25	DRAWN: MAX			
X.XXX	±0.15	PART NO.: UC09-0016F00P11			
GENERAL	ANGLE:	CHECKED: ELLA			
	±3°	APPROVED: WILL			
		UNIT: mm	SCALE: none	SHEET: 1 of 1	DWG. SIZE: A4
				LAYER: bxconn	

