
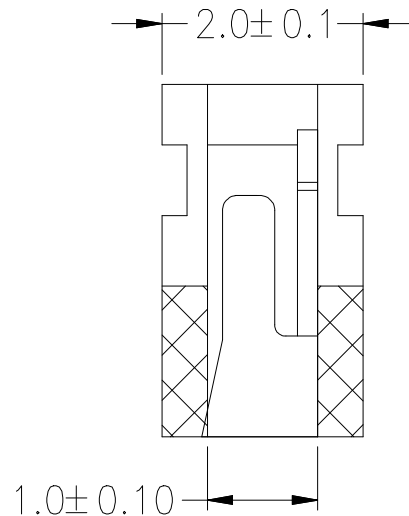


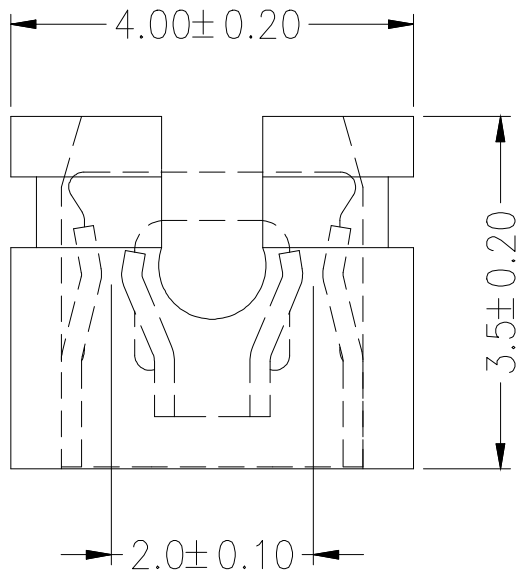

#### SPECIFICATIONS

Rated Current:1.5AMP

Contact Resistance:20mΩMax

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩMin

Operation Temperature:-40°C to +105°C

Contact Material: Brass

Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PBT

Max.Processing Temp: 180°C for 30-60 seconds  
(230°C for 10 seconds)

#### Ordering Information

HC-JP 200 - 1 - \*\* - \*\* - \* - \*\*

No.of Rows  
1=Single Type

Length  
(mm)  
35=3.5mm  
50=5.0mm

Type  
OP=Open  
CL=Close

Color  
B=Black  
L=Blue  
R=Red  
W=White  
Y=Yellow  
V=Green

Contact Plating  
G0:Gold Flash  
G1:1u" Gold  
G2:3u" Gold  
G3:5u" Gold  
G4:10u" Gold  
G5:15u" Gold  
G6:30u" Gold  
S0:Gold Flash/Tin  
S1:Tin

|           |                        |                   |                     |                   |                                                                                       |                                                                                                                                                 |                       |              |     |
|-----------|------------------------|-------------------|---------------------|-------------------|---------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|--------------|-----|
|           |                        |                   | GENE RL TOL E RANCE | 制 图<br>DRAWING    |                                                                                       |  深圳市华灿天禄电子有限公司<br>ShenzhenhuacantianluELECTRONICS CO., LTD |                       |              |     |
|           |                        |                   | DIM TOL             | 审 核<br>CHECK      |                                                                                       |                                                                                                                                                 |                       |              |     |
|           |                        |                   | X.X ±0.30           | 批 准<br>APPROVAL   |                                                                                       | 产品名称<br>TITLE                                                                                                                                   | 2.00 跳线帽 (开口)         | 版本<br>REV.   | A   |
| 1         | 初版发行                   |                   | X.XX ±0.20          | 比 例<br>SCALE      |                                                                                       | 产品料号<br>PART NO.                                                                                                                                | HC-JP200-1-35-0P-B-XX | 单 位<br>UNITS | mm  |
| 序号<br>No. | 变更内容<br>MODIFY CONTENT | 日期<br>MODIFY DATE | X.XXX ±0.10         | 投 影<br>Projection |  | 材 料<br>MATERIAL                                                                                                                                 |                       | 页 次<br>SHEET | 1/1 |
|           |                        |                   | Angle ±3.0°         |                   |                                                                                       |                                                                                                                                                 |                       |              |     |