
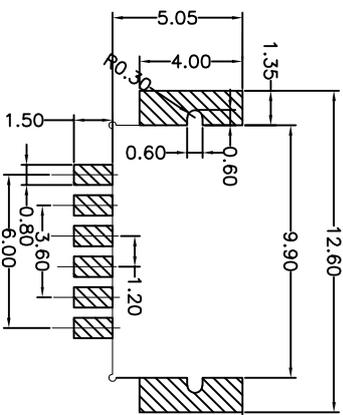



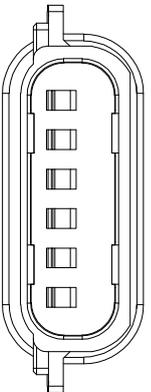


CUSTOMER

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

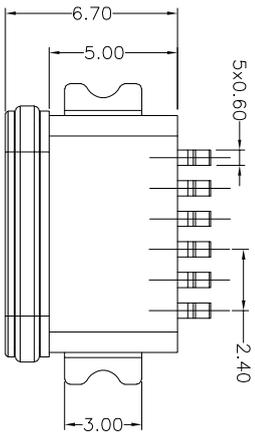

PCB LAYOUT 图仅供参考

- Note:
- Material:
    - Housing: LCP
    - Contact: C5191, t=0.20mm
    - Shell: Zinc Alloy.
  - ELECTRICAL:
    - CURRENT RATING: VBUS AND GND CONTACTS RATED AT 1.25A PARALLELED FOR A TOTAL OF 5A;
    - INITIAL CONTACT RESISTANCE :40 MEGOHMS
    - DIELECTRIC WITHSTANDING VOLTAGE: 100V AC MIN;
  - MECHANICAL CHARACTERISTICS:
    - MATING FORCE: 5~20N
    - UNMATING FORCE: 8~20N (INITIAL), 6~20N (AFTER 10000 CYCLES)
    - FREQUENCY: 200±50 CYCLES / HOUR, 10000 CYCLES
    - OPERATING TEMPERATURE : -40°~80°.
    - WATERPROOF: IP-X7.



TABLE B

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

TOLERANCE	NAME (INTENDED USE)	 Guangdong FYUO Precision Electronic Technology Co., Ltd.
X.X ±0.30 X.X' ±10' .XX ±0.20 .X' ± 8' .XXX ±0.10 .XX' ± 5'	CUSTOMER DRAWING	
UNITS	DESIGN: ZXM	DRAWG NO.
MATERILA	CHED:	FY23-018TC61F67-02
FINISH	APPD:	CF 6P防水沉板0.8 6. 7L
		SCALE
		SHEET
		REV.
		1/1
		1/2
		A